

Main Index



Index & Updates..... A01 - A02



Profiles

- Specification Pages..... A03 - A06
Technical Information..... A07 - A12
Scale Profile Drawings..... A13 - A34



Accessories

- Photos & Drawings..... B03 - B36



Sections

- Scale Elevations..... C03 - C48



Statics

- D01 - D02



Construction Drawings

- Corner Joint Details..... E03 - E05
ACET963R & ACET4950 Punch Tools..... E06
Variable angle Cleats..... E07
Bead Notching ACVD916..... E08
Drainage..... E09 - E11
Angled Sub Cill..... E12
Transom/Mullion Fixing Details..... E13 - E18
ETC4132 & ETC4133 Dummy Transoms..... E19
Friction Hinge Details..... E20 - E22
ACET4050 Hinge Details..... E23
Locking Details..... E24 - E26
French Casement Assembly..... E27 - E28
Glazing Details..... E29 - E37
Bay Pole Options..... E38 - E43
Horizontal Coupler Details..... E44
Fixing Strap Details..... E45
Trickle Vent Details..... E46



Sawing Tables..... F03 - F11

Updates

DATE	PAGE	DESCRIPTION
Nov. 2023	All	ACET842 changed to ACET841 when using UN3160G ETC4124 slim sash added ACET963 details added Bay pole, frame extension & coupler details updated/expanded ACET4050 hinge added
Jun. 2024	All	ETC4125 slim heritage sash & ETC4137 heritage transom/mullion added 'G' Profile options added to various sections with additional tooling UN3570 Trickle vent added
Aug. 2024	All	ETC4110, ETC4112 & ETC4120 Cleat chambers revised to accept ACET820 cleat.
Oct. 2024	All	Section B & E Crimping tools for 'G' profiles updated & glazing pages in Section E updated.
Jun. 2025	All	ETC4101, 4105, 4132, 4133, 4137, PCX55, UN3080, 3081, 3082, 3083 & 3270 sections added. ACET963 updated to ACET963R. ACET4950 punch tool added.

Specification

GENERAL DESCRIPTION

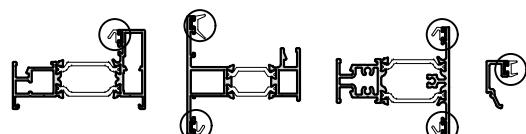
The "Alitherm 400" window system described in this manual is suitable for both replacement windows for existing buildings and for installation into new buildings.

The system incorporates internally & externally beaded vent frames suitable for espag locking.

The low line gaskets and extended polyamide thermal breaks help to provide excellent U Values and Window Energy Rating capable of achieving an 'A' Rating when used in conjunction with the correct double glazed unit.

Alitherm 400 has the option of Quick-Glaze beads with integrated gasket, providing a fast and efficient glazing process. Non integrated gasket options are also available.

Profiles with a 'G' suffix are supplied with integrated gasket.



PROFILE SPECIFICATION

The window frames are constructed of aluminium alloy extrusion to BS EN 755-9 and BS EN 12020, extruded to 6063 T6 alloy. The internal and external extrusions are separated with a polyamide thermal break.

The external aluminium alloy extrusion is pre-treated and finished either:-

- a) Anodised to BS 3987: 1987, grade AA25 to a natural self colour.
- b) Polyester powder organic coating to BS 6496. Dual colour is available.

GENERAL MANUFACTURING

Outer and vent frames are made by cutting the frame profiles with accurate 45° mitred ends using Tungsten Carbide Tipped Saw Blades, operating at approximately 3000 rpm.

The corners are joined using the Alitherm 400 crimping tools to form a cold forged corner joint (made by deforming small slugs of metal into the groove of the corner cleat).

The ends of transoms and mullions are profiled to fit the frame and fixed using self-tapping screws with a silicone seal.

On polyester powder coated finishes, great care should be taken to avoid getting gap sealer on visible surfaces and should be removed as soon as possible with a clean cloth.

Care should be exercised when using products not supplied by Smart Systems Ltd as no responsibility can be accepted.

Specification

WINDOW DRAINAGE

As with all dry glazed systems, it is recommended that the window system is adequately drained and ventilated. Refer to drainage details in manual, if in doubt ask The Technical Department.

In order to get maximum performance and weather resistance it is recommended that drips are used over all vents.

OUTER FRAME MANUFACTURING INFORMATION

The outer frame members are cut with 45° mitred ends to the overall size required, measured to the longest point of the metal.

Prior to corner crimping the centre line position of any transoms or mullions should be marked on the outer frame members. Where the transom/mullion runs right through, it should be marked out on both jambs or head and sill members in pairs to ensure accurate alignment of the sections.

Using the marked centre line, Drill the transom/mullion fixing holes using a 5mm dia. drill bit.

Corners are formed by coating the cut faces to be joined with a suitable small gap sealer. Into the mitred corner insert the cleat glue and the required corner cleats and, where required, the aluminium corner chevrons. The two mitred ends are then brought together and crimped. The small gap sealer ensures a permanent joint and guards against the ingress of moisture and joint movement. After crimping the corner joint, special care should be taken to ensure any excess sealer is removed from painted surfaces.

Transoms or mullions are cut with square ends to the sizes calculated on the cutting formula sheets. The ends are then profiled to allow them to fit into the outer frame. Special tooling is available on request to profile the end of transom/mullion.

Prior to fixing of transoms and mullions smear the cut ends with a suitable gap sealer. After fixing, special care should be taken to ensure any excess is cleared from painted surfaces.

PROFILES WITH INTEGRATED GASKET

When cutting profiles with integrated gaskets, it is crucial to use sharp, well-maintained saw blades to ensure clean cuts.

For optimal mitre cuts, position the profiles so the gasket channels face the saw blades. However, we recommend testing different profile orientations on your saw to determine the best cutting method.

Transoms and mullions with integrated gaskets can be end milled as standard.

Specification

MULTI-POINT LOCKING

The vent should be prepped for the locking mechanism prior to fabrication and fitted into vent before hanging. Stainless steel fixings shall be used for securing the locking mechanism and keeps in position.

GLAZING

All beads are cut to suit the glazing aperture on the fully assembled window for glazing either at factory or on site as required.

EXTERNALLY BEADED GLAZING

Glazing beads are fitted to openings by cutting the horizontal beads square to head and cill of each vent and fixed light area. Vertical beads are cut squared at both ends. Insert bottom beads and two setting blocks to ensure glass will be centralized in vertical dimension of opening (glazing blocks must be full width of cavity to fully support glass or sealed unit), then insert top bead followed by side beads. Finish glazing by insertion of internal gaskets all round.

INTERNALLY BEADED GLAZING

Glazing beads are fitted to openings by cutting the horizontal beads square to head and cill of each vent and fixed light area. Vertical beads are cut square at both ends. Insert bottom beads and two setting blocks to ensure glass will be centralized in vertical dimension of opening (glazing blocks must be full width of cavity to fully support glass or sealed unit), then insert top bead followed by side beads. Finish glazing by insertion of internal gaskets all round.

When glazing with the Quick-Glaze bead, using a glass adjuster is strongly advised to adjust the glazing accordingly with ease.

Specification

Kitemark™ Certificate
No. KM 81580
**Size Limitations and Performance Characteristics
Alitherm 400 Aluminium Alloy Window System**

Window Type	Width (mm) - Maximum	Height (mm) - Maximum	Weight (kg) - Maximum	Area (M ²) - Maximum	Friction Stays (up to and including)	Transom/Mullion Length (mm) inc frame - Maximum	Air Permeability classification	Water tightness classification	Resistance to Wind classification	Exposure category as given in Table 1 of BS 6375-1:2009
Sash dimensions for windows with approved sash profiles:										
Projecting top hung Internally beaded	1400	1400	40	-	24"	-	4	7A	AE2400	2000+
Projecting top hung Externally beaded	1400	1400	40	-	24"	-	4	5A	AE2400	2000+
Projecting side hung Internally beaded	600	1400	28	-	16"	-	4	7A	AE2400	2000+
Projecting side hung Externally beaded	600	1400	28	-	16"	-	4	5A	AE2400	2000+
Overall dimensions for windows with approved outer frame profiles:										
Fixed Internally Beaded	2100	2100	-	4.2	-	-	4	7A	AE2400	2000+
Fixed Externally Beaded	2100	2100	-	4.2	-	-	4	5A	AE2400	2000+
Overall dimensions for approved outer frames & transom/mullion profiles:										
Multilights* Internally Beaded	2100	2100	-	2.5	-	1200	4	7A	AE2400	2000+
Multilights* Externally Beaded	2100	2100	-	2.5	-	1200	4	5A	AE2400	2000+

*Transom/mullion subject to
lxx/lyy requirements

Please see pages B25 & B26 for more
guidance on vent sizes & limitations.

- Side Hung Weight Limit Can Be Increased To 40 kg Using Egress Hinges
- See hardware for minimum and maximum sizes

Number	Picture	Page	Perim. mm	Mec. mm	Ix(cm ⁴) wx(cm ³)	Iy(cm ⁴) wy(cm ³)	Length	Pack pr.	MF	SA	KL	HP	M
ETC4101 ETC4101G		A17	426	122	31.86 --- 8.3	9.21 --- 3.3	6.5	1	✓	✓	✓	✓	✓
ETC4105 ETC4105G		A19	333	82	23.88 --- 6.0	3.83 --- 2.16	6.5	1	✓	✓	✓	✓	✓
ETC4110 ETC4110G		A15	295	82	23.98 --- 6.16	4.12 --- 2.23	6.5	1	✓	✓	✓	✓	✓
ETC4111 ETC4111G		A15	346	97	26.73 --- 6.91	5.28 --- 2.14	6.5	1	✓	✓	✓	✓	✓
ETC4112 ETC4112G		A16	297	78	21.54 --- 6.47	2.74 --- 1.64	6.5	1	✓	✓	✓	✓	✓
ETC4113		A16	371	101	27.56 --- 7.8	5.91 --- 2.18	6.5	1	✓	✓	✓	✓	✓
ETC4114		A17	369	101	30.35 --- 8.22	7.60 --- 2.93	6.5	1	✓	✓	✓	✓	✓
ETC4115 ETC4115G		A18	297	78	21.50 --- 5.69	2.75 --- 1.68	6.5	1	✓	✓	✓	✓	✓
ETC4116 ETC4116G		A18	351	96	26.38 --- 6.61	4.39 --- 1.93	6.5	1	✓	✓	✓	✓	✓

A = Outside
B = Inside

MF = Mill Finish
SA = Silver Anodised
KL = Basic Colour
HP = Special Colour
M = Dual Colour

Number	Picture	Page	Perim. mm	Mec. mm	Ix(cm ⁴) wx(cm ³)	Iy(cm ⁴) wy(cm ³)	Length	Pack pr.	MF	SA	KL	HP	M
ETC4117		A20	391	76	26.4 --- 7.14	11.73 --- 3.90	6.5	1	✓	✓	✓	✓	✓
ETC4120 ETC4120G		A20	297	87	18.24 --- 6.10	4.63 --- 1.95	6.5	1	✓	✓	✓	✓	✓
ETC4124 ETC4124G		A21	346	72	14.37 --- 3.88	2.75 --- 1.13	6.5	1	✓	✓	✓	✓	✓
ETC4125 ETC4125G		A22	344	79	13.93 --- 3.77	2.84 --- 1.18	6.5	1	✓	✓	✓	✓	✓
ETC4129 ETC4129G		A23	335	99	19.34 --- 5.51	5.91 --- 1.95	6.5	1	✓	✓	✓	✓	✓
ETC4130 ETC4130G		A24	312	89	19.39 --- 5.84	4.66 --- 1.63	6.5	1	✓	✓	✓	✓	✓
ETC4131		A42	427	213	93.65 --- 16.15	43.02 --- 16.42	6.5	1	✓	✓	✓	✓	✓
ETC4132		A21	381	89	19.8 --- 5.88	4.53 --- 1.59	6.5	1	✓	✓	✓	✓	✓
ETC4133		A22	371	89	16.27 --- 5.1	4.6 --- 1.61	6.5	1	✓	✓	✓	✓	✓



A = Outside
B = Inside

MF = Mill Finish
SA = Silver Anodised
KL = Basic Colour
HP = Special Colour
M = Dual Colour

Number	Picture	Page	Perim. mm	Mec. mm	Ix(cm ⁴) wx(cm ³)	Iy(cm ⁴) wy(cm ³)	Length	Pack pr.	MF	SA	KL	HP	M
ETC4134 ETC4134G		B A19	453	117	29.83 --- 7.07	10.05 --- 3.25	6.5	1	✓	✓	✓	✓	✓
ETC4135 ETC4135G		B A25	337	111	23.74 --- 6.30	6.51 --- 2.11	6.5	1	✓	✓	✓	✓	✓
ETC4136		B A24	421	201	95.03 --- 15.97	9.13 --- 3.21	6.5	1	✓	✓	✓	✓	✓
ETC4137 ETC4137G		B A25	410	113	23.74 --- 6.30	6.51 --- 2.11	6.5	1	✓	✓	✓	✓	✓
ETC4138		B A26	306	83	20.06 --- 5.62	7.04 --- 2.88	6.5	1	✓	✓	✓	✓	✓
ETC4139		B A26	340	84	19.48 --- 5.40	6.55 --- 2.54	6.5	1	✓	✓	✓	✓	✓
ETC4146		B A27	248	74	12.60 --- 3.50	2.64 --- 1.35	6.5	1	✓	✓	✓	✓	✓
ETC4147		B A27	256	65	13.69 --- 3.89	2.00 --- 1.22	6.5	1	✓	✓	✓	✓	✓
ETC4179 ETC4179G		A29	104	29	- --- -	- --- -	6.5	1	✓	✓	✓	✓	

 A = Outside
 B = Inside

 MF = Mill Finish
 SA = Silver Anodised
 KL = Basic Colour
 HP = Special Colour
 M = Dual Colour

Number	Picture	Page	Perim. mm	Mec. mm	Ix(cm ⁴) wx(cm ³)	Iy(cm ⁴) wy(cm ³)	Length	Pack pr.	MF	SA	KL	HP	M
ETC080	A  B	A35	334	61	25.58 --- 5.47	4.88 --- 2.57	6.5	1	✓	✓	✓	✓	✓
ETC081	A  B	A35	197	35	13.85 --- 3.8	0.36 --- 0.52	6.5	1	✓	✓	✓	✓	✓
ETC082	A  B	A35	221	47	16.21 --- 4.19	1.15 --- 1.29	6.5	1	✓	✓	✓	✓	✓
ETC083	A  B	A35	243	58	17.66 --- 4.32	2.64 --- 2.36	6.5	1	✓	✓	✓	✓	✓
ETC357	A  B	A36	297	138	41.5 --- 9.86	52 --- 2.67	6.5	1	✓	✓	✓	✓	✓
ETC451	A  B	A37	304	109	32.44 --- 7.29	3.46 --- 2.79	6.5	1	✓	✓	✓	✓	✓
ETC452	A  B	A37	414	197	122.46 --- 18.03	6.01 --- 3.34	6.5	1	✓	✓	✓	✓	✓
ETC457	A  B	A37	444	212	164.27 --- 21.60	6.79 --- 3.73	6.5	1	✓	✓	✓	✓	✓
ETC458	A  B	A38	524	252	313.62 --- 32.63	8.87 --- 4.79	6.5	1	✓	✓	✓	✓	✓










A = Outside
B = Inside

MF = Mill Finish
SA = Silver Anodised
KL = Basic Colour
HP = Special Colour
M = Dual Colour

Number	Picture	Page	Perim. mm	Mec. mm	Ix(cm ⁴) wx(cm ³)	Iy(cm ⁴) wy(cm ³)	Length	Pack pr.	MF	SA	KL	HP	M
ETC477		A39	752	408	1591.6 --- 105.33	26.84 --- 12.84	6.5	1	✓	✓	✓	✓	✓
ETC479N		A38	594	287	501.64 --- 44.04	9.72 --- 5.34	6.5	1	✓	✓	✓	✓	✓
ETC869		A31	332	144	18.38 --- 6.13	14.3 --- 5.17	6.5	1	✓	✓	✓	✓	✓
PCX55		A32	207	-	- --- -	- --- -	3	1	✓				
UN3000		A36	251	41	15.8 --- 4.51	0.79 --- 0.84	6.5	1	✓	✓	✓	✓	✓
UN3010		A34	369	226	41.4 --- 10.7	40.0 --- 11.6	6.5	1	✓	✓	✓	✓	✓
UN3011		A34	288	130.3	22.3 --- 5	12.2 --- 4.1	6.5	1	✓	✓	✓	✓	✓
UN3012		A31	238	76	1.53 --- 0.79	17.24 --- 5.09	6.5	1	✓	✓	✓	✓	✓
UN3015		A36	214.5	56	18.1 --- 5.2	1 --- 1	6.5	1	✓	✓	✓	✓	✓

A = Outside
B = Inside

MF = Mill Finish
SA = Silver Anodised
KL = Basic Colour
HP = Special Colour
M = Dual Colour

Number	Picture	Page	Perim. mm	Mec. mm	Ix(cm ⁴) wx(cm ³)	Iy(cm ⁴) wy(cm ³)	Length	Pack pr.	MF	SA	KL	HP	M
UN3020		A40	281.6	70.4	14.8 --- 4.2	0.9 --- 1	6.5	1	✓	✓	✓	✓	
UN3042		A40	288	111	31.2 --- 8.9	9.5 --- 4.3	6.5	1	✓	✓	✓	✓	
UN3080		A32	-	-	4.69 --- 4.69	2.47 --- 2.47	6.5	1	✓				
UN3081		A32	189	68	- --- -	- --- -	6.5	1	✓	✓	✓	✓	
UN3082		A33	379	151	- --- -	- --- -	6.5	1	✓	✓	✓	✓	
UN3083		A33	235	12	- --- -	- --- -	6.5	1	✓	✓	✓	✓	
UN3160 UN3160G		A28	120	39	- --- -	- --- -	6.5	1	✓	✓	✓	✓	
UN3162N UN3162G		A28	128	41	- --- -	- --- -	6.5	1	✓	✓	✓	✓	
UN3164 UN3164G		A29	112	33	- --- -	- --- -	6.5	1	✓	✓	✓	✓	

A = Outside
B = Inside

MF = Mill Finish
SA = Silver Anodised
KL = Basic Colour
HP = Special Colour
M = Dual Colour

PROFILES : TECHNICAL INFORMATION

A = Outside
B = Inside

MF	= Mill Finish
SA	= Silver Anodised
KL	= Basic Colour
HP	= Special Colour
M	= Dual Colour



PROFILES : TECHNICAL INFORMATION

A = Outside
B = Inside

MF	= Mill Finish
SA	= Silver Anodised
KL	= Basic Colour
HP	= Special Colour
M	= Dual Colour

Primary Visible Side

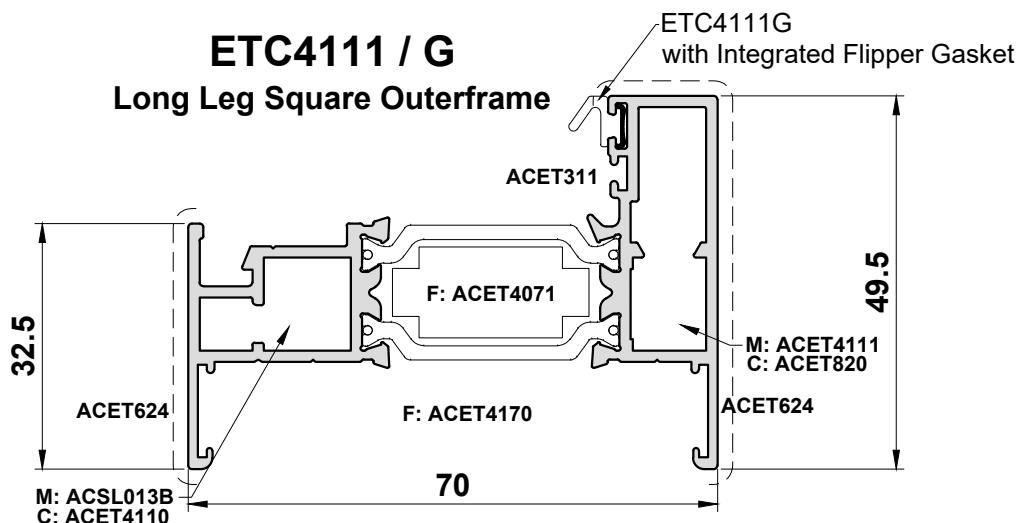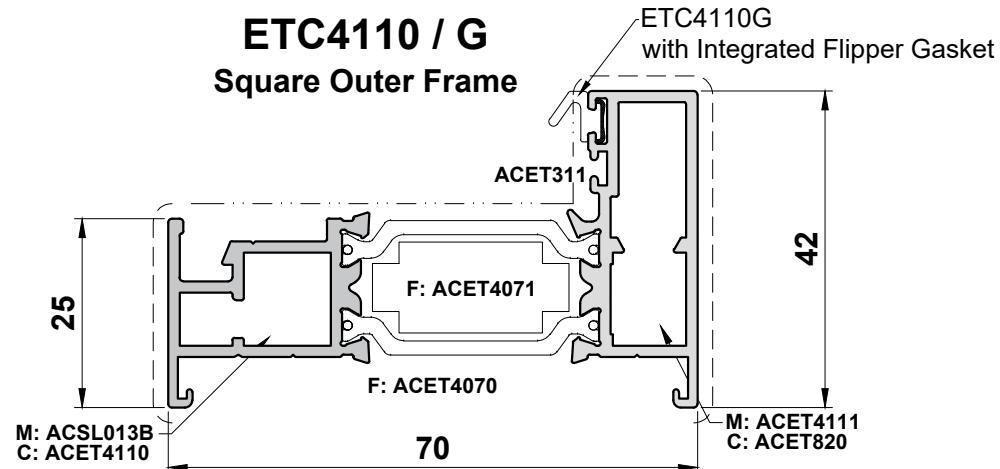
Secondary Visible Side




Scale 1:1

Primary Visible Side

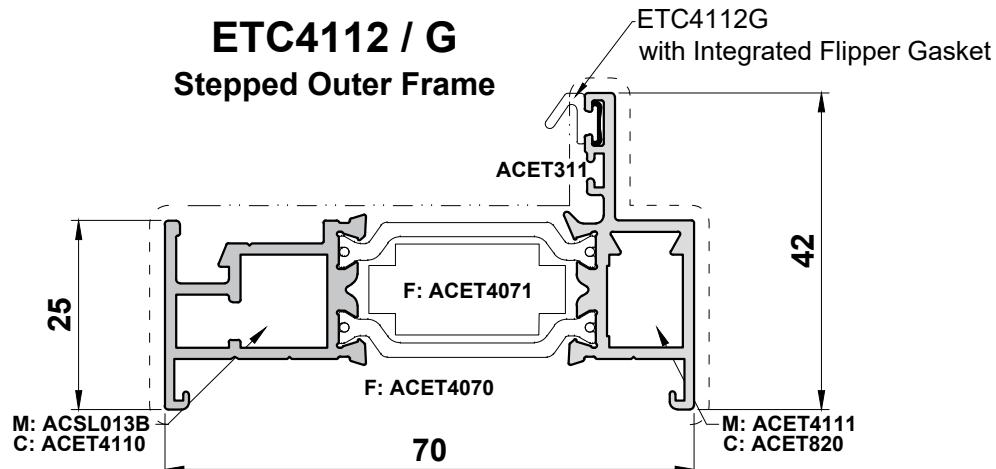Secondary Visible Side





ETC4113
Odd Leg Stepped Outerframe
Crimp Only

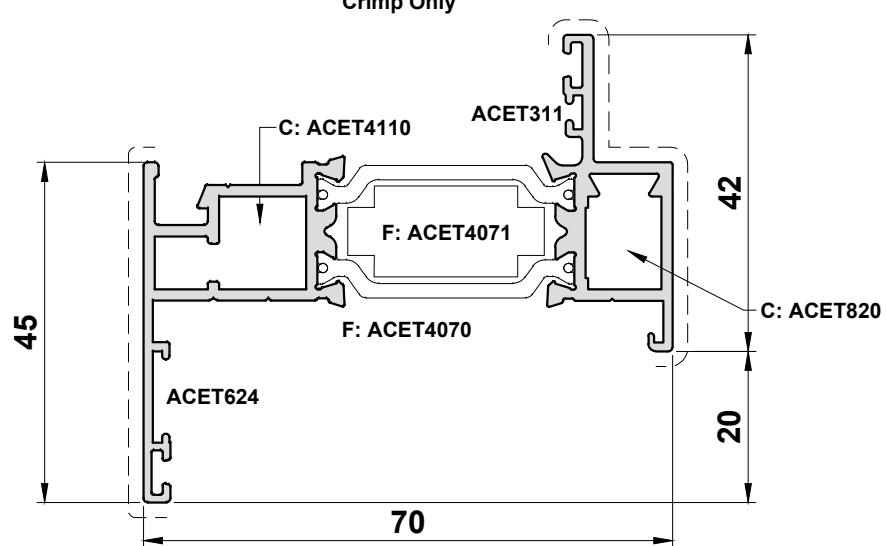

Scale 1:1

Primary Visible Side

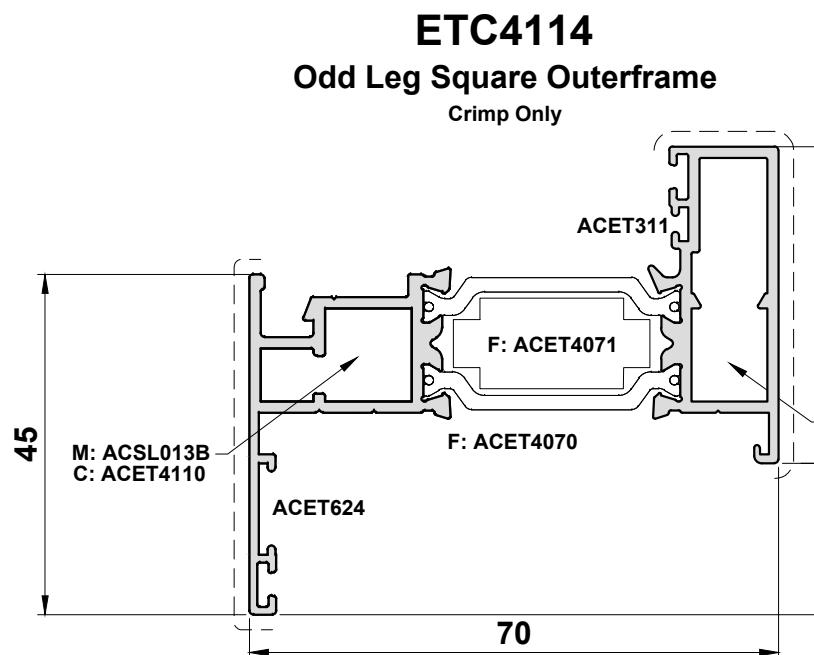
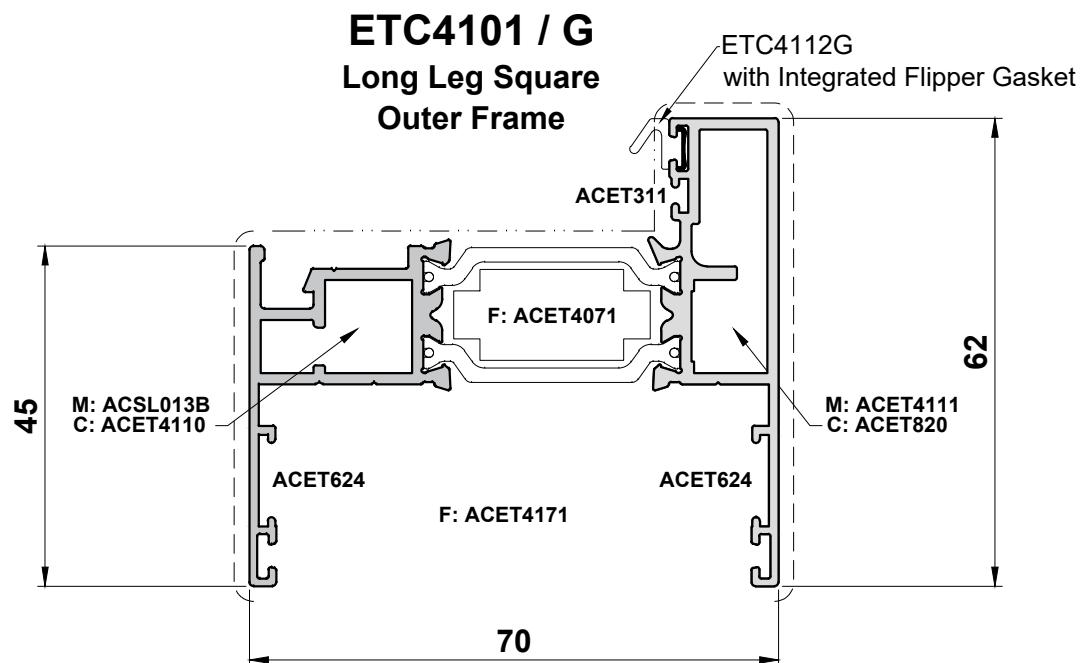
Secondary Visible Side



Scale 1:1

Primary Visible Side

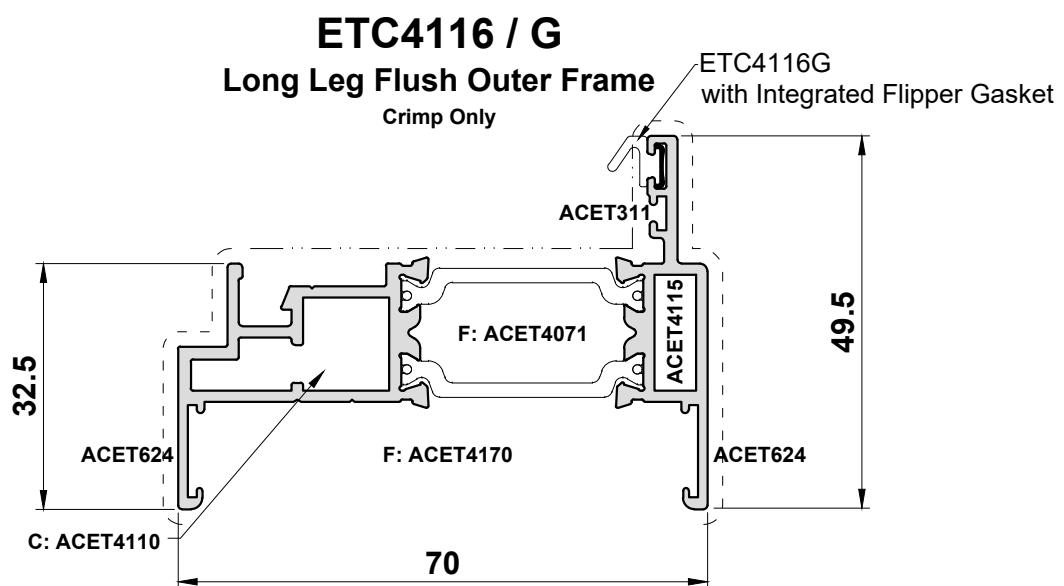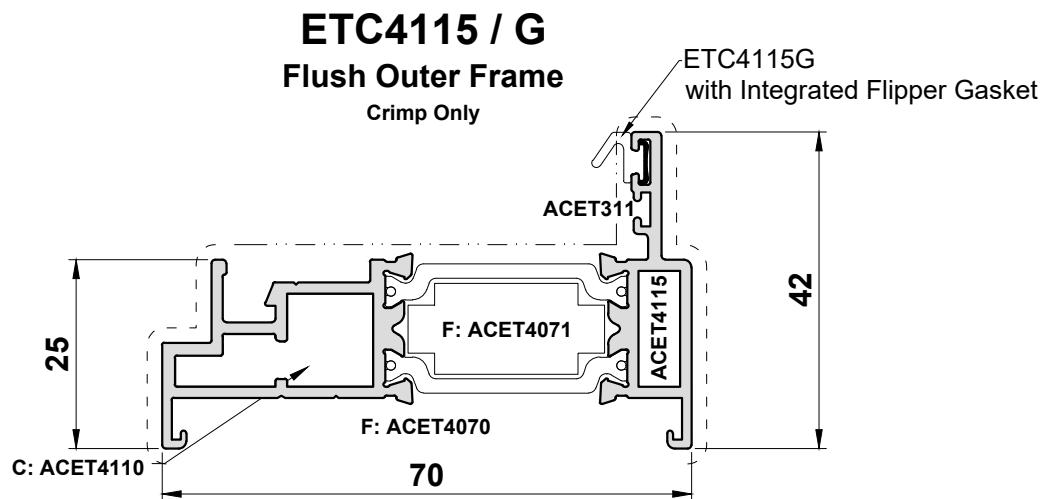
Secondary Visible Side




Scale 1:1

Primary Visible Side

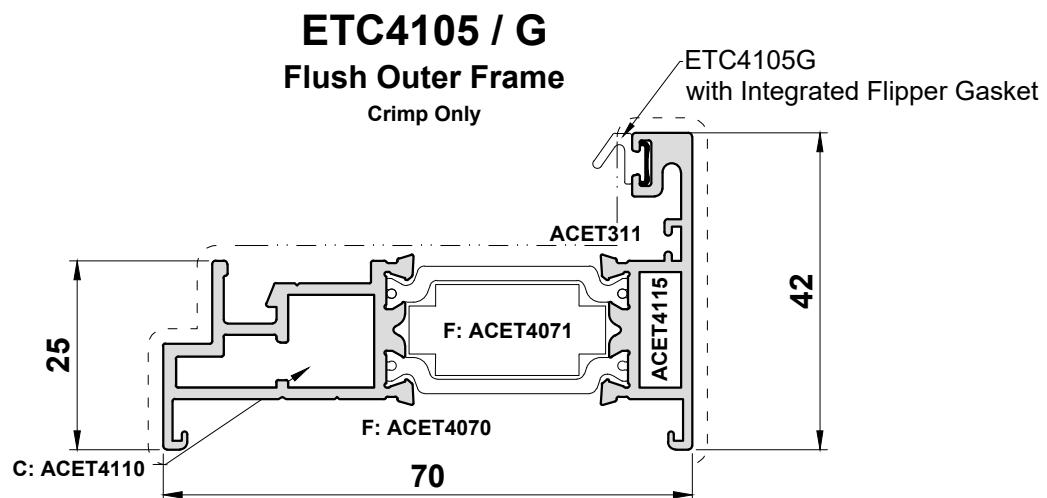Secondary Visible Side



ETC4134 / G
Flush Transom/Mullion

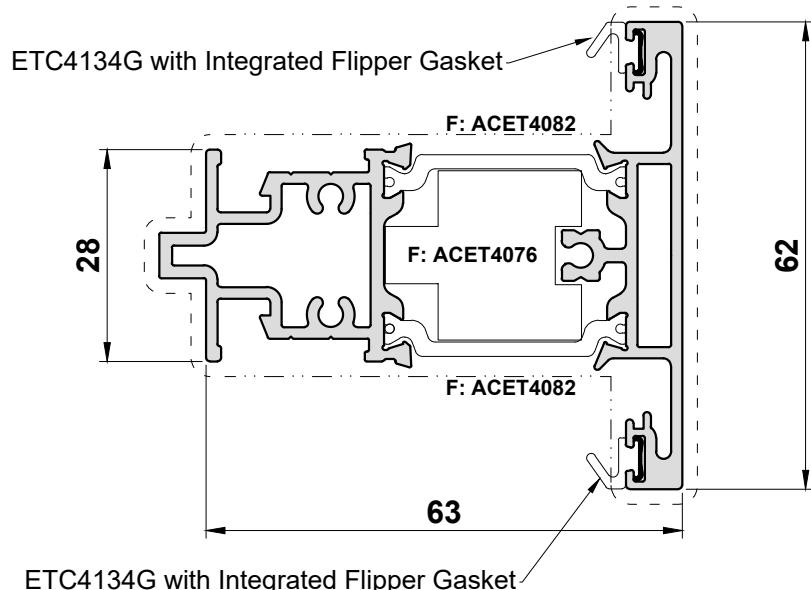

Scale 1:1

Primary Visible Side


Secondary Visible Side

ETC4117

Curtain Wall Adaptor

(For Single Opening Lights Only)

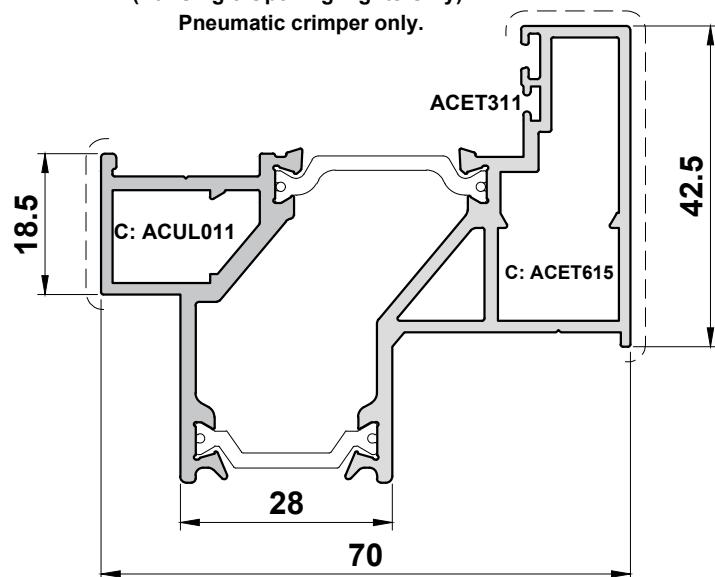
Pneumatic crimper only.



ETC4120 / G

Externally Beaded Sash

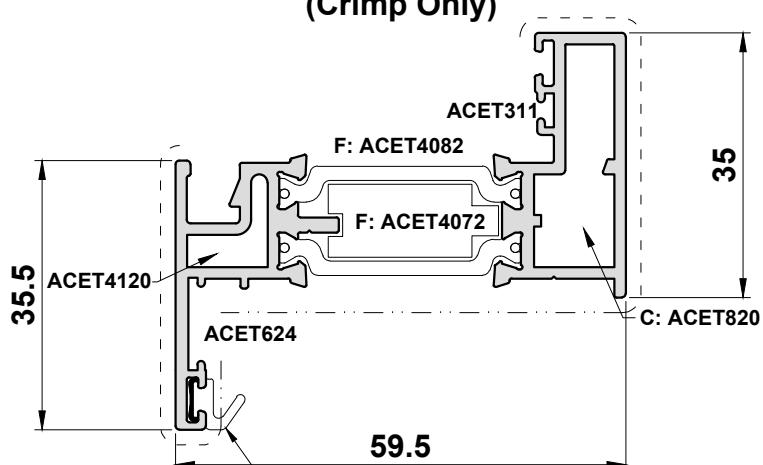(Crimp Only)




ETC4120G with Integrated Flipper Gasket Only

Scale 1:1


Primary Visible Side

Secondary Visible Side

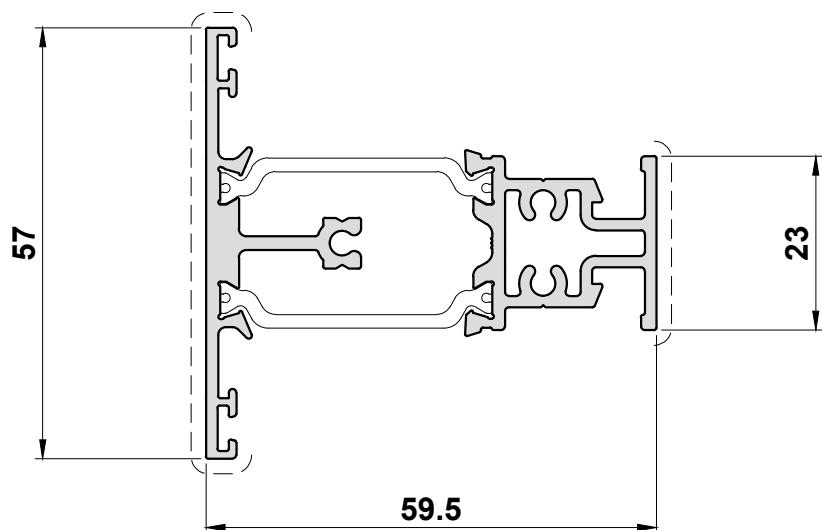ETC4132 / G
ETC4124 Dummy Transom



ETC4124 / G
Slimline Sash

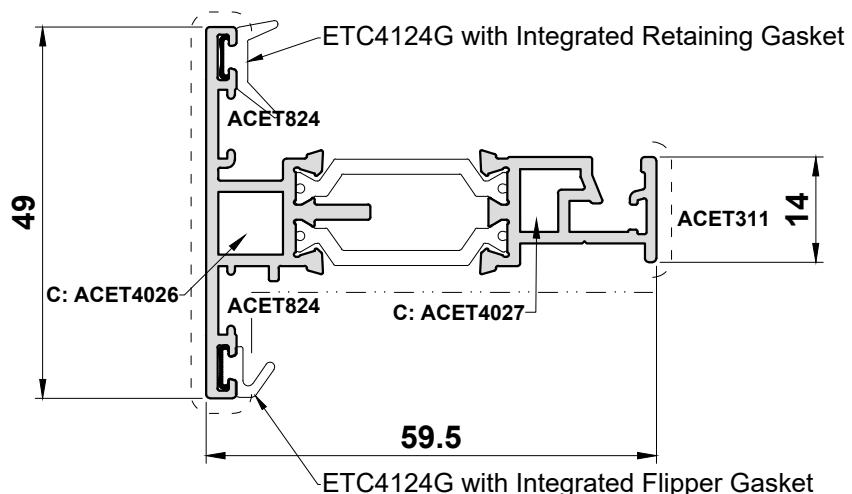


Scale 1:1


Primary Visible Side

Secondary Visible Side

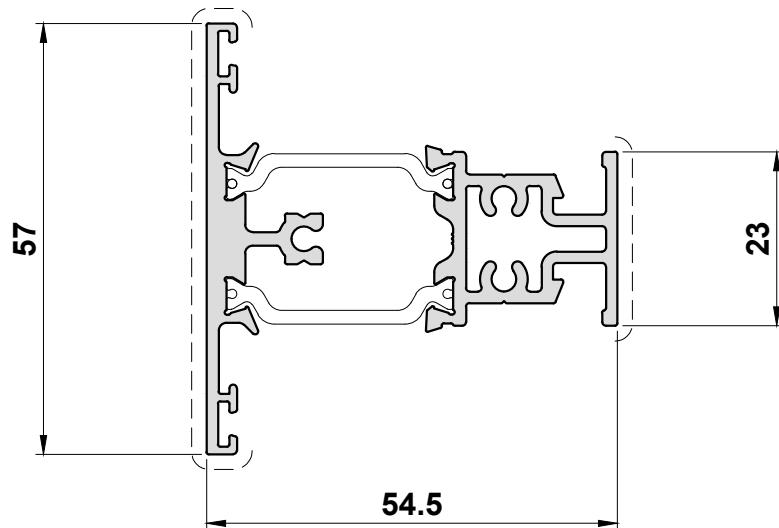ETC4133 / G
ETC4125 Dummy Transom



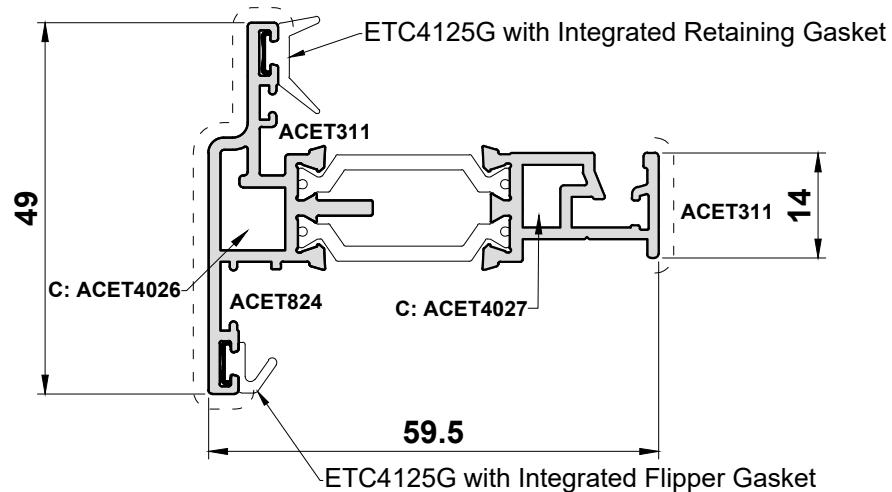ETC4125 / G
Heritage Sash
for 24mm Glazing Only




Scale 1:1

Primary Visible Side

Secondary Visible Side

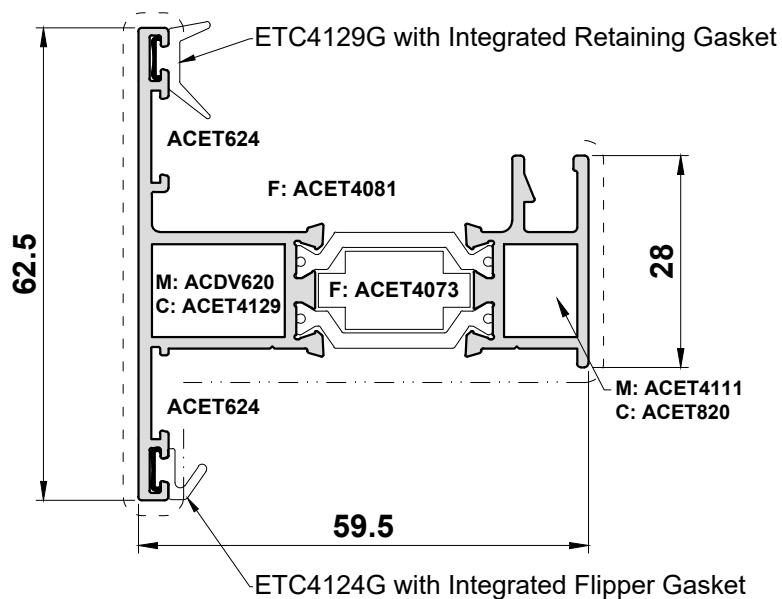ETC4129 / G
Internally Bead Sash




Scale 1:1


Primary Visible Side

Secondary Visible Side

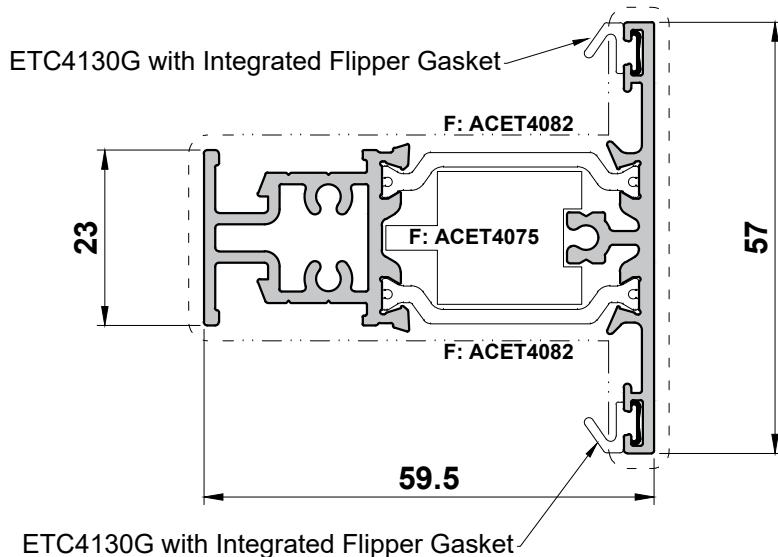ETC4130 / G
Transom/Mullion



ETC4136
Reinforced Transom/Mullion

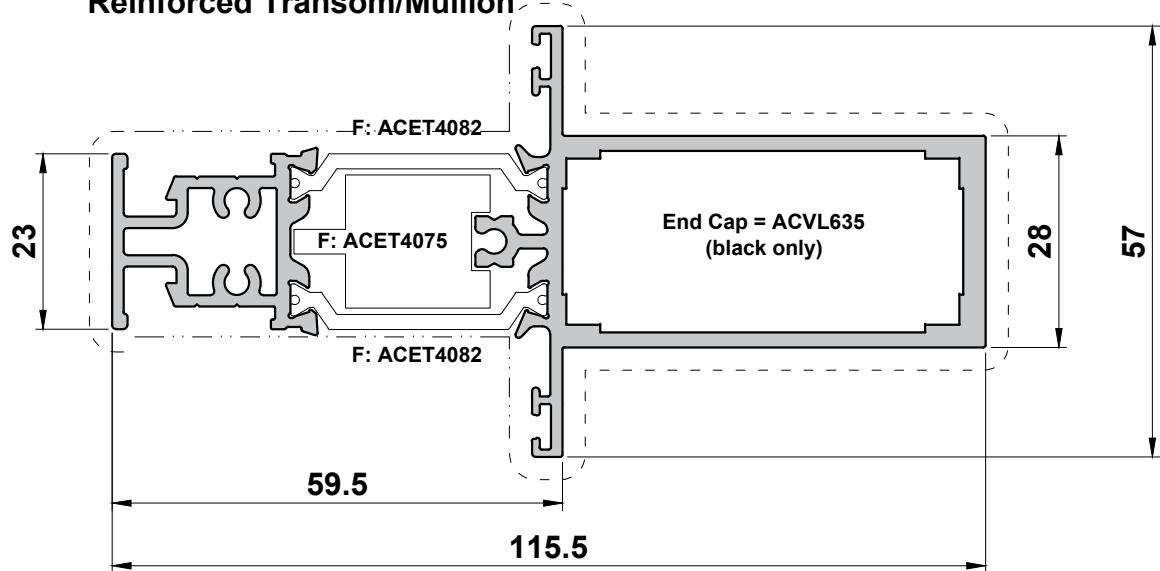


Scale 1:1


Primary Visible Side

Secondary Visible Side

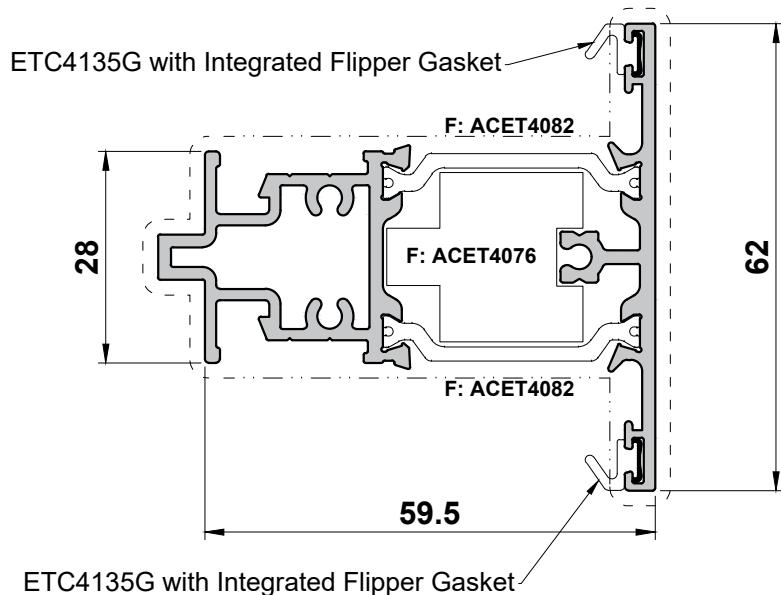ETC4135 / G
Flush Transom/Mullion



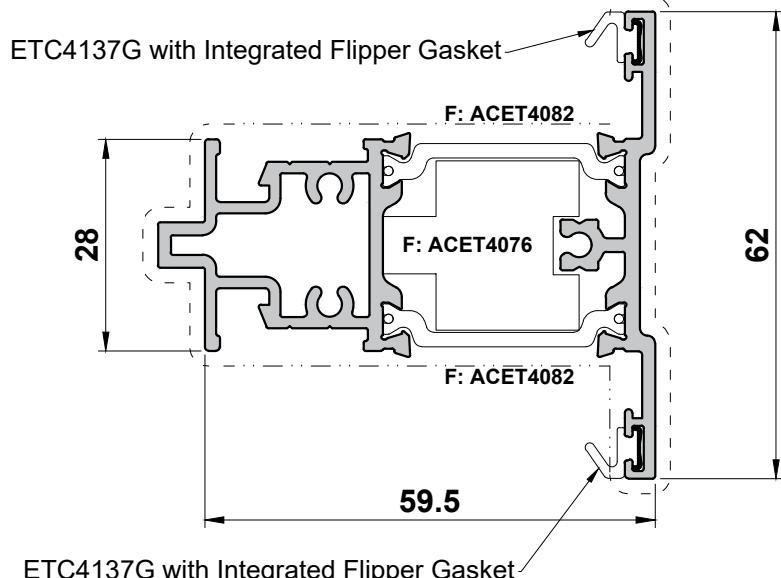ETC4137 / G
Heritage Flush Transom/Mullion




Scale 1:1


Primary Visible Side

Secondary Visible Side

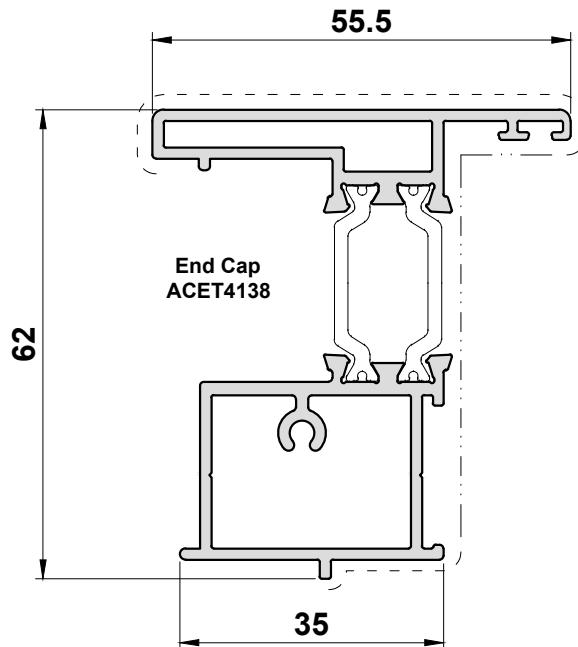ETC4138
French Casement Mullion



ETC4139
French Casement Mullion
for Slimline Sash ETC4124 & ETC4125

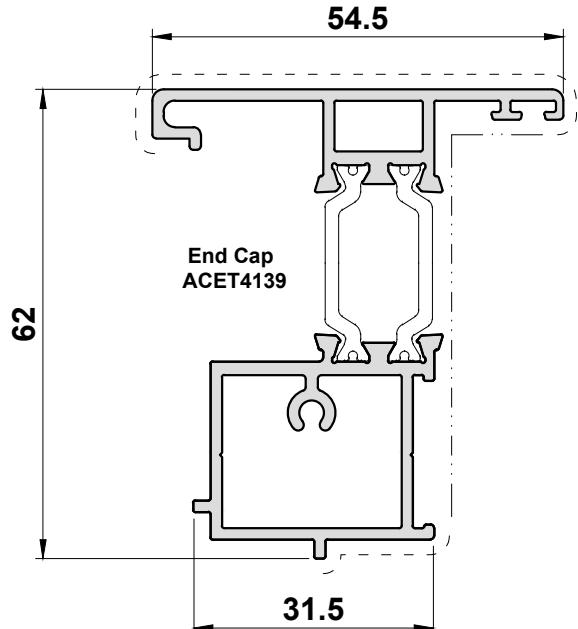


Scale 1:1


Primary Visible Side

Secondary Visible Side

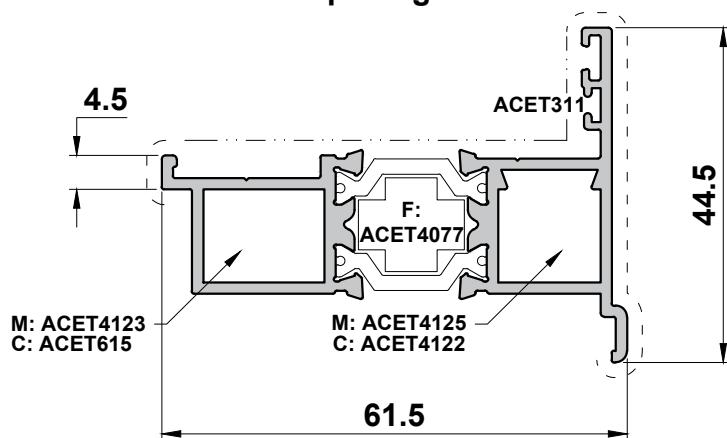ETC4146
Reverse Adaptor
for Opening Sash



ETC4147
Reverse Adaptor
for Fixed Pane
(Crimp Only)

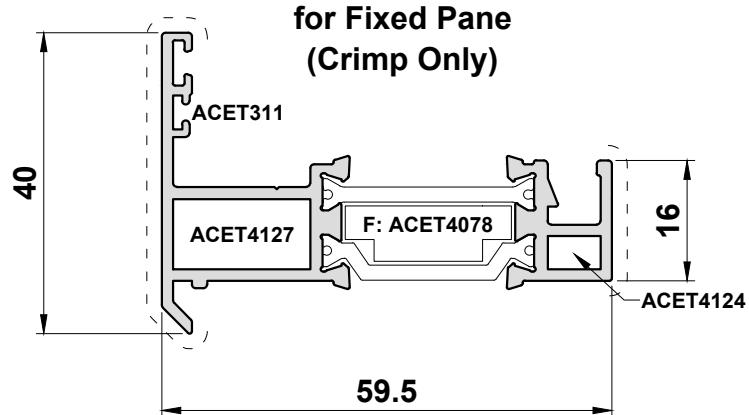


Scale 1:1


Primary Visible Side

Secondary Visible Side

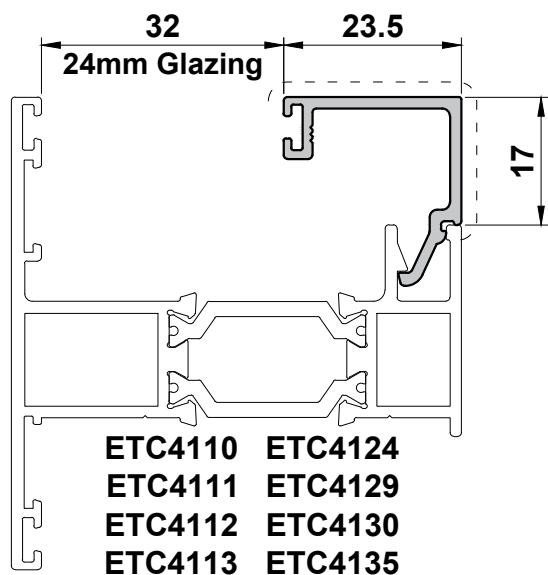
UN3162N
23.5mm Bead




UN3162G
23.5mm Bead
with Gasket

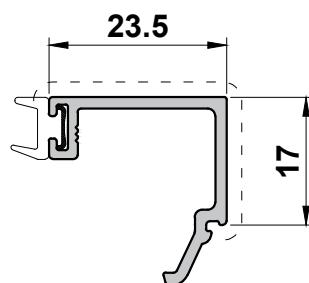

UN3160
19.5mm Bead

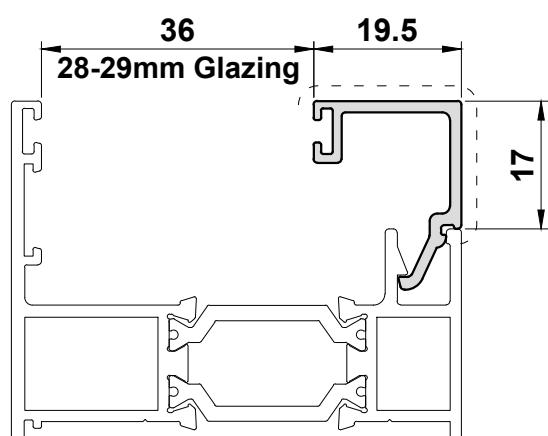

UN3160G
19.5mm Bead
with Gasket

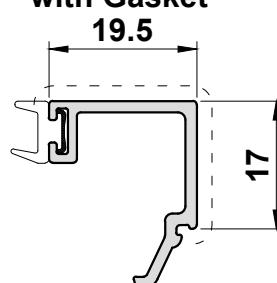

- | | |
|---------|------------------------|
| ETC4110 | ETC4124 |
| ETC4111 | ETC4125 (24mm glazing) |
| ETC4112 | ETC4129 |
| ETC4113 | ETC4130 |
| ETC4115 | ETC4135 |
| ETC4116 | ETC4136 |
| | ETC4147 |

Scale 1:1


See Section E glazing chart for ETC4120 glazing details

Primary Visible Side

Secondary Visible Side

UN3164

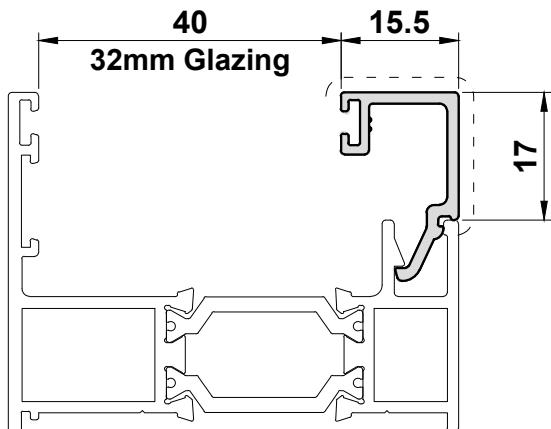15.5mm Bead



ETC4110 ETC4124

ETC4111 ETC4129

ETC4112 ETC4130


ETC4113 ETC4135

ETC4115 ETC4136

ETC4116 ETC4147


UN3164G

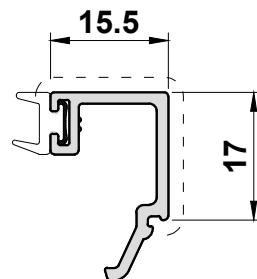15.5mm Bead
with Gasket



ETC4179

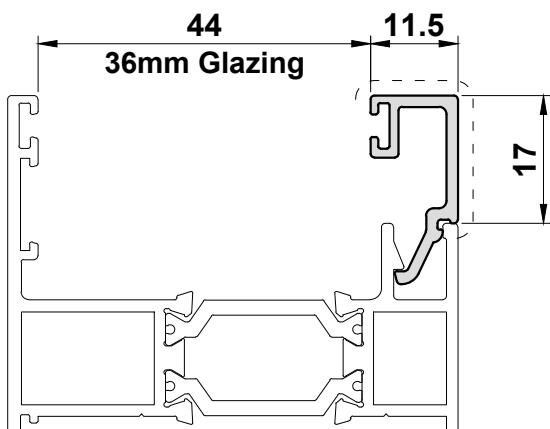11.5mm Bead



ETC4110 ETC4124

ETC4111 ETC4129

ETC4112 ETC4130


ETC4113 ETC4135

ETC4115 ETC4136

ETC4116 ETC4147

ETC4179G

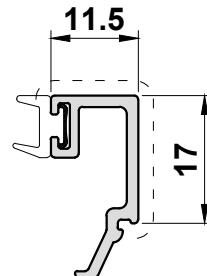11.5mm Bead
with Gasket




See Section E glazing chart for ETC4120 glazing details

Primary Visible Side


Secondary Visible Side

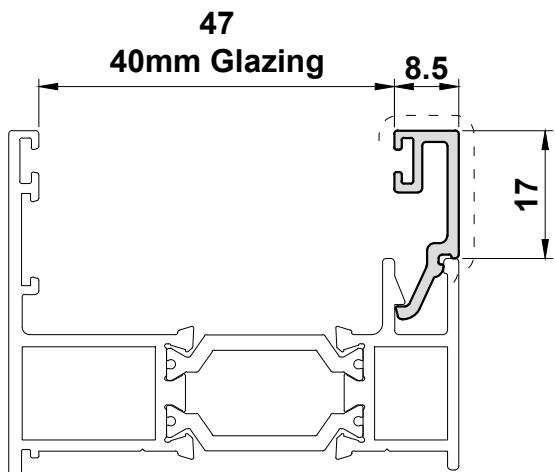UN3166
8.5mm Bead




ETC4110 ETC4124
ETC4111 ETC4129
ETC4112 ETC4130
ETC4113 ETC4135
ETC4115 ETC4136
ETC4116 ETC4147

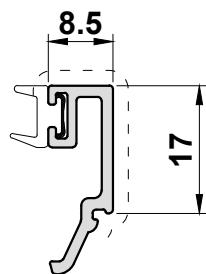UN3166G
8.5mm Bead
with Gasket



UN3168
3.5mm Bead

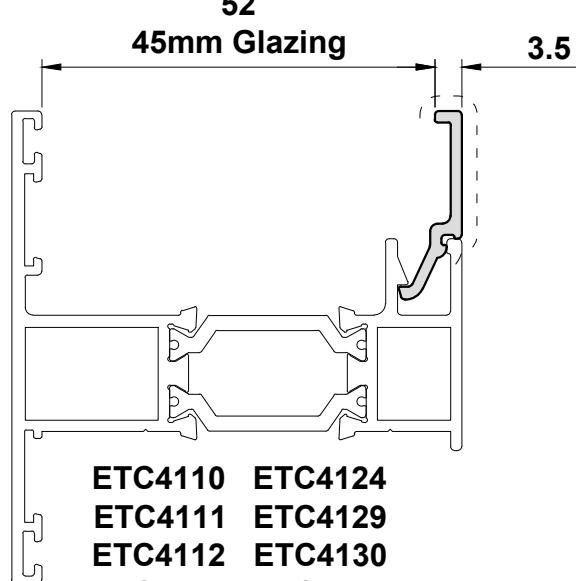

ETC4110 ETC4124
ETC4111 ETC4129
ETC4112 ETC4130
ETC4113 ETC4135
ETC4115 ETC4136
ETC4116 ETC4147


See Section E glazing chart for ETC4120 glazing details

Primary Visible Side



Secondary Visible Side

VL72
Drip / Weather Bar

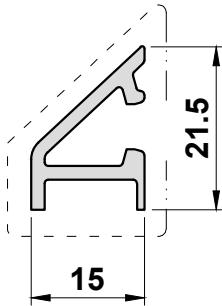End Caps: ACVL059



UN3012
Bay Pole Adaptor

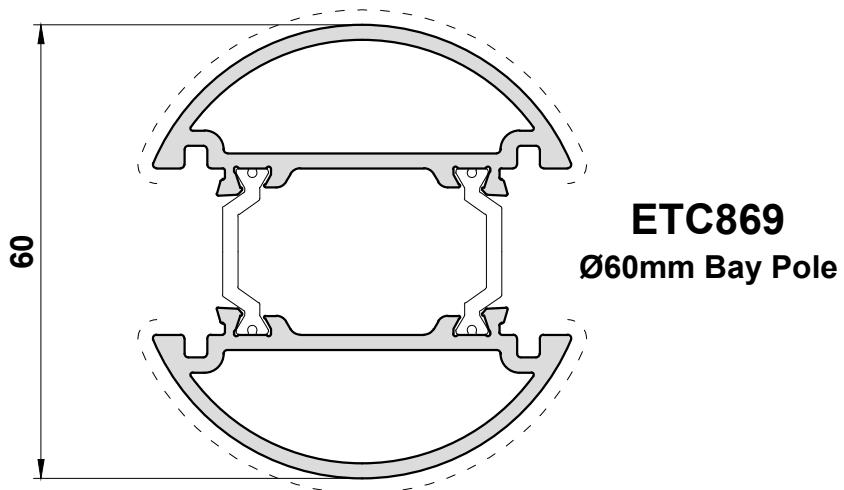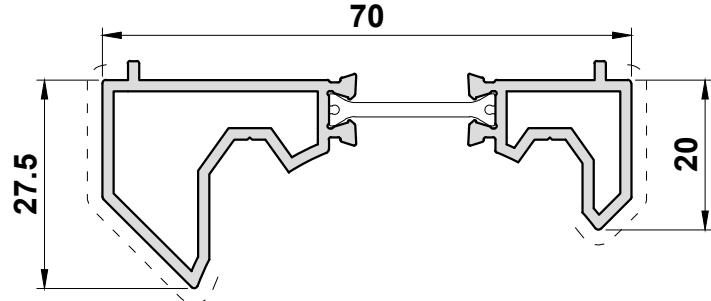


ETC869
Ø60mm Bay Pole

Scale 1:1


Primary Visible Side

Secondary Visible Side


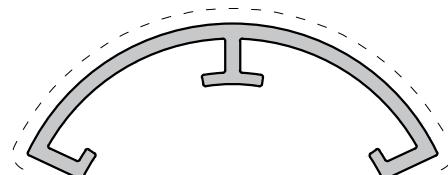
UN3081
Bay Pole Cover



PCX55
Bay Pole Isolator

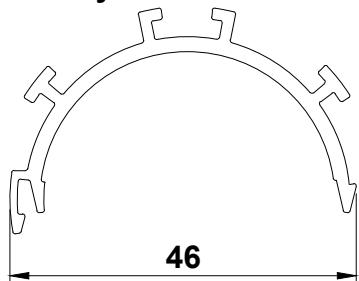

UN3080
Bay Pole

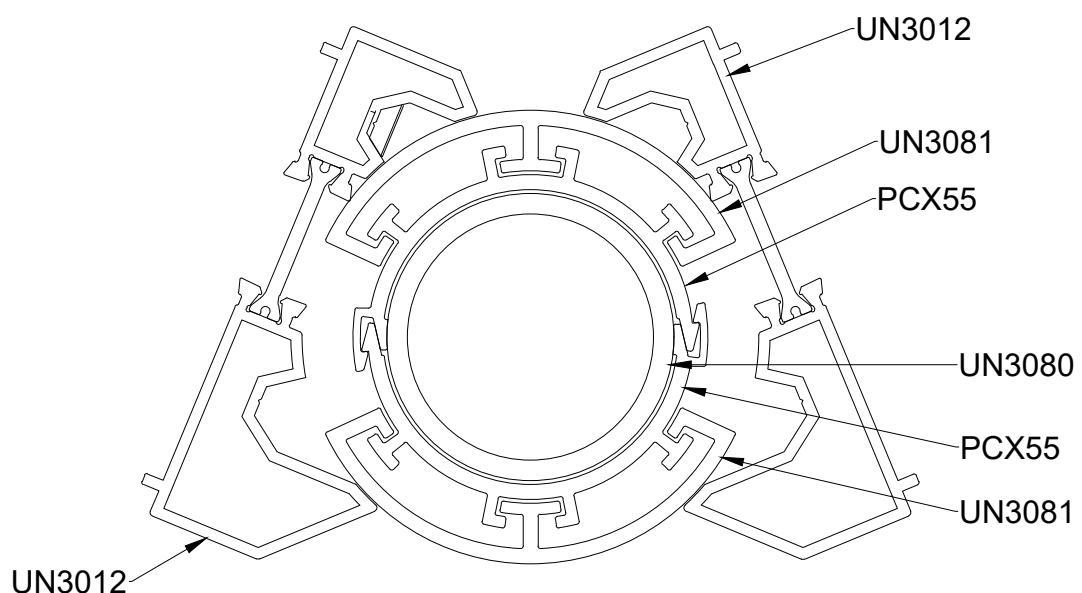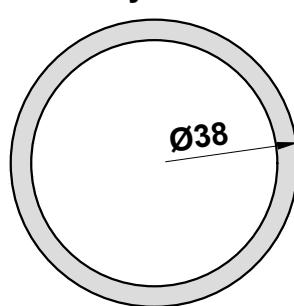


Scale 1:1


Primary Visible Side

Secondary Visible Side

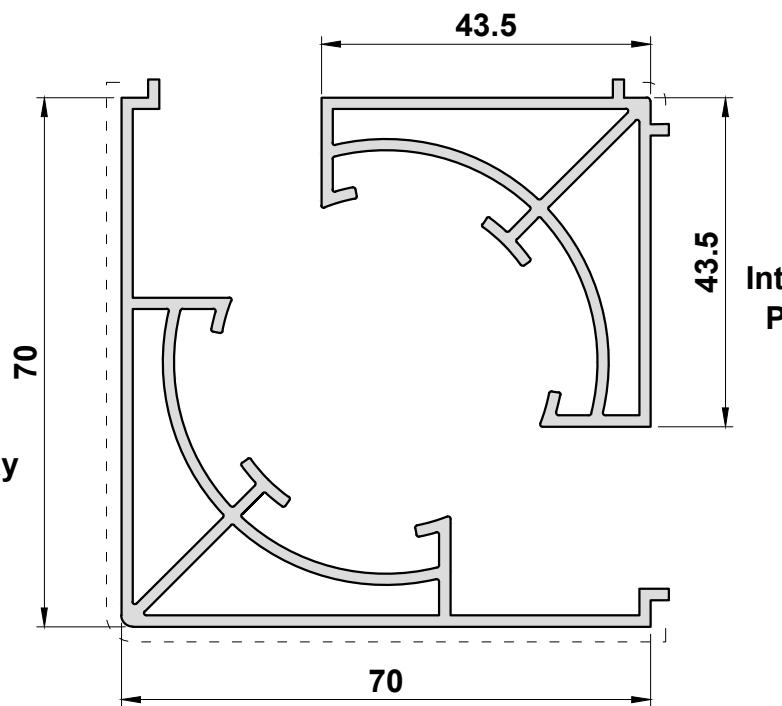UN3082
External 90° Bay
Pole Adaptor



UN3083
Internal 90° Bay
Pole Adaptor

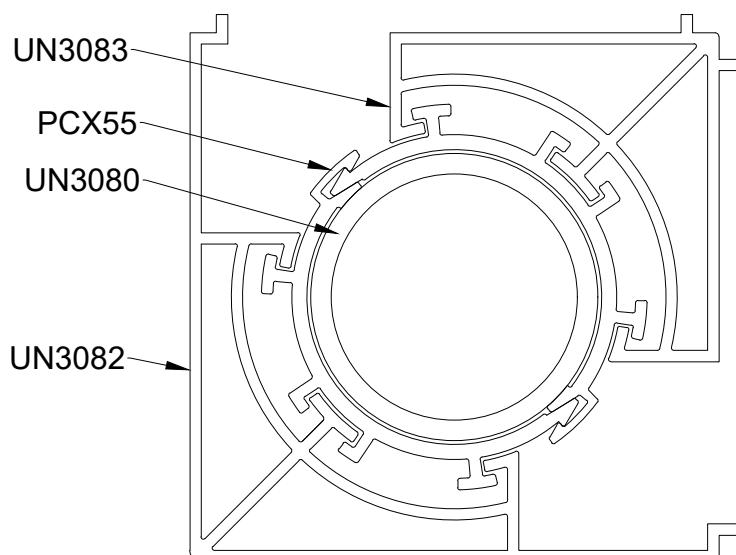


Scale 1:1


Primary Visible Side

Secondary Visible Side

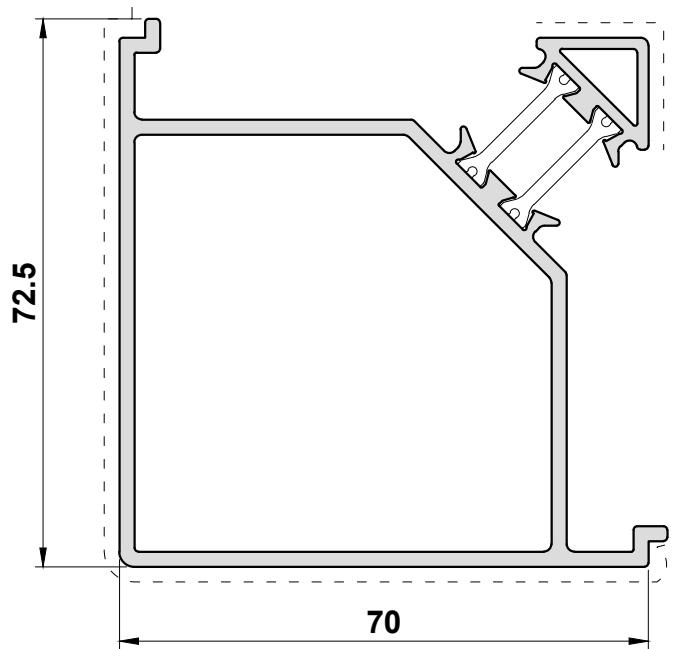UN3010
90° Corner Post



UN3011
135° Bay Pole

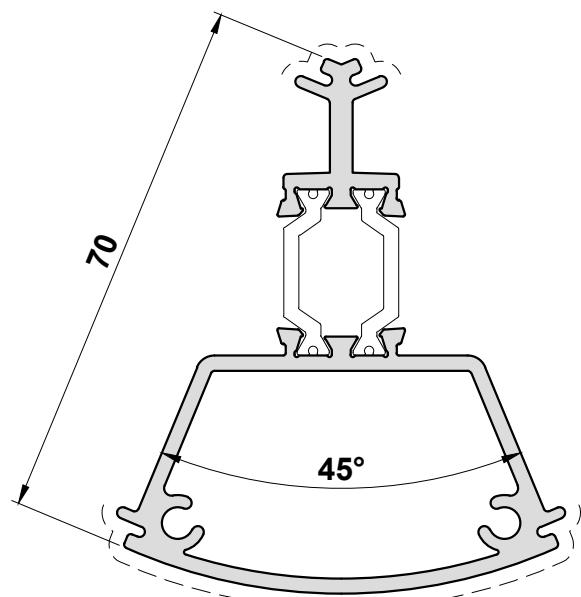


Scale 1:1


Primary Visible Side

Secondary Visible Side

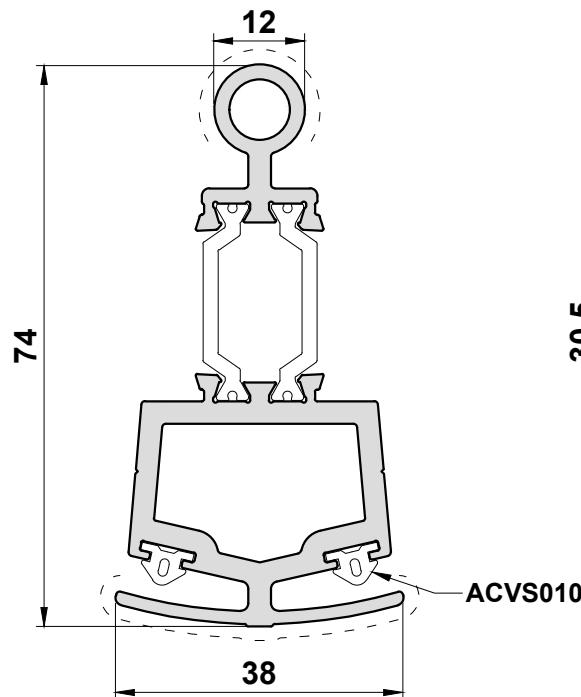
ETC080
Bay Pole




ETC081
169° - 150°
Bay Pole Adaptor

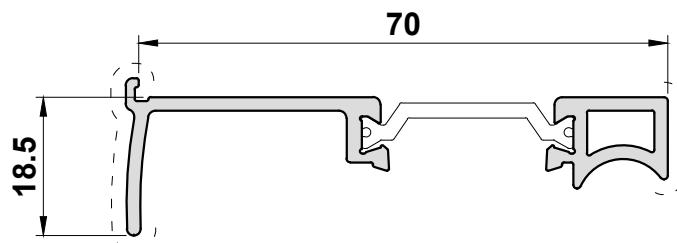

ETC082
149° - 130°
Bay Pole Adaptor

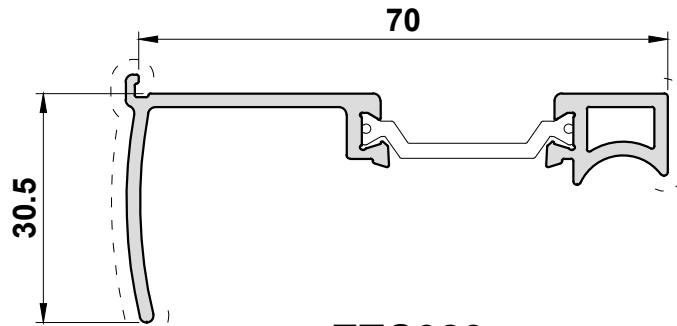

ETC083
129° - 115°
Bay Pole Adaptor

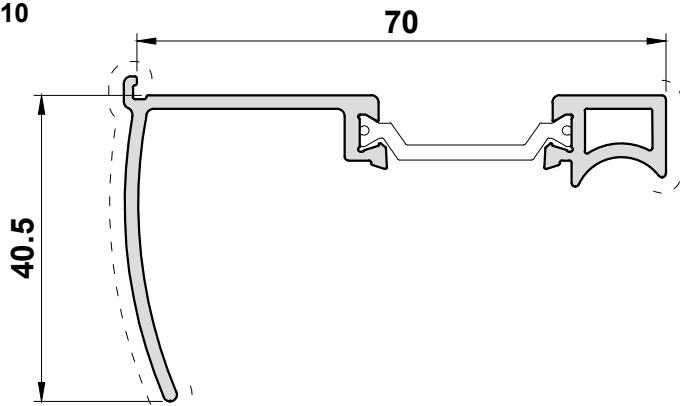


Scale 1:2

Primary Visible Side

Secondary Visible Side


ETC357

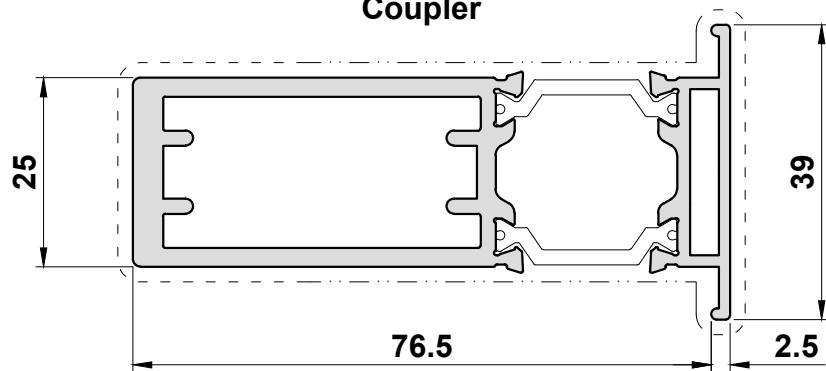Coupler




UN3015

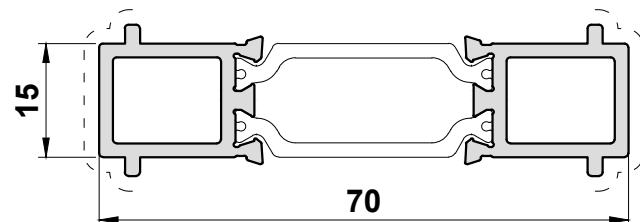70mm x 15mm Coupler



UN3000

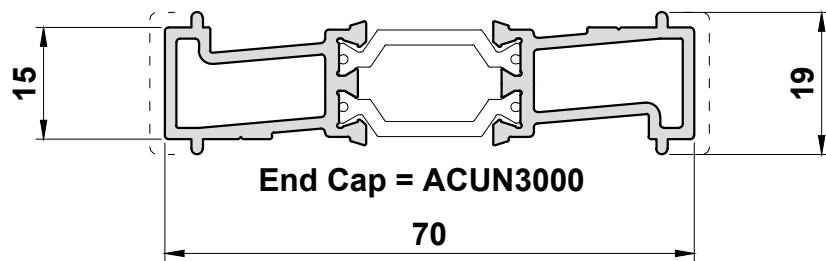Flush Horizontal Coupler




Scale 1:1


Primary Visible Side

Secondary Visible Side

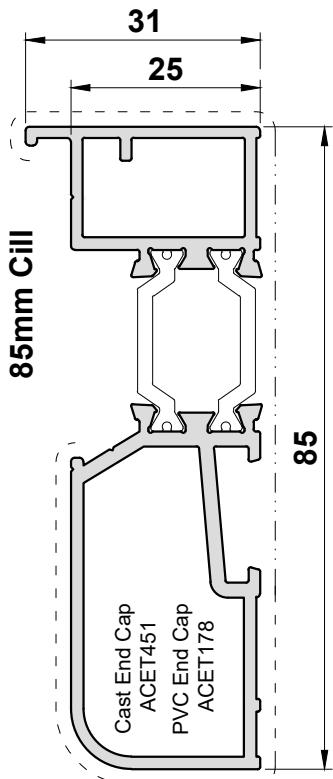
ETC451
85mm Cill




ETC452
135mm Cill

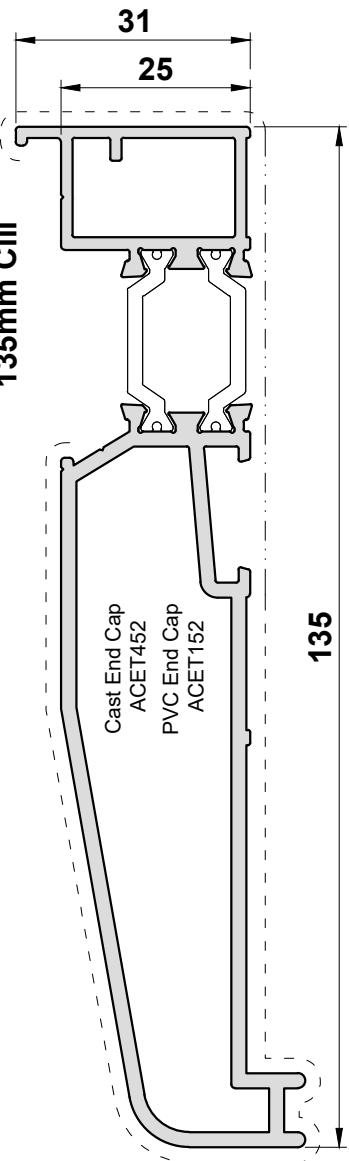


ETC457
150mm Cill

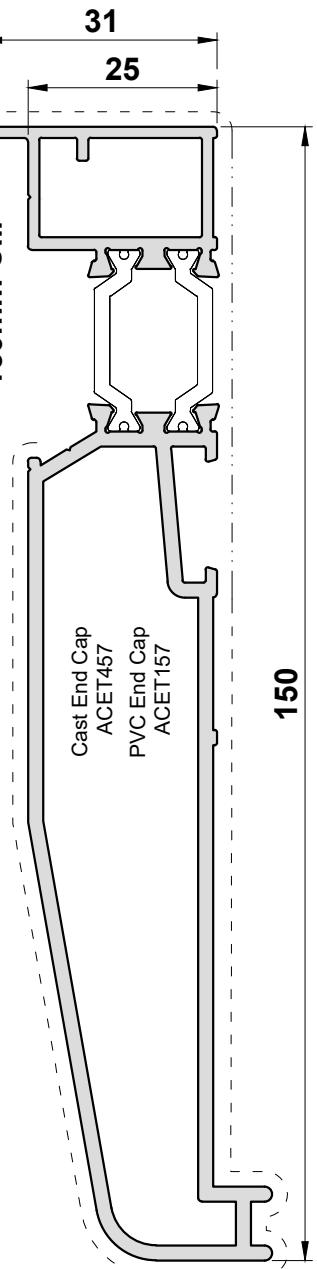

Scale 1:1

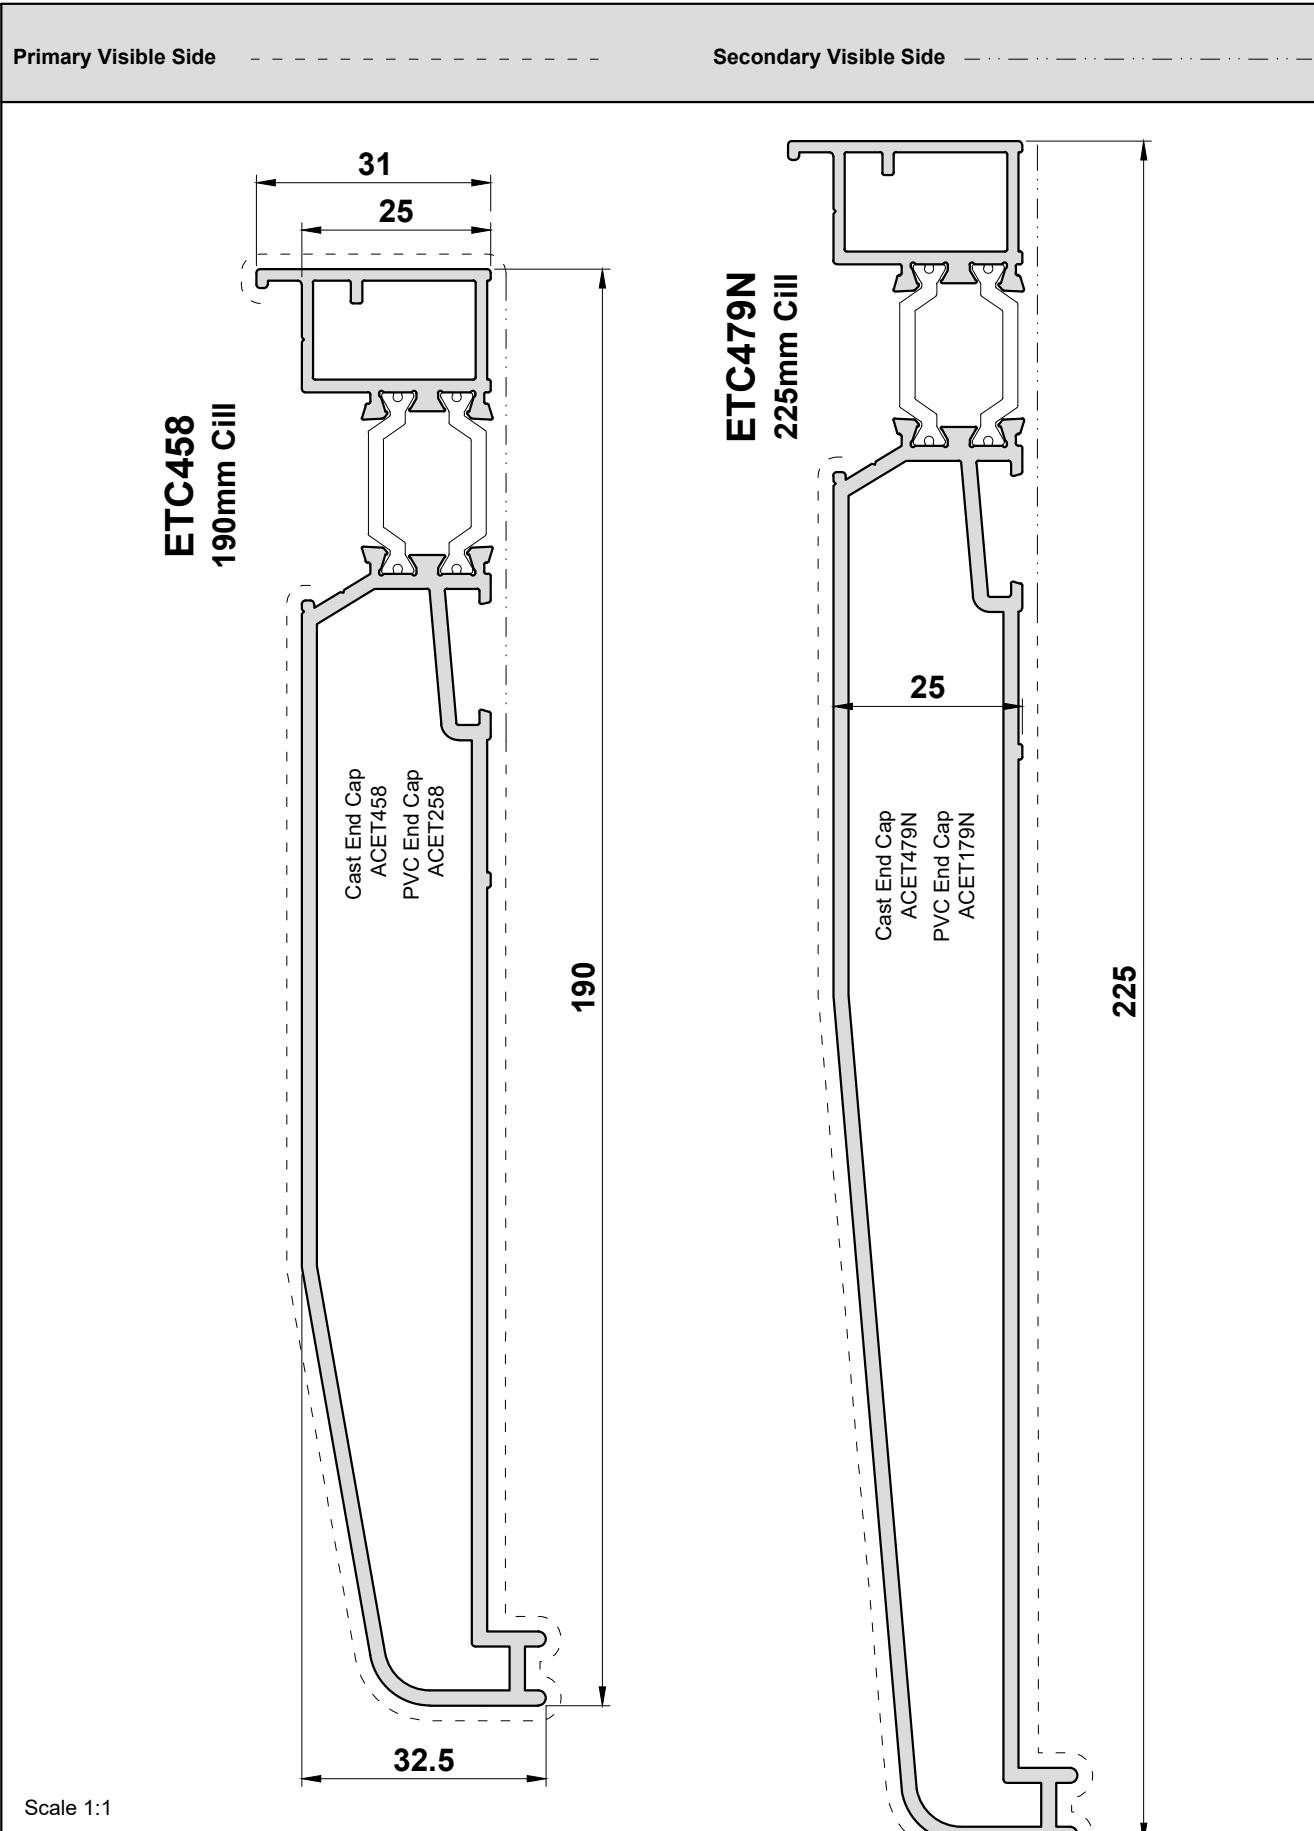


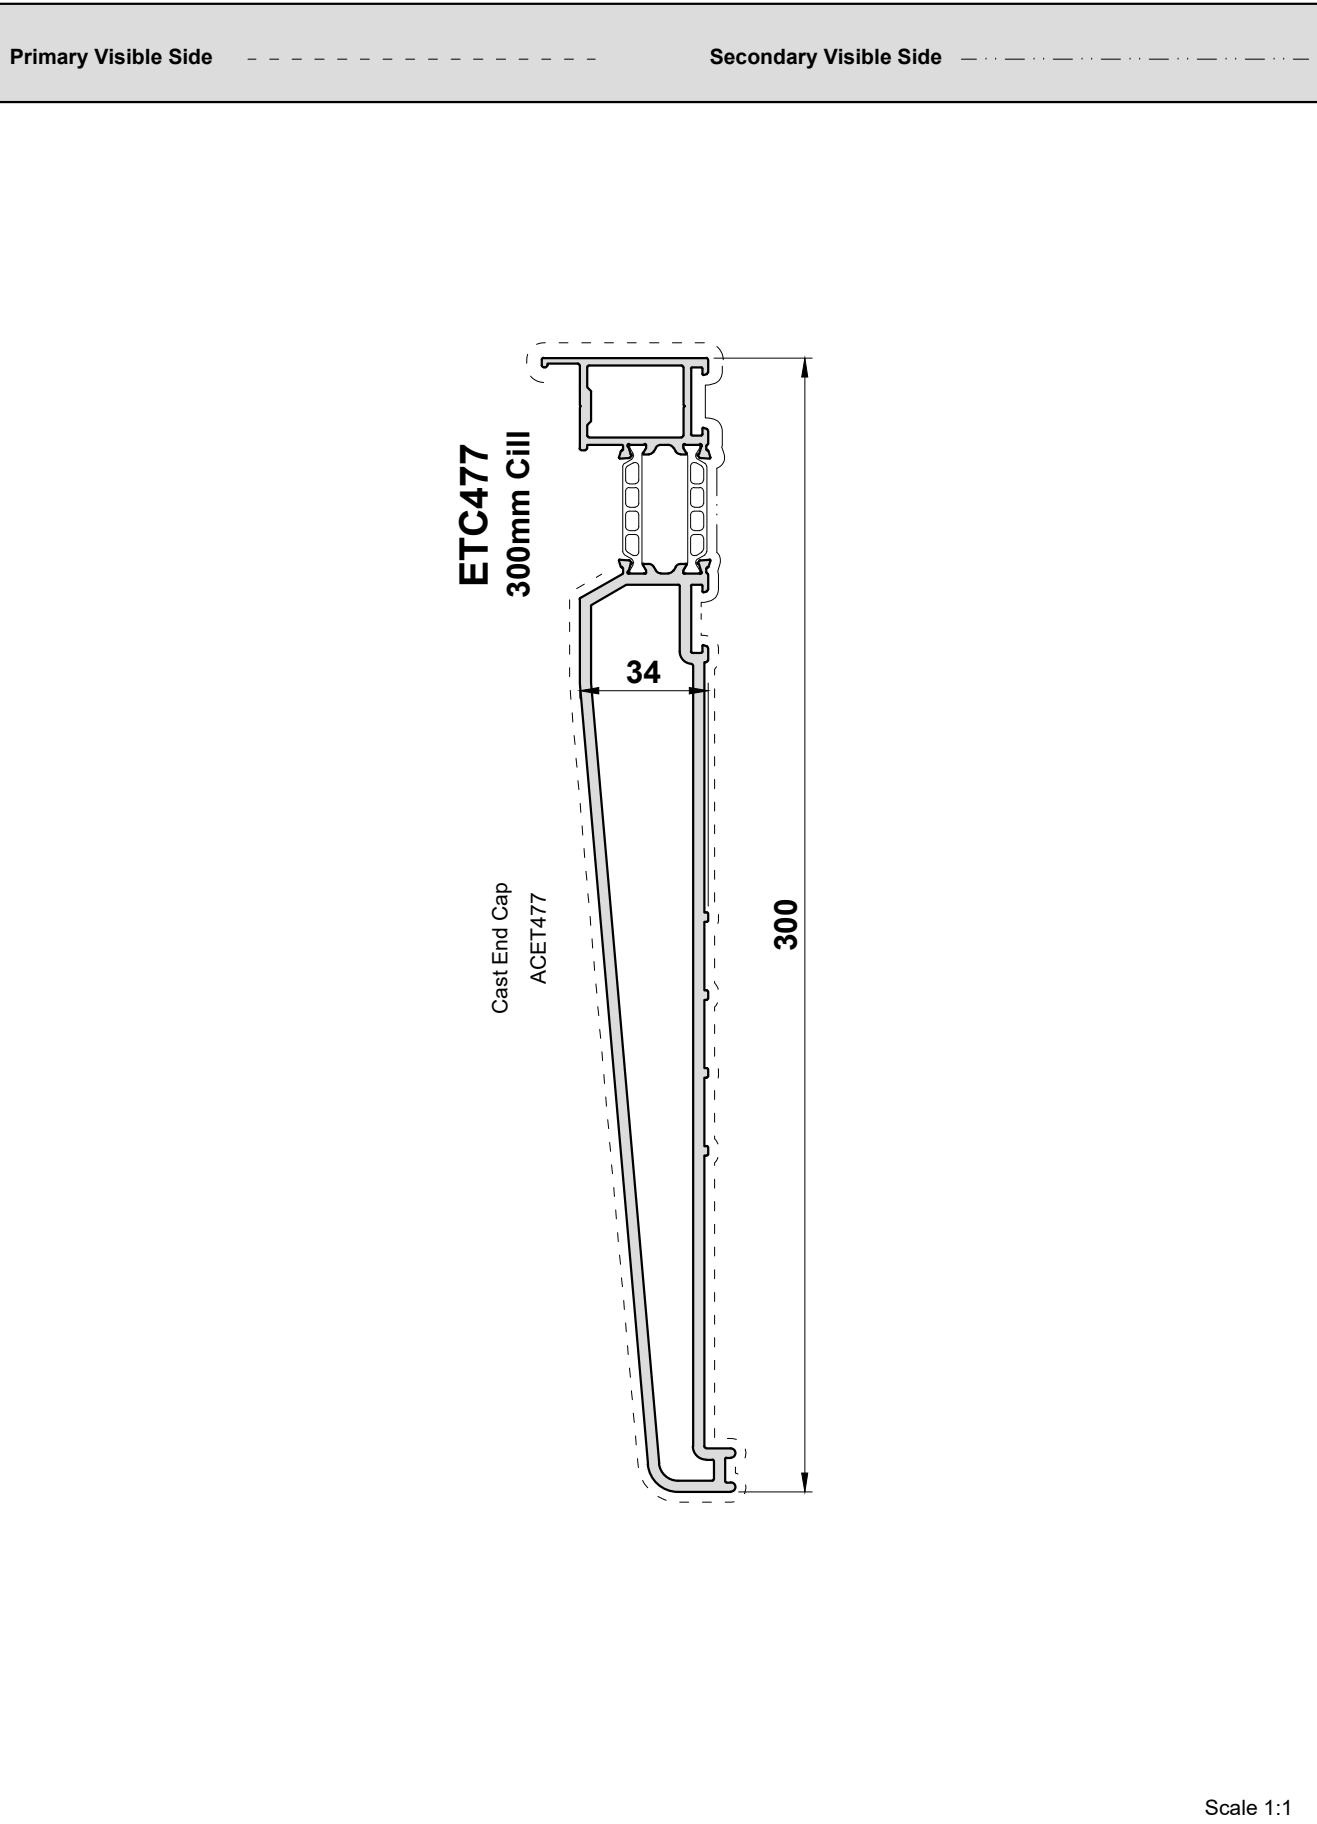


Primary Visible Side

Secondary Visible Side

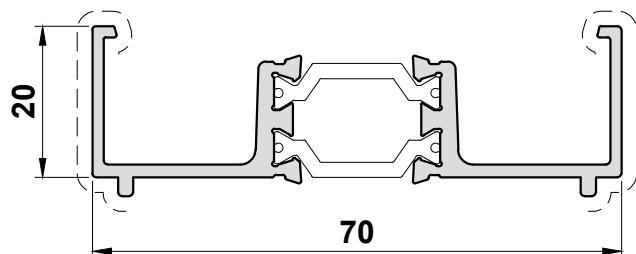
UN3020
70mm x 20mm Frame Extension



UN3370
30mm x 70mm Head Extension

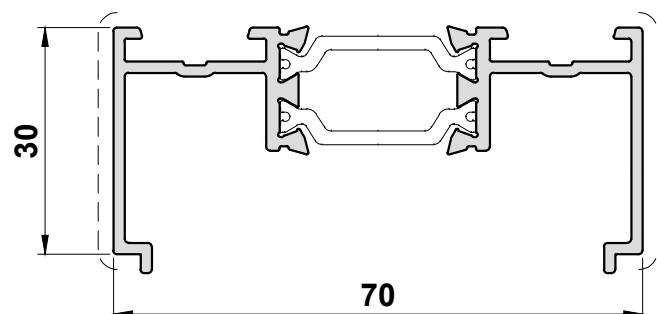

UN3270
70 x 42mm Head Extension

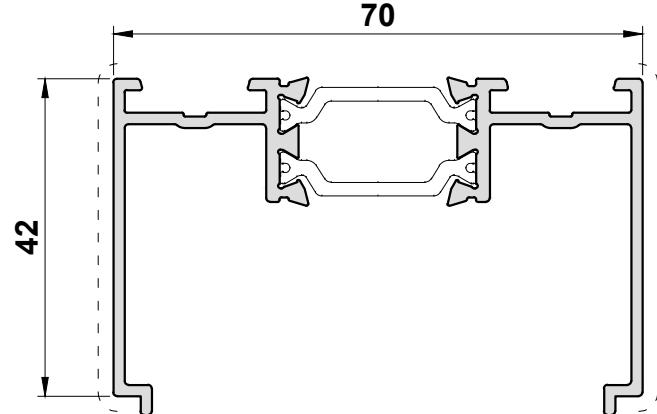


Scale 1:1

Primary Visible Side

Secondary Visible Side


UN3570

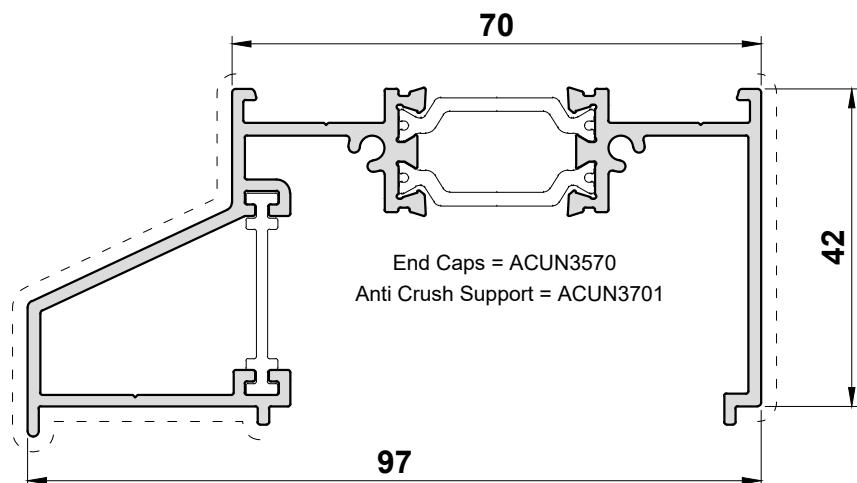70 x 42mm Hooded Head Extension



UN3577

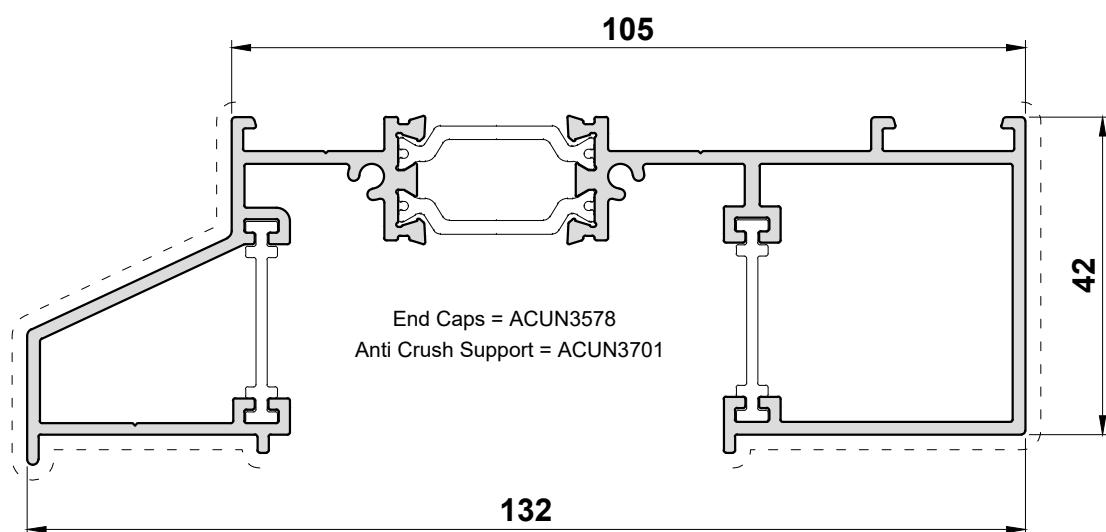
70 x 42mm Hooded Head Extension



Scale 1:1

Primary Visible Side

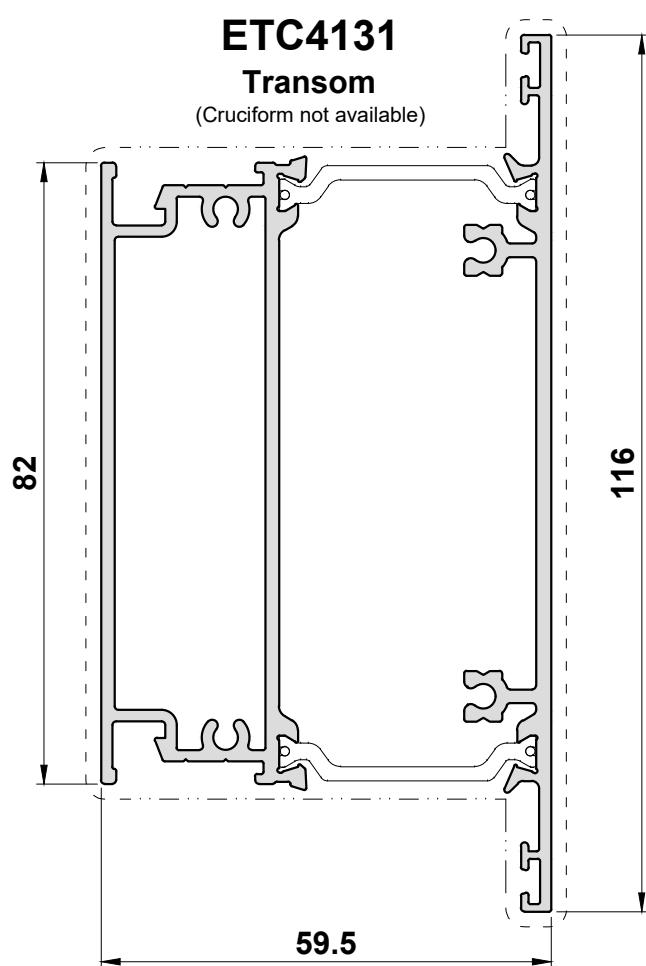Secondary Visible Side




Scale 1:1

Section B

Accessories

Photos & Drawings

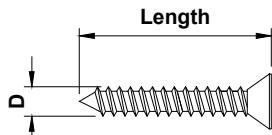Countersunk Screws



Gauge	'D' (mm)
No.6	3.5
No.7	3.8
No.8	4
No.10	5
No.12	6


Part Number	Gauge	X	Length	Description	Box Qty.
ACUN3530	No.6	X	5/8" (16mm)	Countersunk Pozi Self Tapper S/S	100
MUA025SSZ	No.6	X	1" (25mm)	Countersunk Pozi Self Tapper S/S	100
ACET067	No.7	X	1/2" (12mm)	Countersunk Pozi Self Tapper S/S	100
ACET060	No.7	X	1" (25mm)	Countersunk Pozi Self Tapper S/S	100
ACET066	No.7	X	1 1/2" (40mm)	Countersunk Pozi Self Tapper S/S	100
MUA067SSZ	No.7	X	2" (50mm)	Countersunk Pozi Self Tapper S/S	100
ACET064	No.8	X	5/8" (16mm)	Countersunk Pozi Self Tapper S/S	100
ACUN3512	No.8	X	1 1/4" (30mm)	Countersunk Pozi Self Tapper S/S	100
ACUN3513	No.8	X	1 3/4" (45mm)	Countersunk Pozi Self Tapper S/S	100
ACET072	No.8	X	2 1/2" (60mm)	Countersunk Pozi Self Tapper S/S	100
ACET048	No.10	X	3/8" (10mm)	Countersunk Pozi Self Tapper S/S	100
ACIM062	No.10	X	1 1/4" (30mm)	Countersunk Pozi Self Tapper S/S	100
ACET062	No.10	X	2" (50mm)	Countersunk Pozi Self Tapper S/S	100
ACET076	No.10	X	2 1/2" (60mm)	Countersunk Pozi Self Tapper S/S	100

POLYAMIDE SCREWS

Part Number	Gauge	X	Length	Description	Box Qty.
ACET490	4.3mm	X	16mm	Countersunk PH2 Polyamide Screw	1000
ACET290	4.3mm	X	20mm	Countersunk PH2 Polyamide Screw	100
ACET390	4.3mm	X	25mm	Countersunk PH2 Polyamide Screw	200
ACET190	4.3mm	X	45mm	Countersunk PH2 Polyamide Screw	1000
ACVS062	4.3mm	X	65mm	Countersunk PH2 Polyamide Screw	1000

 <small>T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm</small>	 <small>Screw (Grub)</small>	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	

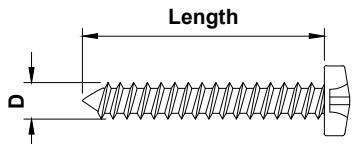Pan Head Screws




Gauge	'D' (mm)
No.6	3.5
No.7	3.8
No.8	4
No.10	5
No.12	6

Part Number	Gauge	X	Length	Description	Box Qty.
ACET068	No.8	X	3/8" (10mm)	Pozi Flange AB	100
ACET063	No.8	X	1/2" (12mm)	Pan Head Self Tapper	100
ACET070	No.8	X	1/2" (12mm)	Pozi Flange Self Tapper S/S	100
ACUN3535	No.8	X	5/8" (16mm)	Pan Head Pozi S/S	100
ACET099	No.8	X	3/4" (20mm)	Pozi Flange Self Tapper S/S	100
ACDR050	4.8mm	X	32mm	Pan Head Pozi S/S	200
PUA028	No.10	X	1" (25mm)	Pan Head Pozi S/S	100
ACDR052	No.10	X	2" (50mm)	Pan Head Self Tapper S/S	200
ACET079	No.10	X	2 1/2" (60mm)	Pan Head Pozi S/S	100
ACW20160	No.12	X	1" (25mm)	Flange Head Self Tapper S/S	100
ACMC109	6.3mm	X	38mm	DIN7981 - Pan Head Self Tapper	200

 <small>T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm</small>		MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black	X	Y

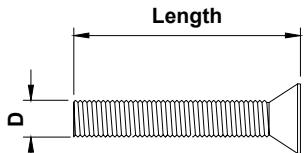Machine Screws



Thread	'D' (mm) Nominal
M4	4
M5	5
M6	6
M8	8
M10	10

Part Number	Thread	X	Length	Description	Box Qty.
ACET122	M4	X	10	CSK Pozi Machine Screw	100
ACET123	M4	X	20	CSK Pozi Machine Screw	100
ACDV264	M4	X	35	CSK Pozi Machine Screw	100
ACSG071	M4	X	40	CSK Pozi Machine Screw	100
ACDV266	M4	X	45	CSK Pozi Machine Screw	100
ACDV262	M4	X	50	CSK Pozi Machine Screw	100
ACDV265	M4	X	60	CSK Pozi Machine Screw	100
ACDR051	M5	X	10	CSK Pozi Machine Screw	100
ACET069	M5	X	12	CSK Pozi Machine Screw	100
HEA132	M5	X	16	CSK Pozi Machine Screw	100
WCA134	M5	X	20	CSK Pozi Machine Screw	100
WCA143	M5	X	25	CSK Pozi Machine Screw	50
ACVS061	M5	X	40	CSK Pozi Machine Screw	100
ACET133	M5	X	50	CSK Pozi Machine Screw	100
ACET220	M5	X	60	CSK Pozi Machine Screw	100
ACET238	M5	X	70	CSK Pozi Machine Screw	100
ACMX861	M5	X	80	DIN965 - CSK Machine Screw	10
ACMX862	M5	X	90	DIN965 - CSK Machine Screw	10
ACUN3503	M6	X	10	CSK Socket Machine Screw	24
ACUN3501	M6	X	13	CSK Flange Socket Machine Screw	48
ACMX852	M6	X	16	DIN965 - CSK Machine Screw	10
HEA390	M6	X	16	CSK Socket Machine Screw	32
ACET235	M6	X	60	CSK Pozi Machine Screw	100
ACET237	M6	X	70	CSK Pozi Machine Screw	100




T-BARS
ACVG65=2.5mm
ACVG66=3.0mm
ACVL150=4.0mm



Screw (Grub)

MF	= Mill Finish
SA	= Silver Anodised
KL	= Basic Colour
HP	= Special Colour
SSC	= Smooth Satin Chrome
SMC	= Smokey Chrome
PC	= Polished Chrome

W	= White
Z	= Black



Glazing Gaskets

Retaining Gasket

Commonly known as an E Gasket.
Retaining gaskets create a seal between the Glass and the Aluminium Profile.

Thickness	Low Line			High Line			Part number
	5mm	4mm	4mm	3mm	2mm	2mm	
							ACVG231
							200m
							BL
							ACVG31
							200m
							BL
							ACVG131
							100m
							BL
							ACET843
							200m
							BL
							ACET842
							200m
							BL
							ACET841
							200m
							BL
							ACET835
							200m
							BL
							ACVG131N
							100m
							BL
							ACUN3065
							100m
							BL

Thickness	Drawing 1:1	Part number		
		Coil length		
		Available Colours		

Wedge Gasket

Wedge Gaskets help to hold the bead in place by providing tension between the bead and the glazing unit.

Thickness	Low Line			High Line			Part number
	5mm - 4mm	4mm - 3mm	6mm	5mm	4mm	3mm	
							ACVG32
							100m
							BL
							ACVG32N
							100m
							BL
							ACVG33
							100m
							BL
							ACVG33N
							100m
							BL
							ACVG34
							100m
							BL
							ACVG34N
							100m
							BL
							ACVG340
							100m
							BL
							ACVG340N
							100m
							BL
							ACW20038
							50m
							BL
							ACET848
							200m
							BL

Image	Part Code	Pack	Unit	Application	Colour
	ACDV620 Mechanical Cleat	24	Pack	ETC4129	MF ✓ SA KL HP SSC SMC W Z PC
	ACDV916 Bead Punch Tool	1	each	UN3160G UN3160	MF SA KL HP SSC SMC W Z PC
	ACET041 Cill Nose Bracket	1	Each	ETC451 ETC452 ETC457 ETC458 ETC477 ETC479	MF ✓ SA KL HP SSC SMC W Z PC
	ACET125 Anti-Twist Clip	100	Pack	ETC4110 ETC4112 ETC4130	MF ✓ SA KL HP SSC SMC W Z PC
	ACET130 Galvanised Steel Fixing Strap 200mm x 25mm x 1.5mm	100	Pack	ETC4101 ETC4105 ETC4110 ETC4111 ETC4112 ETC4113 ETC4114 ETC4115 ETC4116	MF SA KL HP SSC SMC W Z PC
	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm Screw (Grub)	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome			

Image	Part Code	Pack	Unit	Application	Colour
	ACET131 Drainage Cover Cap For colour matched drainage caps, please order ACET432	100	Pack	Outer Frames, Sashes, Transoms & UN3000	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET152 Cill End Cap	10	Pair	ACET452	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET157 Cill End Cap	10	Pair	ETC457	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET178 Cill End Cap	10	Pair	ETC451	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET179N Cill End Cap	10	Pair	ETC479N	MF SA KL HP SSC SMC W ✓ Z ✓ PC
 ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black	X Y		

Image	Part Code	Pack	Unit	Application	Colour
	ACET258 Cill End Cap	10	Pair	ETC458	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET311 Stainless Steel Chevron	50	Pack	ETC4101 ETC4105 ETC4110 ETC4111 ETC4112 ETC4113 ETC4114 ETC4115 ETC4116 ETC4117 ETC4120 ETC4124 ETC4146 ETC4147	MF SA KL HP SSC SMC W Z PC
	ACET352 Pull in Block for Egress Hinges 2 x ACET394 required	50	pack	ETC4124 ETC4125	MF SA KL HP SSC SMC W Z PC
	ACET4026 Crimping Cleat	1	Each	ETC4124 ETC4125	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4027 Crimping Cleat	1	Each	ETC4124 ETC4125	MF ✓ SA KL HP SSC SMC W Z PC
 T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
A long metal clip with a U-shaped end and a ribbed base.	ACET4036 Anti-Twist Clip	100	Pack	ETC4105 ETC4115 ETC4116 ETC4134 ETC4135 ETC4137	MF ✓ SA KL HP SSC SMC W Z PC
A butt hinge assembly consisting of two long, thin rectangular plates with mounting holes.	ACET4050 Butt Hinge	1	Each	ETC4101 ETC4110 ETC4111 ETC4112 ETC4113 ETC4114 ETC4120 ETC4129	MF SA KL HP SSC SMC W Z PC
Two rectangular metal plates, one with two circular holes and one with four circular holes.	ACET4054 French Casement Keep Kit Kit Contains: 2 x Packers 2 x Reversible Keeps	1	Pack	ETC4138 ACET4055 ACET4138 ACUN3055	MF SA KL HP SSC SMC W Z PC
Two L-shaped metal guides used for shootbolts.	ACET4055 French Casement Shootbolt Guide	1	Pair	ETC4138 ACET4054 ACET4138 ACUN3055	MF SA KL HP SSC SMC W Z ✓ PC
A long, thin metal strip with a ribbed base and a flat top surface.	ACET4058 Bridge Packer	12	Pack	ETC4129	MF SA KL HP SSC SMC W Z PC
ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm 	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black	 		

Image	Part Code	Pack	Unit	Application	Colour
ACET4067 Non-Locking Espagnolette Handle Silver Anodised	ACET4067	1	Pack	ACET4001 to AET4006	MF SA ✓ KL HP SSC SMC W Z PC
ACET4068 Locking Espagnolette Handle Silver Anodised	ACET4068	1	Pack	ACET4001 to AET4006	MF SA ✓ KL HP SSC SMC W Z PC
ACET4070 Foam	ACET4070	1	Each	ETC4105 ETC4110 ETC4111 ETC4112 ETC4113 ETC4114 ETC4115	MF SA KL HP SSC SMC W Z ✓ PC
ACET4071 Foam	ACET4071	1	Each	ETC4101 ETC4105 ETC4110 ETC4111 ETC4112 ETC4113 ETC4114 ETC4115 ETC4116	MF SA KL HP SSC SMC W Z ✓ PC
ACET4072 Foam	ACET4072	1	Each	ETC4120	MF SA KL HP SSC SMC W Z ✓ PC
 Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4073 Foam	1	Each	ETC4129	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4075 Foam	1	Each	ETC4130	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4076 Foam	1	Each	ETC4135	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4077 Foam	1	Each	ETC4146	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4078 Foam	1	Each	ETC4147	MF SA KL HP SSC SMC W Z ✓ PC
 ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4081 Foam	1	Each	ETC4129	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4082 Foam	1	Each	ETC4110 ETC4111 ETC4112 ETC4113 ETC4115 ETC4120 ETC4130 ETC4135	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4110 Crimping Cleat	24	Pack	ETC4110 ETC4111 ETC4112 ETC4113 ETC4115	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4111 Mechanical Cleat	24	Pack	ETC4110 ETC4111 ETC4112 ETC4129	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4115 Crimping Cleat	24	Pack	ETC4115	MF ✓ SA KL HP SSC SMC W Z PC
 <small>T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm</small>	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4120 Crimping Cleat	24	Pack	ETC4120	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4122 Crimping Cleat	24	Pack	ETC4146	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4123 Mechanical Cleat	24	Pack	ETC4146	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4124 Crimping Cleat	24	Pack	ETC4147	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4125 Mechanical Cleat	24	Pack	ETC4146	MF ✓ SA KL HP SSC SMC W Z PC
 	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	 			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4127 Crimping Cleat	24	Pack	ETC4147	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4128 Adhesive Packer	12	Pack	ETC4147	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4129 Crimping Cleat	24	Pack	ETC4129	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4130 Cruciform Block	10	Pack	ETC4130	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4131 Offset Cruciform Block	10	Pairs	ETC4130	MF ✓ SA KL HP SSC SMC W Z PC
 	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4135 Cruciform Block	10	Pack	ETC4135	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4136 Offset Cruciform Block	10	Pairs	ETC4135	MF SA KL HP SSC SMC W Z PC
	ACET4138 End Cap	1	Pair	ETC4138 ACET4054 ACET4055 ACUN3050	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET4139 End Cap	1	Pair	ETC4139	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET4165 Cast Handle Block	1	each	ETC4124 UN3160/G	MF ✓ SA ✓ KL ✓ HP SSC SMC ✓ W ✓ Z PC
 T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4170 Foam	1	Each	ETC4111 ETC4116	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4171 Foam	1	Each	ETC4101	MF SA KL HP SSC SMC W Z ✓ PC
	ACET4180 Run-Up Block	100	Pack	Outer Frames & Transoms/ Mullions	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET4181 Run-Up Block	100	Pack	ETC4146	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACET4200 Variable Angle Cleat with screws	24	Pack	ETC4110 ETC4111 ETC4112 ETC4113	MF ✓ SA KL HP SSC SMC W Z PC
	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black		

Image	Part Code	Pack	Unit	Application	Colour
ACET4201 Variable Angle Cleat with screws		24	Pack	ETC4110 ETC4111 ETC4112 ETC4113	MF ✓ SA KL HP SSC SMC W Z PC
ACET4208 Jig for Variable Angle Cleat for ACET4200		1	Each	ETC4110 ETC4111 ETC4112 ETC4113	MF ✓ SA KL HP SSC SMC W Z PC
ACET4209 Jig for Variable Angle Cleat for ACET4201		1	Each	ETC4110 ETC4111 ETC4112 ETC4113	MF ✓ SA KL HP SSC SMC W Z PC
ACET4291N Vee Block		1	Each	ETC4110 ETC4112 ETC4115 ETC4120 ETC4146 ETC4147	MF ✓ SA KL HP SSC SMC W Z PC
ACET4292 Punches		1	Each	ETC4110 ETC4111 ETC4112 ETC4113	MF ✓ SA KL HP SSC SMC W Z PC
Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black		X	

Image	Part Code	Pack	Unit	Application	Colour
	ACET4295 Punches	1	Each	ETC4115 ETC4120	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4296 Punches	1	Each	ETC4129 ETC4146 ETC4147	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4298 Punches	1	Each	ETC4124 ETC4125	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4299 Vee Block	1	Each	ETC4129	MF ✓ SA KL HP SSC SMC W Z PC
	ACET432 Drainage Cover Cap (Colour Match)	8	Pack	Outer Frames, Sashes, Transoms & UN3000	MF SA KL ✓ HP ✓ SSC SMC W ✓ Z ✓ PC
 <small>T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm</small>	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACET4397 3mm Vee Block Packer	1	Each	ETC4124	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4380 8mm Crimping Support	1	Each	ACET4382 ACET4383 ACET4384	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4381 10mm Crimping Support	1	Each	ACET4382 ACET4383 ACET4384	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4382 14.5mm Crimping Support	1	Each	ETC4115G ETC4116G	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4383 22.5mm Crimping Support	1	Each	ETC4110G ETC4111G ETC4112G ETC4124G ETC4125G ETC4129G	MF ✓ SA KL HP SSC SMC W Z PC
 	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome				

Image	Part Code	Pack	Unit	Application	Colour																		
	ACET4384 25.5mm Crimping Support	1	Each	ETC4120G	<table border="1"> <tr><td>MF</td><td>✓</td></tr> <tr><td>SA</td><td></td></tr> <tr><td>KL</td><td></td></tr> <tr><td>HP</td><td></td></tr> <tr><td>SSC</td><td></td></tr> <tr><td>SMC</td><td></td></tr> <tr><td>W</td><td></td></tr> <tr><td>Z</td><td></td></tr> <tr><td>PC</td><td></td></tr> </table>	MF	✓	SA		KL		HP		SSC		SMC		W		Z		PC	
MF	✓																						
SA																							
KL																							
HP																							
SSC																							
SMC																							
W																							
Z																							
PC																							
	ACET451 Cill End Cap	1	Pair	ETC451	<table border="1"> <tr><td>MF</td><td>✓</td></tr> <tr><td>SA</td><td></td></tr> <tr><td>KL</td><td>✓</td></tr> <tr><td>HP</td><td>✓</td></tr> <tr><td>SSC</td><td></td></tr> <tr><td>SMC</td><td></td></tr> <tr><td>W</td><td>✓</td></tr> <tr><td>Z</td><td>✓</td></tr> <tr><td>PC</td><td></td></tr> </table>	MF	✓	SA		KL	✓	HP	✓	SSC		SMC		W	✓	Z	✓	PC	
MF	✓																						
SA																							
KL	✓																						
HP	✓																						
SSC																							
SMC																							
W	✓																						
Z	✓																						
PC																							
	ACET452 Cill End Cap	1	Pair	ETC452	<table border="1"> <tr><td>MF</td><td>✓</td></tr> <tr><td>SA</td><td></td></tr> <tr><td>KL</td><td>✓</td></tr> <tr><td>HP</td><td>✓</td></tr> <tr><td>SSC</td><td></td></tr> <tr><td>SMC</td><td></td></tr> <tr><td>W</td><td>✓</td></tr> <tr><td>Z</td><td>✓</td></tr> <tr><td>PC</td><td></td></tr> </table>	MF	✓	SA		KL	✓	HP	✓	SSC		SMC		W	✓	Z	✓	PC	
MF	✓																						
SA																							
KL	✓																						
HP	✓																						
SSC																							
SMC																							
W	✓																						
Z	✓																						
PC																							
	ACET457 Cill End Cap	1	Pair	ETC457	<table border="1"> <tr><td>MF</td><td>✓</td></tr> <tr><td>SA</td><td></td></tr> <tr><td>KL</td><td>✓</td></tr> <tr><td>HP</td><td>✓</td></tr> <tr><td>SSC</td><td></td></tr> <tr><td>SMC</td><td></td></tr> <tr><td>W</td><td>✓</td></tr> <tr><td>Z</td><td>✓</td></tr> <tr><td>PC</td><td></td></tr> </table>	MF	✓	SA		KL	✓	HP	✓	SSC		SMC		W	✓	Z	✓	PC	
MF	✓																						
SA																							
KL	✓																						
HP	✓																						
SSC																							
SMC																							
W	✓																						
Z	✓																						
PC																							
	ACET458 Cill End Cap	1	Pair	ETC458	<table border="1"> <tr><td>MF</td><td>✓</td></tr> <tr><td>SA</td><td></td></tr> <tr><td>KL</td><td>✓</td></tr> <tr><td>HP</td><td>✓</td></tr> <tr><td>SSC</td><td></td></tr> <tr><td>SMC</td><td></td></tr> <tr><td>W</td><td>✓</td></tr> <tr><td>Z</td><td>✓</td></tr> <tr><td>PC</td><td></td></tr> </table>	MF	✓	SA		KL	✓	HP	✓	SSC		SMC		W	✓	Z	✓	PC	
MF	✓																						
SA																							
KL	✓																						
HP	✓																						
SSC																							
SMC																							
W	✓																						
Z	✓																						
PC																							
 <small>T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm</small>	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome																						

Image	Part Code	Pack	Unit	Application	Colour
	ACET460 Inline Espag Handle with 9mm Spindle	1	Each	ACET4001 to AET4006	MF SA KL ✓ HP ✓ SSC ✓ SMC ✓ W ✓ Z ✓ PC ✓
	ACET465 Cranked Espag Handle with 9mm Spindle	1	Each	ACET4001 to AET4006	MF SA KL ✓ HP ✓ SSC ✓ SMC ✓ W ✓ Z ✓ PC ✓
	ACET477 Cill End Cap	1	Pair	ETC477	MF ✓ SA KL ✓ HP ✓ SSC SMC W ✓ Z ✓ PC
	ACET479N Cill End Cap	1	Pair	ETC479N	MF ✓ SA KL ✓ HP ✓ SSC SMC W ✓ Z ✓ PC
	ACET4930 Drill Jig	1	Pair	ACET4130 ETC4130	MF ✓ SA KL HP SSC SMC W Z PC
 T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black	 		

Image	Part Code	Pack	Unit	Application	Colour
	ACET4904 Drill Jig	1	Each	ACETME16	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4917 Punches	1	Pair	ETC4117	MF SA KL HP SSC SMC W Z PC
	ACET4935 Drill Jig	1	Pair	ACET4135 ETC4135	MF ✓ SA KL HP SSC SMC W Z PC
	ACET4950 Punch Tool	1	Each	ETC4110 ETC4111 ETC4112 ETC4113 ETC4129 ETC4146	MF SA KL HP SSC SMC W Z PC
	ACET495 Handle Fixing Kit 1 Pack Contains: 2No. 5 x 12 SS CSK Machine Screws	1	Pack	ACET460 ACET465	MF ✓ SA KL HP SSC SMC W Z PC
	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm Screw (Grub)	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome			

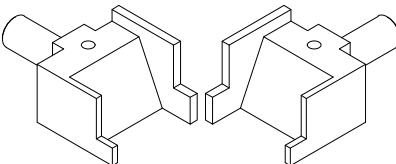
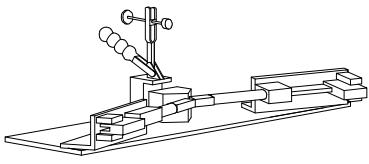

Image	Part Code	Pack	Unit	Application	Colour
	ACET513 13mm Cavity Hinge Protector 4 Per Set (2 pairs)	50	Sets	ETC4124 ETC4125	MF ✓ SA KL HP SSC SMC W Z PC
	ACET516 16mm Cavity Hinge Protector 4 Per Set (2 pairs)	50	Sets	ETC4120 ETC4129	MF ✓ SA KL HP SSC SMC W Z PC
	ACET615 Crimping Cleat	24	Pack	ETC4146	MF ✓ SA KL HP SSC SMC W Z PC
	ACET624 Stainless Steel Chevron	100	Pack	ETC4120 ETC4129	MF SA KL HP SSC SMC W Z PC
	ACET652 Pull-In Blocks	50	Pack	ETC4120 ETC4129	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome				


Image	Part Code	Pack	Unit	Application	Colour
	ACET695 Glass Adjuster Kit Kit Includes: 1 x Adjusting Screw 1 x Threaded Block 1 x Steel Cover 1 x ABS Corner	1	Kit	ETC4129	MF SA KL HP SSC SMC W Z PC
	ACET820 Crimping Cleat	24	Pack	ETC4110 ETC4111 ETC4112 ETC4113 ETC4120 ETC4129	MF ✓ SA KL HP SSC SMC W Z PC
	ACET963R Punch Tool	1	Each	ETC4110 ETC4111 ETC4112 ETC4113 ETC4129 ETC4146	MF SA KL HP SSC SMC W Z PC
	ACGSL045 Drainage Cap	100	Pack		MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACSL013B Mechanical Cleat	24	Pack	ETC4110 ETC4111 ETC4112 ETC4115	MF ✓ SA KL HP SSC SMC W Z PC
 T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome				

Image	Part Code	Pack	Unit	Application	Colour
	ACUN3000 End Caps for UN3000	10	Pairs	UN3000	MF SA KL HP SSC SMC W Z ✓ PC
	ACUN3055 French Casement Shootbolt Kit Includes: 2 x Cam connectors 2 x 180mm SS threaded bar 2 x Stainless Steel Shootbolt 2 x M8 Nuts	1	Kit	ETC4138 ACET4054 ACET4055 ACET4138	MF SA KL HP SSC SMC W Z PC
	ACUN3570 UN3570 End Caps	1	Pair	UN3570	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACUN3578 UN3577 End Caps	1	Pair	UN3577	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACUN3701 Anti-Crush Support	25	Pack	UN3570	MF SA KL HP SSC SMC W Z PC
 	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome				

Image	Part Code	Pack	Unit	Application	Colour
	ACUN3950 Vee Block	1	Each	ACUN3951 ACUN3952 ACUN3953 'G' Profiles	MF SA KL HP SSC SMC W Z PC
	ACUN3951 ACUN3950 Faceplate	1	Each	ACUN3950 ACUN3952 'G' Profiles (not ETC4129)	MF SA KL HP SSC SMC W Z PC
	ACUN3952 ACUN3950 Nylon Support	1	Each	ACUN3950 ACUN3951 ACUN3953 'G' Profiles	MF SA KL HP SSC SMC W Z PC
	ACUN3953 ACUN3950 Faceplate	1	Each	ACUN3950 ACUN3952 ACUN3953 ETC4129G	MF SA KL HP SSC SMC W Z PC
	ACUN3957 Adjustable Vee Block	1	Each	ACUN3950 ACUN3958 ETC4120G ETC4124G ETC4125G 'G' Profiles	MF SA KL HP SSC SMC W Z PC
 <small>T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm</small>	ACUN3950 ACUN3952 ACUN3953 ETC4120G ETC4124G ETC4125G 'G' Profiles				MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome

Image	Part Code	Pack	Unit	Application	Colour
	ACUN3958 ACUN3950 Nylon Packer	1	Each	ACUN3950 ACUN3957 ETC4124G ETC4125G	MF SA KL HP SSC SMC W Z PC
	ACVL059 End Cap	1	Pair	VL72	MF SA KL HP SSC SMC W ✓ Z ✓ PC
	ACVL061 Rivet	100	Pack	VL72	MF ✓ SA KL HP SSC SMC W Z PC
	ACVL072 Cast End Cap	1	Pair	VL72	MF ✓ SA KL ✓ HP ✓ SSC SMC W ✓ Z ✓ PC
	ACVL635 PVC End Cap	1	each	ETC4136	MF SA KL HP SSC SMC W Z PC
 	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome			



Image	Part Code	Pack	Unit	Application	Colour
	ACW909 Punches	1	Pair	ETC4124	MF SA KL HP SSC SMC W Z PC
	WUT024HSZA Manual Crimper Note: Vee Blocks & Punches are Sold Separately	1	Each		MF SA KL HP SSC SMC W Z PC
					MF SA KL HP SSC SMC W Z PC
 	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm Screw (Grub)	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome			


Friction Hinge Stays 16mm Stack (Standard)

Top Hung Windows

Top Hung	Type of Hinge / Stay	Max. Vent	Height		Opening Angle (+/- 2.5°)
		Weight (kgs)	Minimum	Maximum	
ACETDHS08	Standard	12	200	350	65°
ACETDHS10		16	275	400	80°
ACETDHS12		20	350	550	80°
ACETDHS16		21	500	780	80°
ACETDHS20		26	700	1100	50°
ACETDHS24		40	850	1300	37.5°
ACETDTH24	Heavy Duty	50	850	1500	32°
ACETDHS12R	Restricted	20	350	550	14° / 65°
ACETDHS16R		21	500	780	10° / 59°
ACETDHS20R		26	700	1100	8° / 50°
ACETDHS24R		40	850	1300	7° / 37.5°

Side Hung Windows

Side Hung	Type of Hinge / Stay	Max. Vent	Width ('A')		Opening Angle (+/- 2.5°)	
		Weight (kgs)	Minimum	Maximum		
ACETDHSSH12	Standard	22	300	600	60°	
ACETDHSSH16		24	400	600	60°	
ACETSH1612L ACETSH1612R	Restricted	Left Hand R/H Non-Restricted  Right Hand L/H Non-Restricted 	22	300	600	13°/58°
ACETSH1616L ACETSH1616R		24	400	600	11°/58°	
ACETME16	Egress *use with ACET652 pull in blocks	40	365	865	90°	
ACETDSH16	Heavy Duty	40	400	1000	60°	

Note1: Vent Height / Width is measured in mm from rebate to rebate (not overall size or outer frame)



Note2: Top hung height and side hung width sizes to be reduced by 2mm where size is 450mm or smaller

Note3: Typical Dimensions based on Max. Size and Glass 30kg/metre


Note4: For additional security use ACET516 hinge protectors

Note5: Kitemark specification covers Top Hung Max. height up to 1400mm.

Note6: For sashes over 600mm, ACETME99 is recommended for ACETME16 to disable easy clean function

	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm		Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black	 

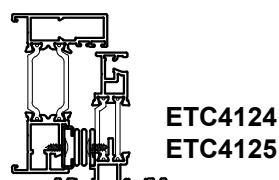
13mm Stack Friction Hinge Stays


Friction Hinge Stays 13mm Stack (Standard)

Top Hung Windows

Top Hung	Type of Hinge / Stay	Max. Vent	Height ('A')		Opening Angle (+/- 2.5°)
		Weight (kgs)	Minimum	Maximum	
ACINDS10	Standard	16	275	400	80°
ACINDS16		21	400	780	80°
ACINDS20		26	700	1100	50°
ACINDS24		40	850	1300	37.5°
ACINDP24		50	850	1500	32°
ACINDA10	Austenitic	16	275	400	80°
ACINDA16		21	400	780	80°
ACINDA20		26	700	1100	50°
ACINDA24		40	850	1300	37.5°
ACINDR12	Restricted	20	350	550	14°/65°
ACINDR16		21	500	780	10°/59°
ACINDR20		26	700	1100	8°/50°
ACINDR24		40	850	1300	7°/37.5°

Side Hung Windows

Side Hung	Type of Hinge / Stay	Max. Vent	Width ('A')		Opening Angle (+/- 2.5°)	
		Weight (kgs)	Minimum	Maximum		
ACINDSSH12	Standard	22	300	600	60°	
ACINDSSH16		24	400	600	60°	
ACINDASH12	Austenitic	22	300	600	60°	
ACINDASH16		24	400	600	60°	
ACETSH1312L ACETSH1312R	Restricted	Left Hand R/H Non-Restricted  Right Hand L/H Non-Restricted  VIEWED FROM OUTSIDE L/H Restricted R/H Restricted	22	300	600	13°/58°
ACETSH1316L ACETSH1316R			24	400	600	11°/58°
ACETME13	Egress *use with ACET352 pull in blocks	40	365	865	90°	

Note1: Vent Height / Width is measured in mm from rebate to rebate (not overall size or outer frame)

Note2: Top hung height and side hung width sizes to be reduced by 2mm where size is 450mm or smaller

Note3: Typical Dimensions based on Max. Size and Glass 30kg/metre

Note4: For additional security use ACET513 hinge protectors


Note5: Kitemark specification covers Top Hung Max. height up to 1400mm. ACINDP24 Max. height is 1500mm

Note6: For sashes over 600mm, ACETME99 is recommended for ACETME13 to disable easy clean function




Screw (Grub)

MF	= Mill Finish	W	= White
SA	= Silver Anodised	Z	= Black
KL	= Basic Colour		
HP	= Special Colour		
SSC	= Smooth Satin Chrome		
SMC	= Smokey Chrome		
PC	= Polished Chrome		




Reverse Espag Locking

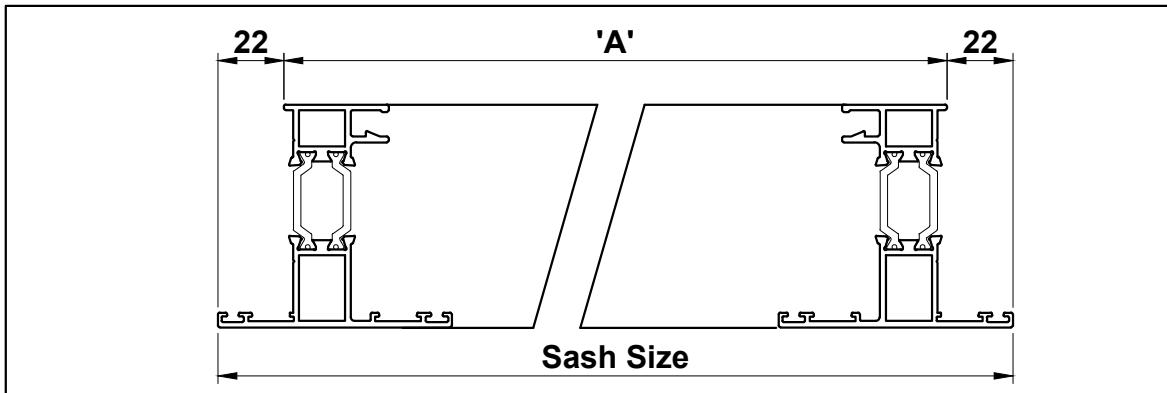


Part Code	Rod Length (mm)	Number of Keeps	Sash Rebate Size ('A')		Pack QTY
			Minimum	Maximum	
ACET4001L	359	2	364	509	20
ACET4001R					
ACET4002L	505	2	510	759	20
ACET4002R					
ACET4003L	755	2	760	1009	20
ACET4003R					
ACET4004L	1005	4	1010	1259	20
ACET4004R					
ACET4005L	1255	4	1260	1400	20
ACET4005R					

Note: To Suit Handles with 7mm x 7mm spindle

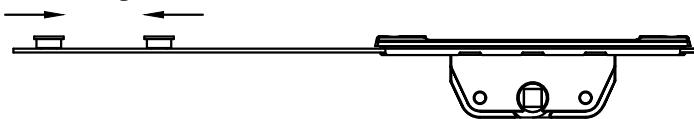Cam Locking Direction



Cam Locking Direction



Keep

	T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm		Screw (Grub)	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black		

Alitherm 400

Image	Part Code	Pack	Unit	Application	Colour
	ACMX09761 Maxi Gloss	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09762 Alu. Bright	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09763 Teflon Spray	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09764 Maxi Clean	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09765 Alu. Cleaner	1	each		MF SA KL HP SSC SMC W Z PC
 T-BARS ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			

Image	Part Code	Pack	Unit	Application	Colour
	ACMX09770 Roll & Wrap 100mm	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09775 Grip Handwrap	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09801 Protective Tape 50mm	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09802 Protective Tape 70mm	1	each		MF SA KL HP SSC SMC W Z PC
	ACMX09803 Protective Tape 100mm	1	each		MF SA KL HP SSC SMC W Z PC
	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome				

Alitherm 400

Image	Part Code	Pack	Unit	Application	Colour
	ACMX09830 Rubber Sealant	1	each		MF SA KL HP SSC SMC W Z PC
	ACSIM04 Sealing Glue Order with suffix of KL colour (eg. ACSIM04KL005) or BL=Black/WP=White/ CL=Clear	1	each		MF SA KL ✓ HP SSC SMC W ✓ Z ✓ PC
	ACSIM08 Silicon Gun	1	each		MF SA KL HP SSC SMC W Z PC
	ACSIM013 Glue for Mitre	1	each		MF SA KL HP SSC SMC W Z PC
	ACSIM014 Anti-Corrosion Coating	1	each		MF ✓ SA KL HP SSC SMC W Z PC
	MF = Mill Finish SA = Silver Anodised KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome	W = White Z = Black			



T-BARS
ACVG65=2.5mm
ACVG66=3.0mm
ACVL150=4.0mm



Screw (Grub)

Image	Part Code	Pack	Unit	Application	Colour
A blue and white cylindrical gasket roller with a textured grip.	ACUN3900 Gasket Roller	1	each		MF SA KL HP SSC SMC W Z PC
					MF SA KL HP SSC SMC W Z PC
ACVG65=2.5mm ACVG66=3.0mm ACVL150=4.0mm	Screw (Grub)	MF = Mill Finish W = White SA = Silver Anodised Z = Black KL = Basic Colour HP = Special Colour SSC = Smooth Satin Chrome SMC = Smokey Chrome PC = Polished Chrome			

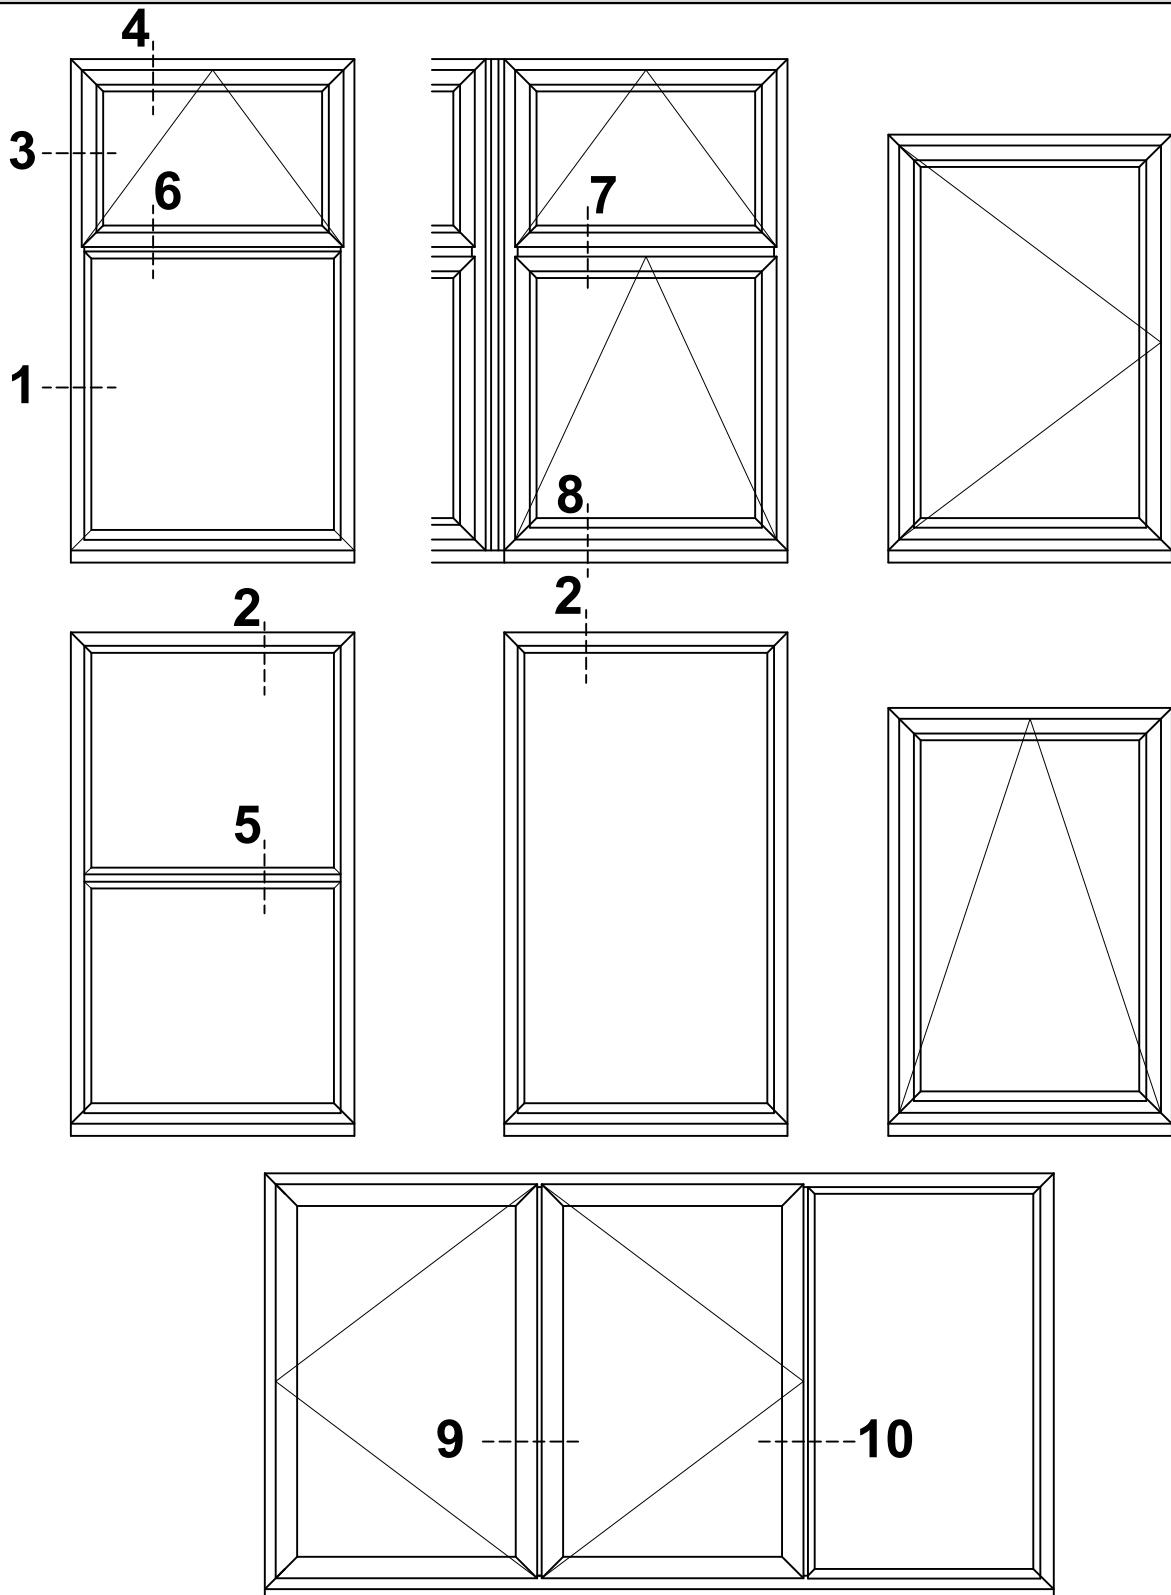
Section C

Sections

Scale Elevations





Standard Casement Detail





Do Not Scale From This Drawing

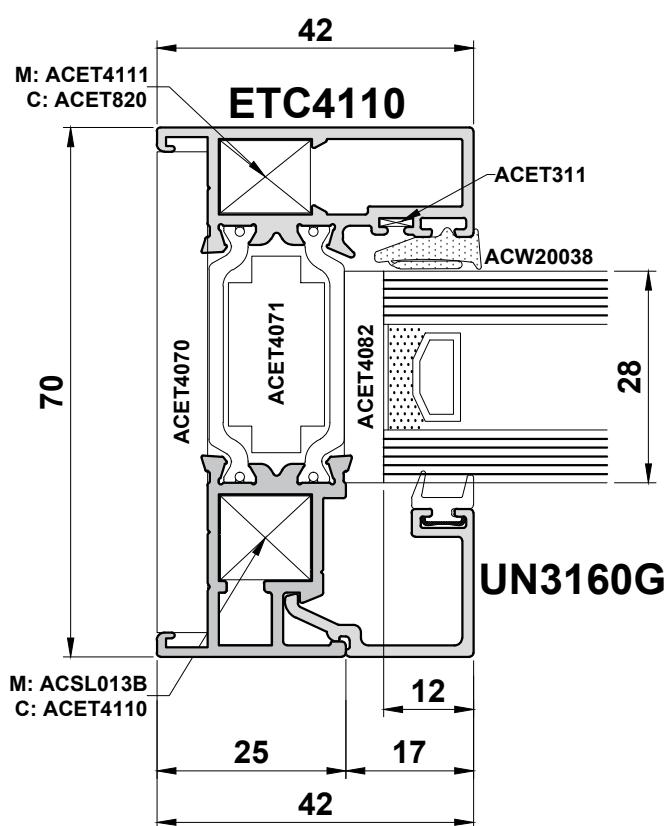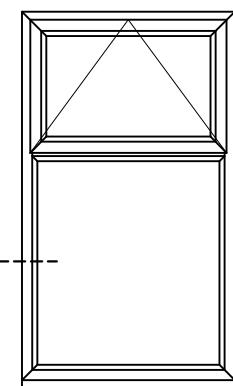Detail 1A




Do Not Scale From This Drawing

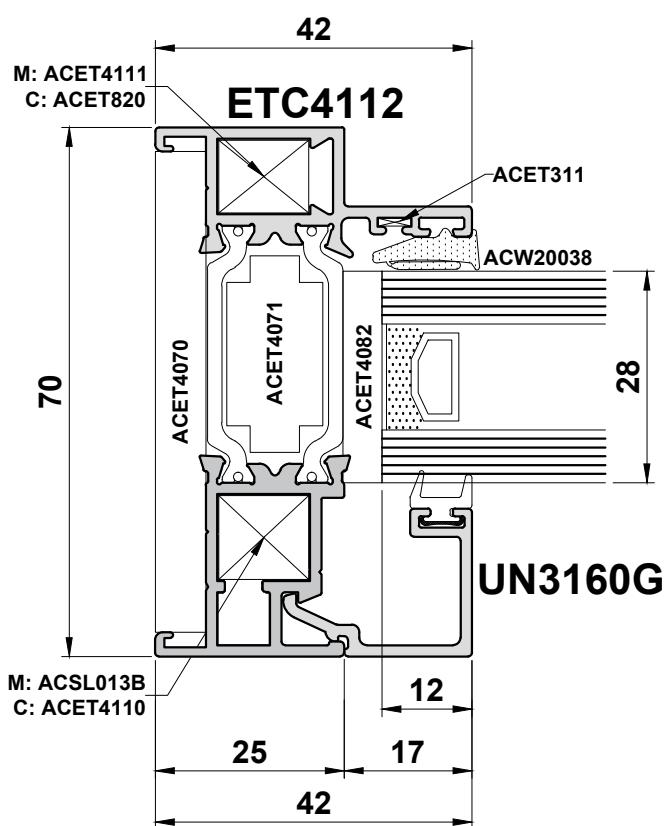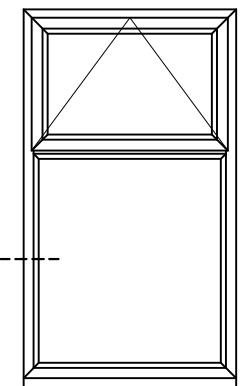Detail 1B





Do Not Scale From This Drawing

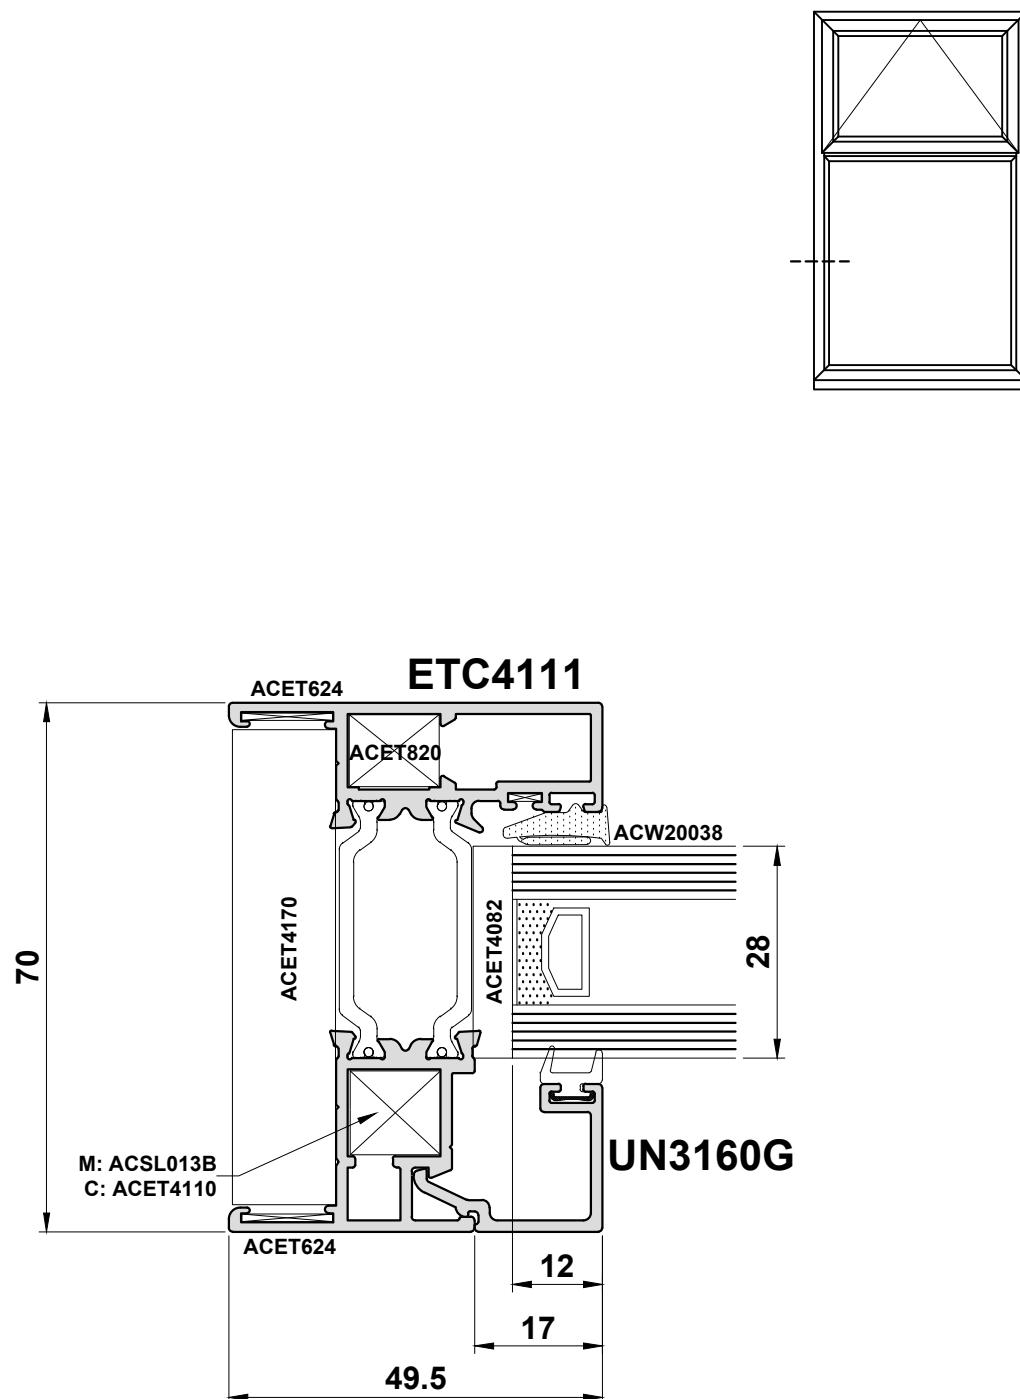Detail 1C




Do Not Scale From This Drawing

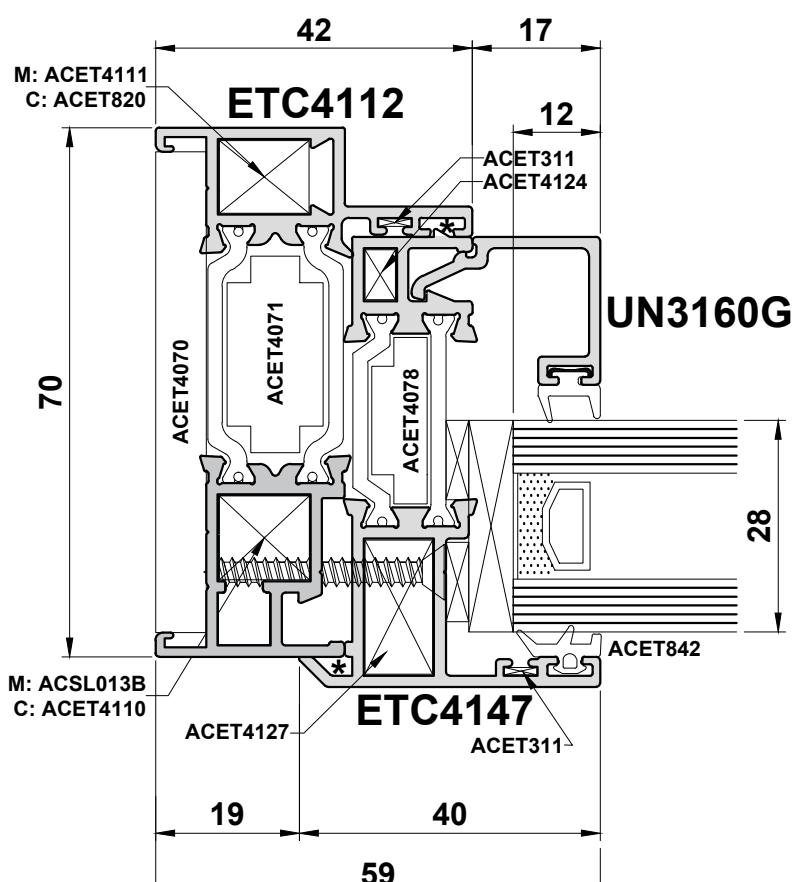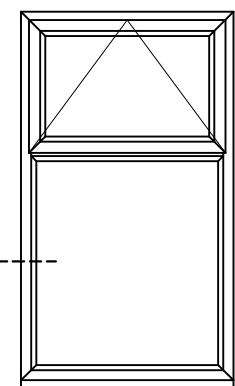Detail 1D




Do Not Scale From This Drawing

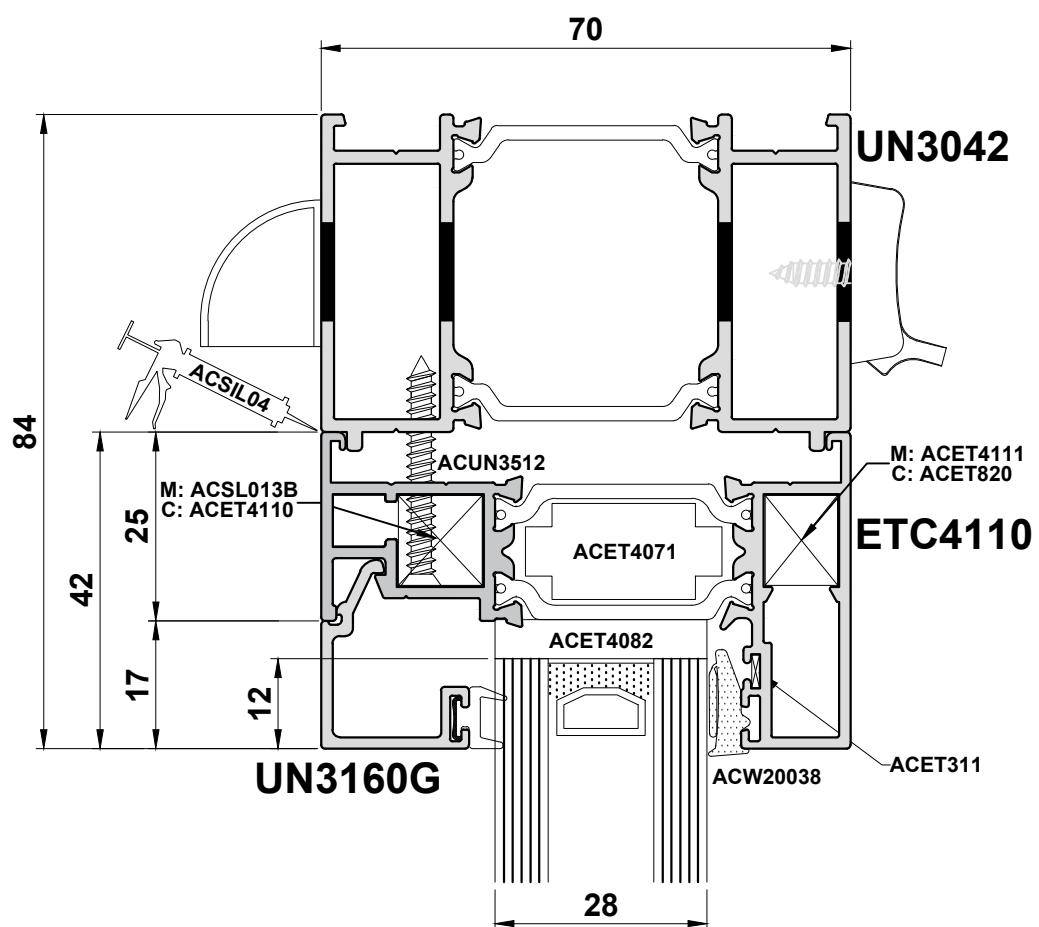Detail 2A





Do Not Scale From This Drawing

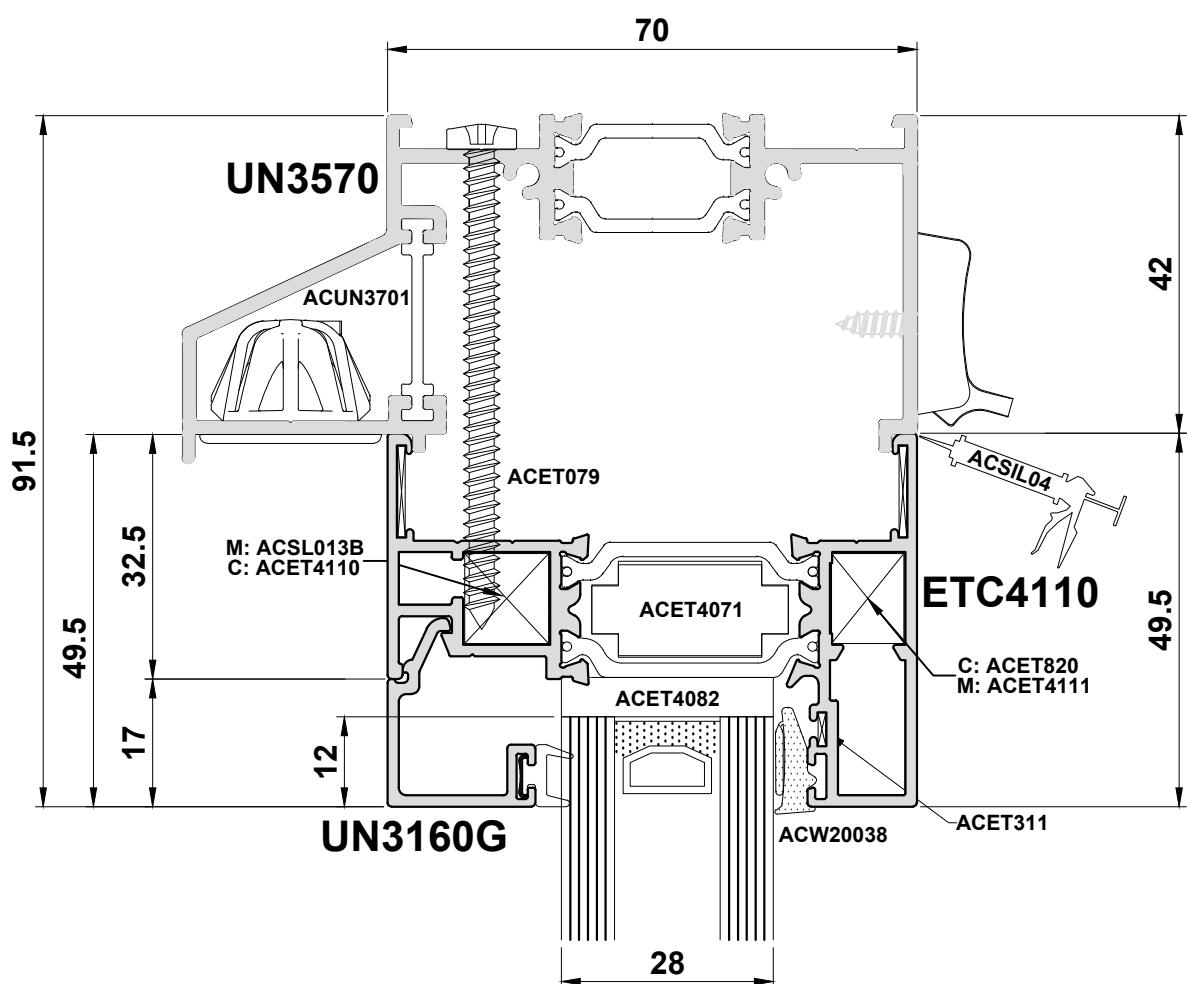Detail 2B




Do Not Scale From This Drawing

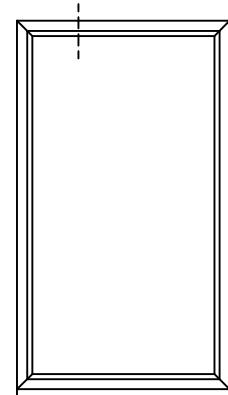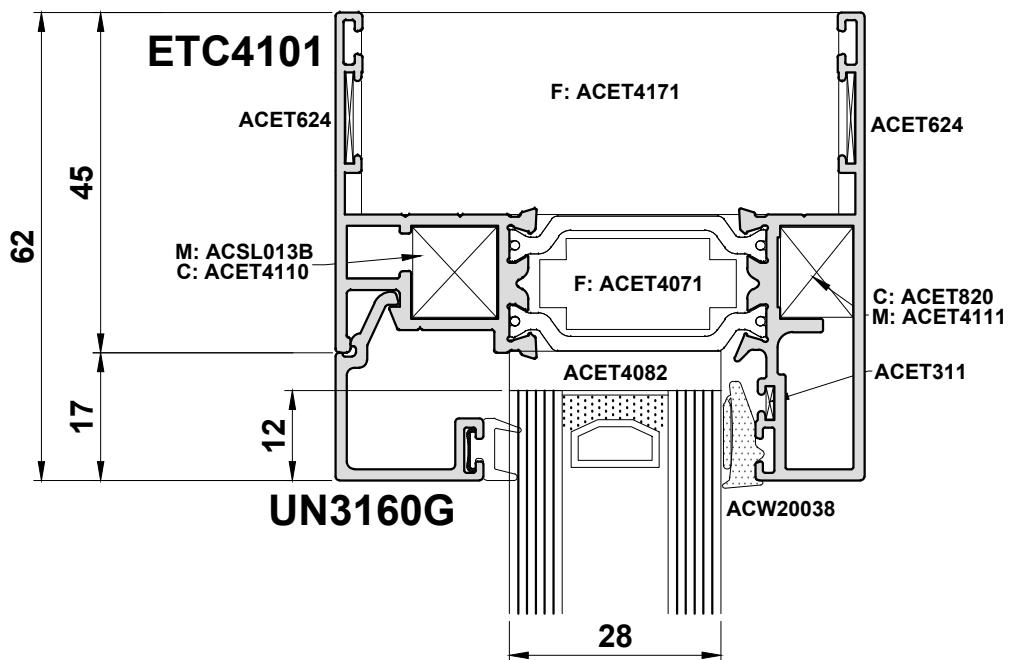Detail 2C




Do Not Scale From This Drawing

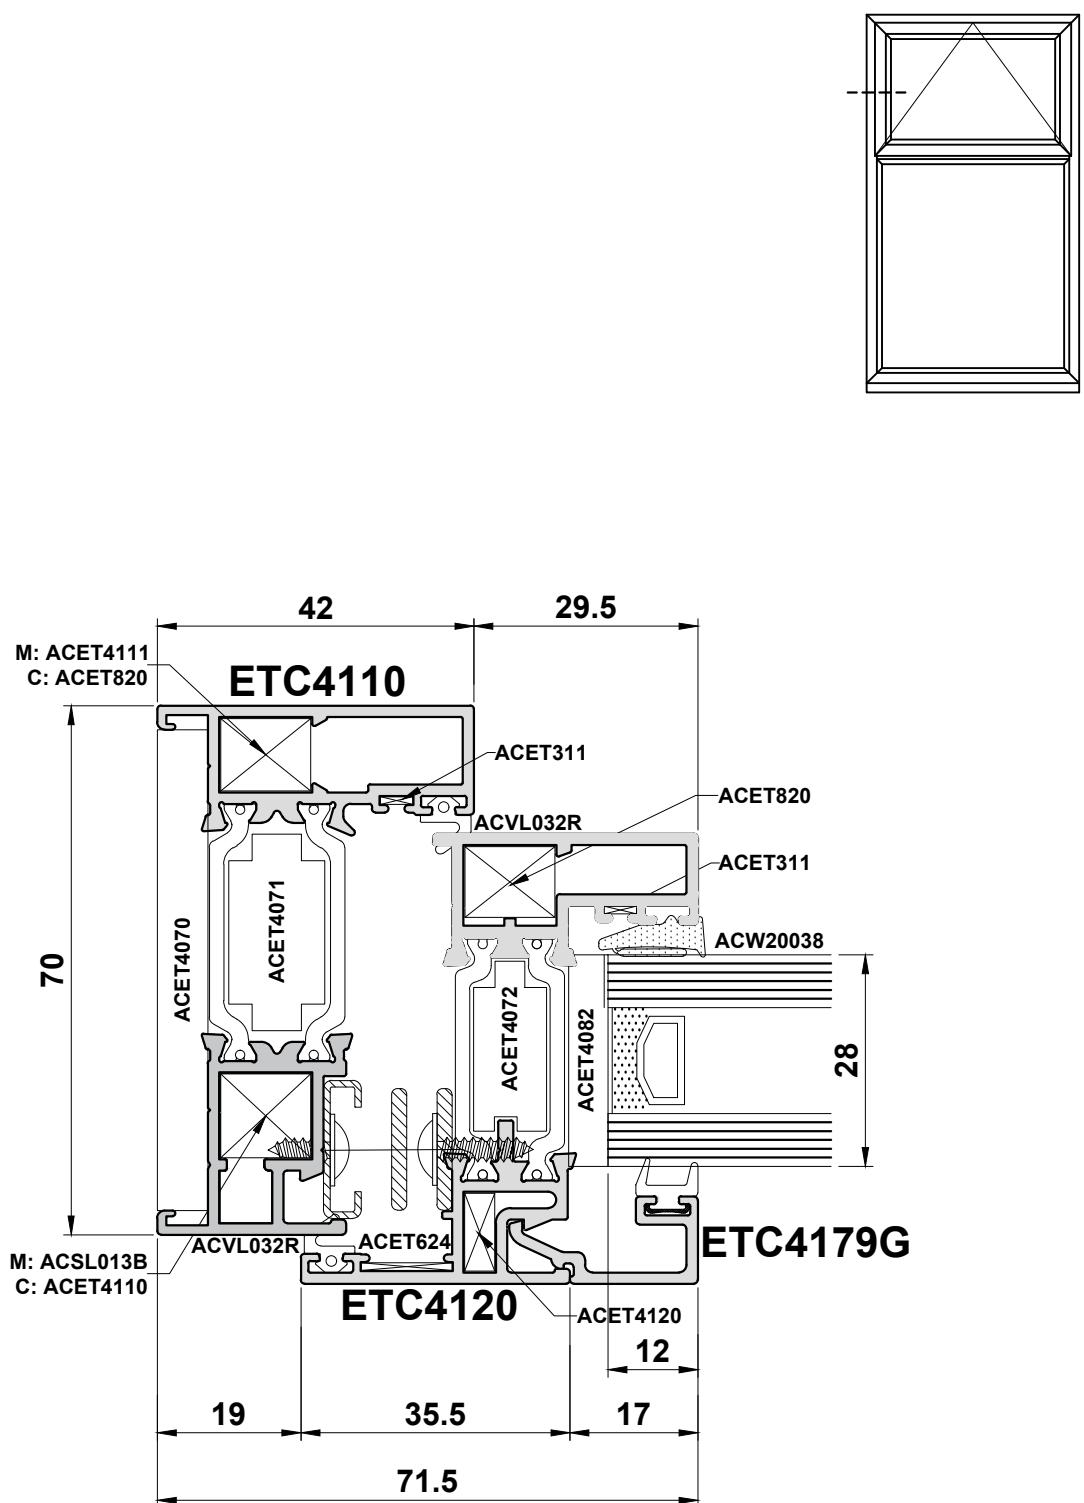Detail 3A




Do Not Scale From This Drawing

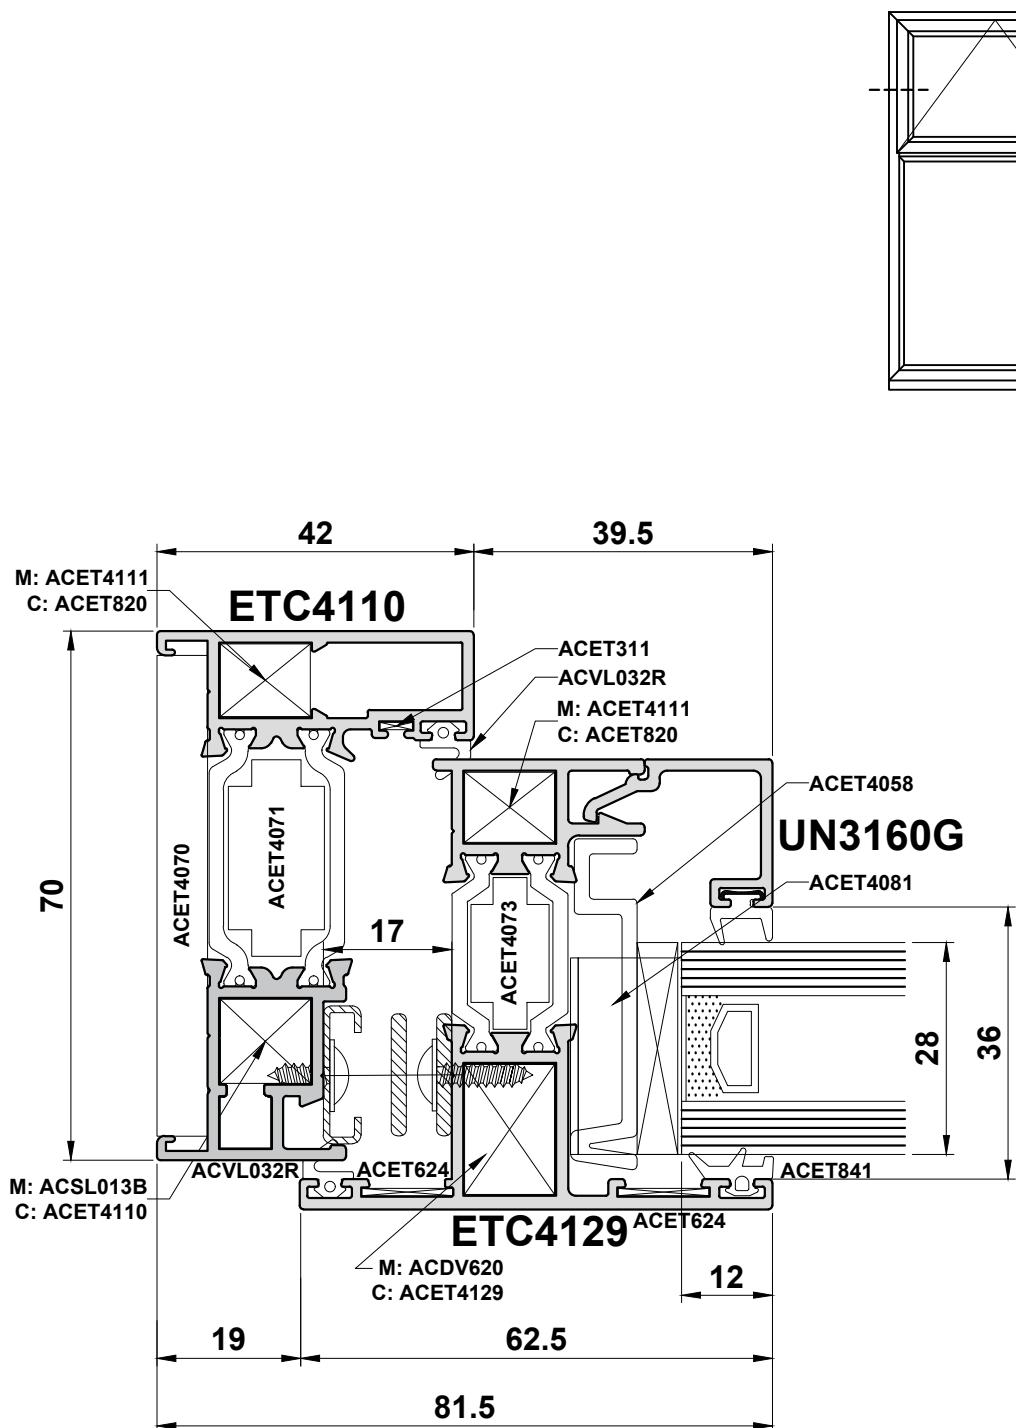Detail 3B




Do Not Scale From This Drawing

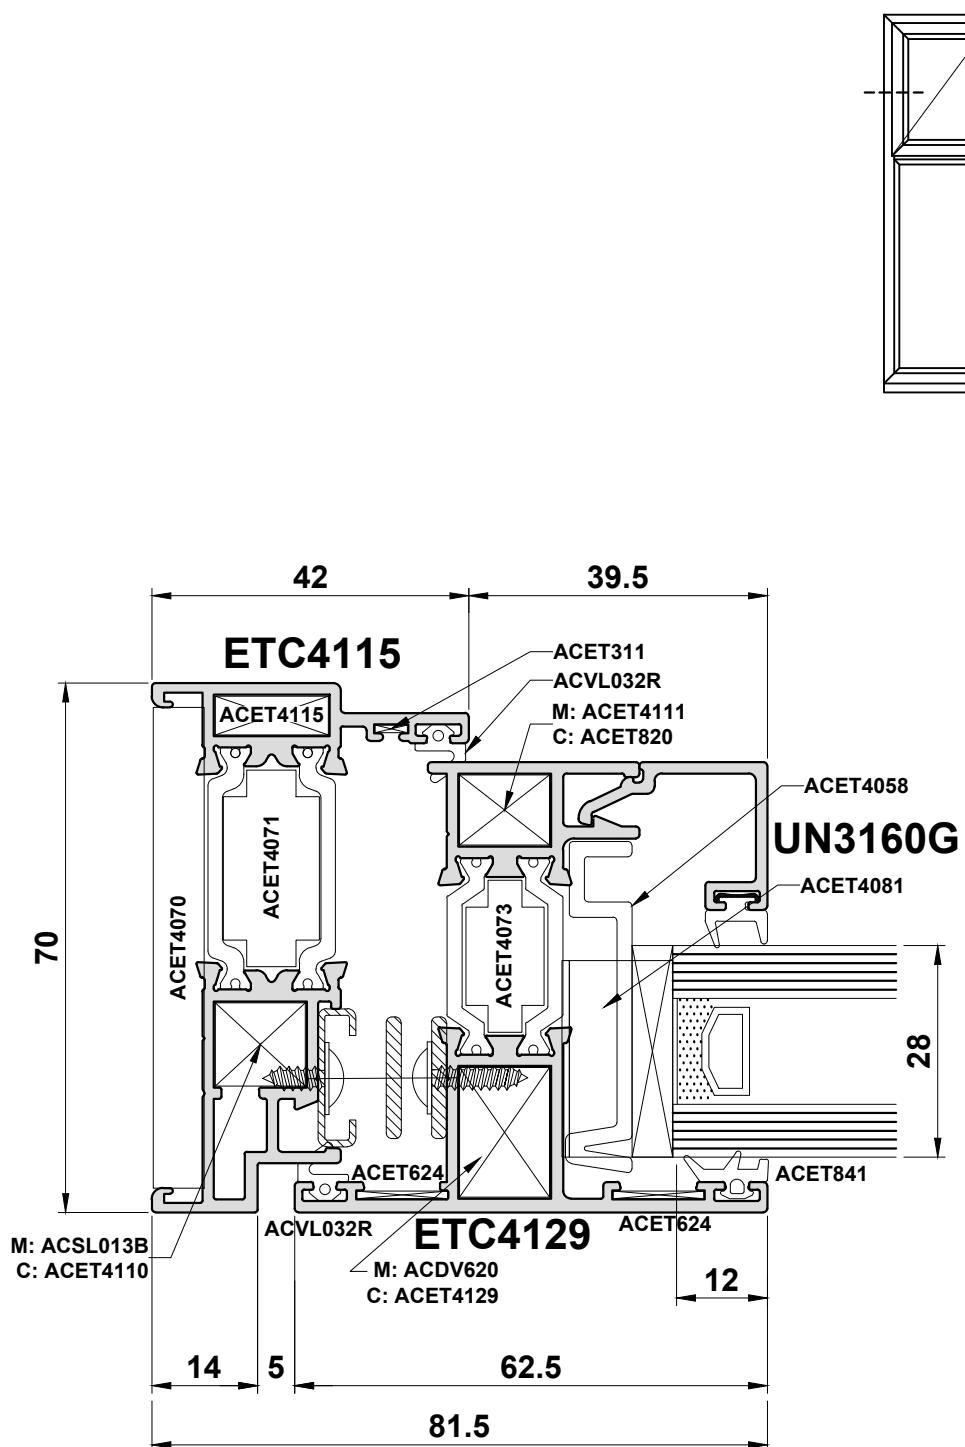Detail 3C





Do Not Scale From This Drawing

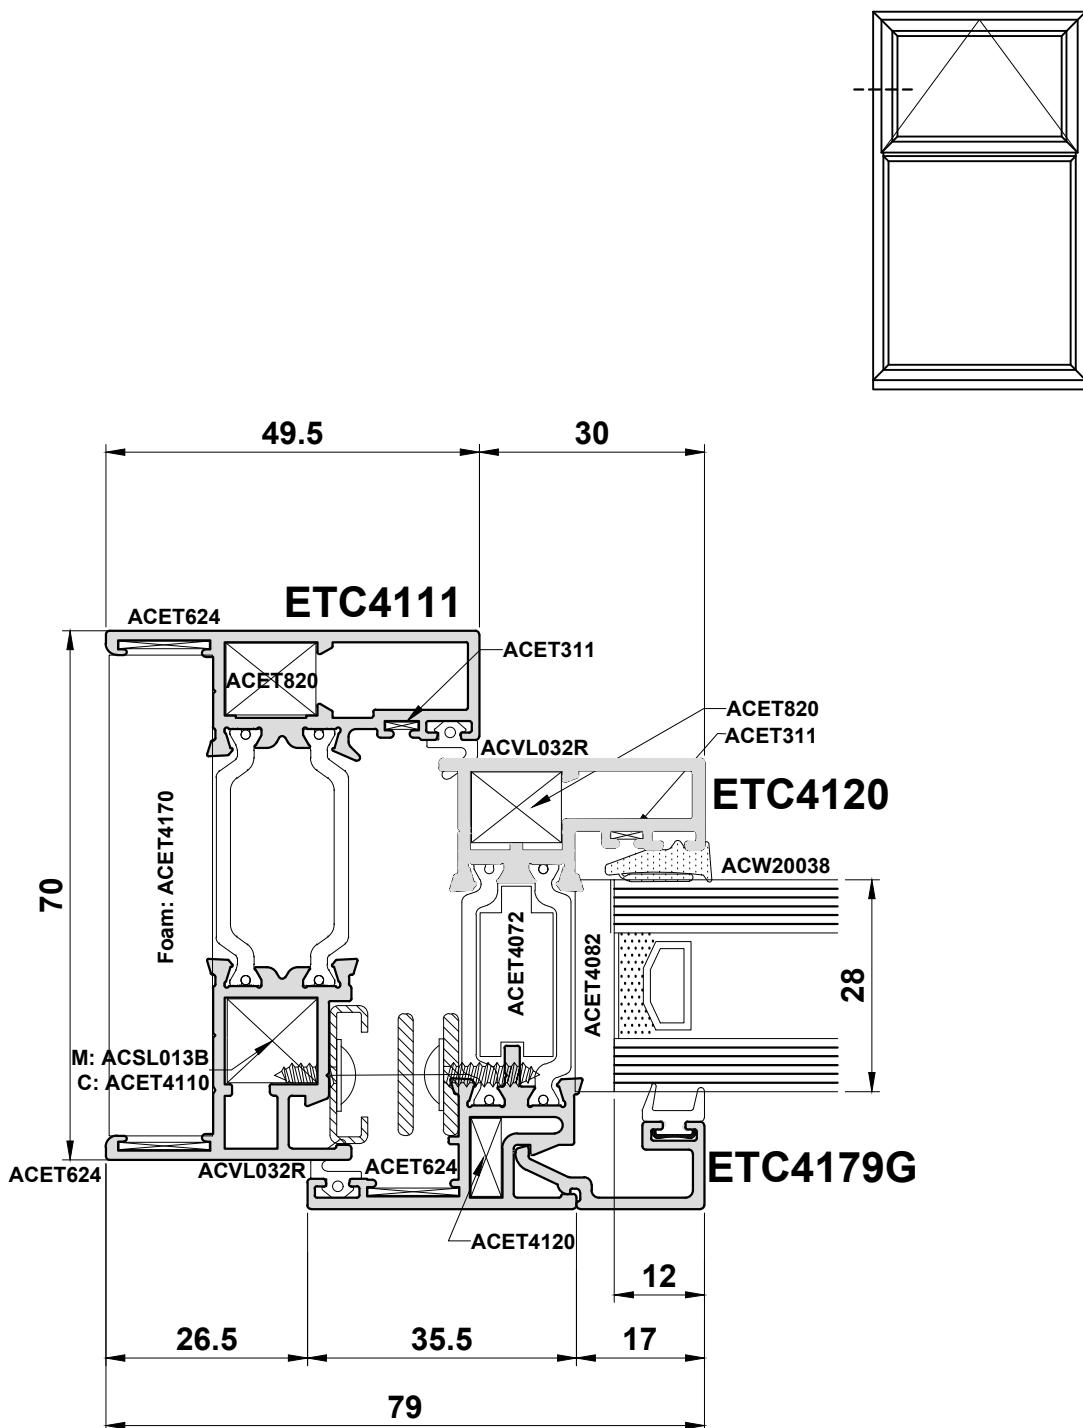Detail 3D




Do Not Scale From This Drawing

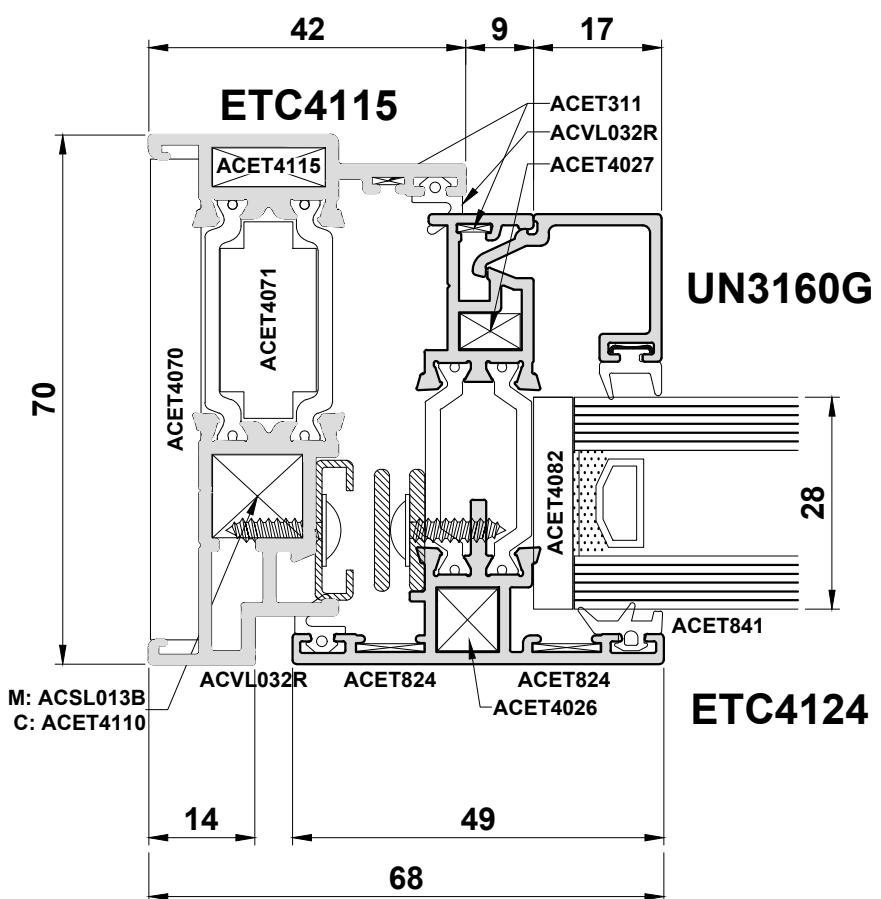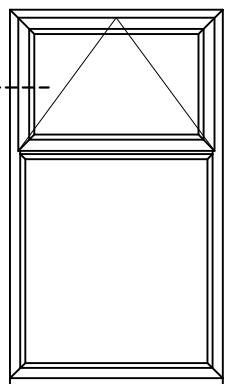Detail 3E




Do Not Scale From This Drawing

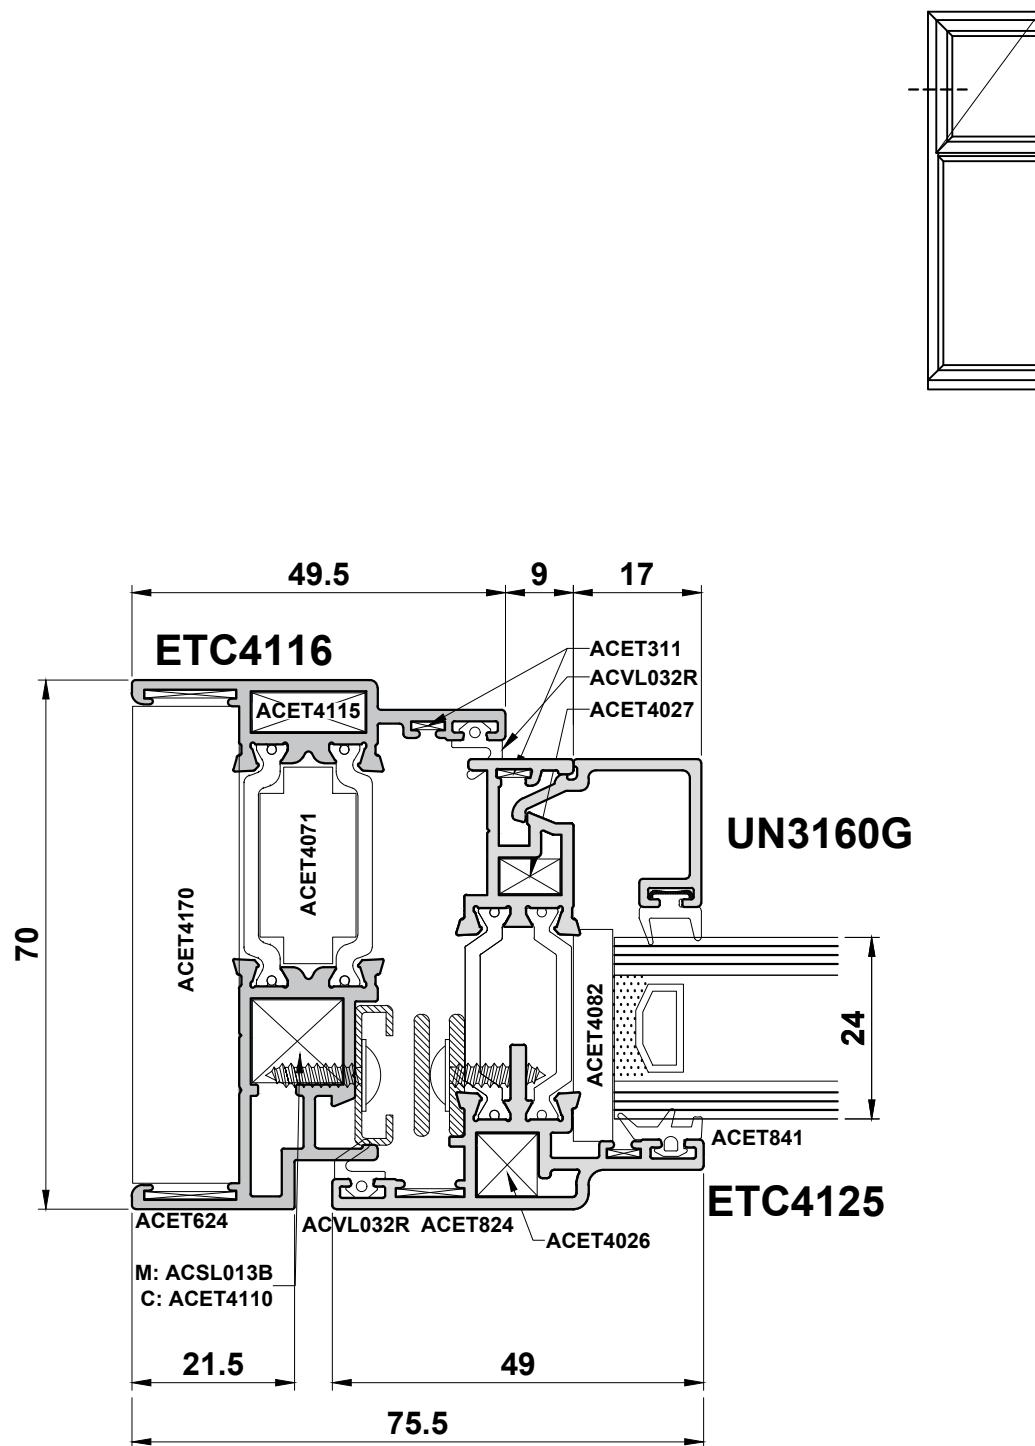Detail 3F




Do Not Scale From This Drawing

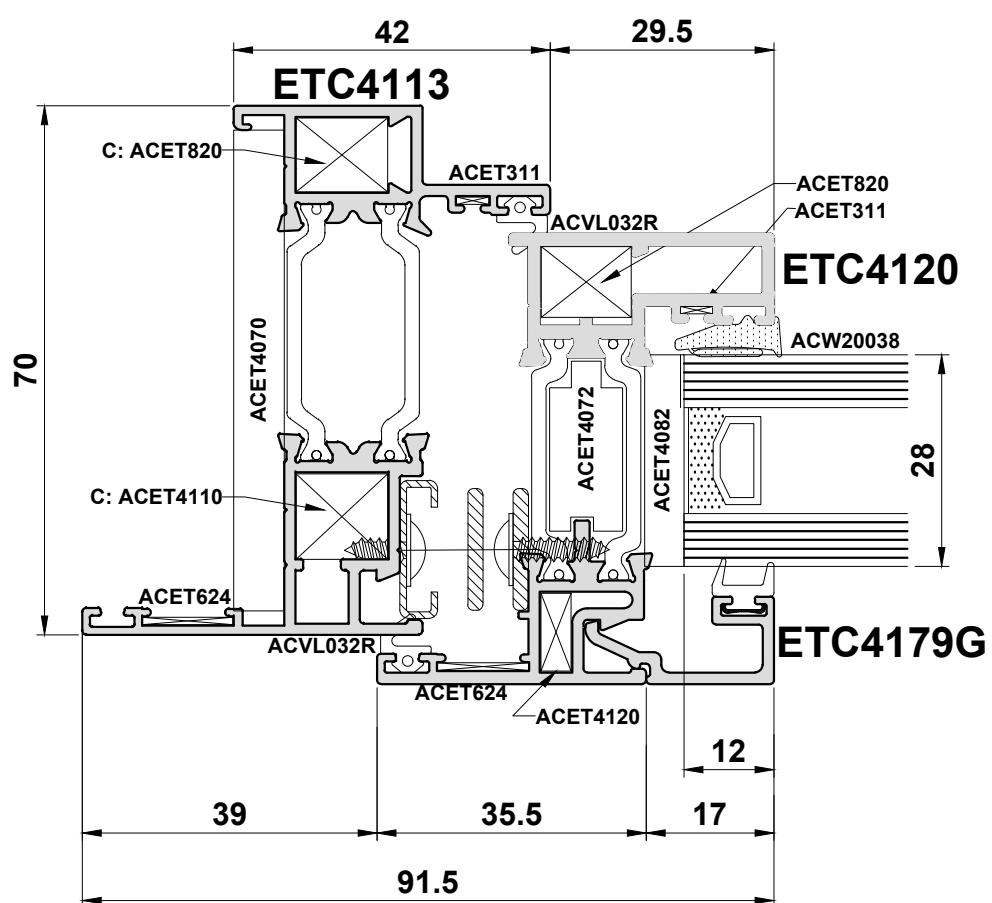Detail 3G




Do Not Scale From This Drawing

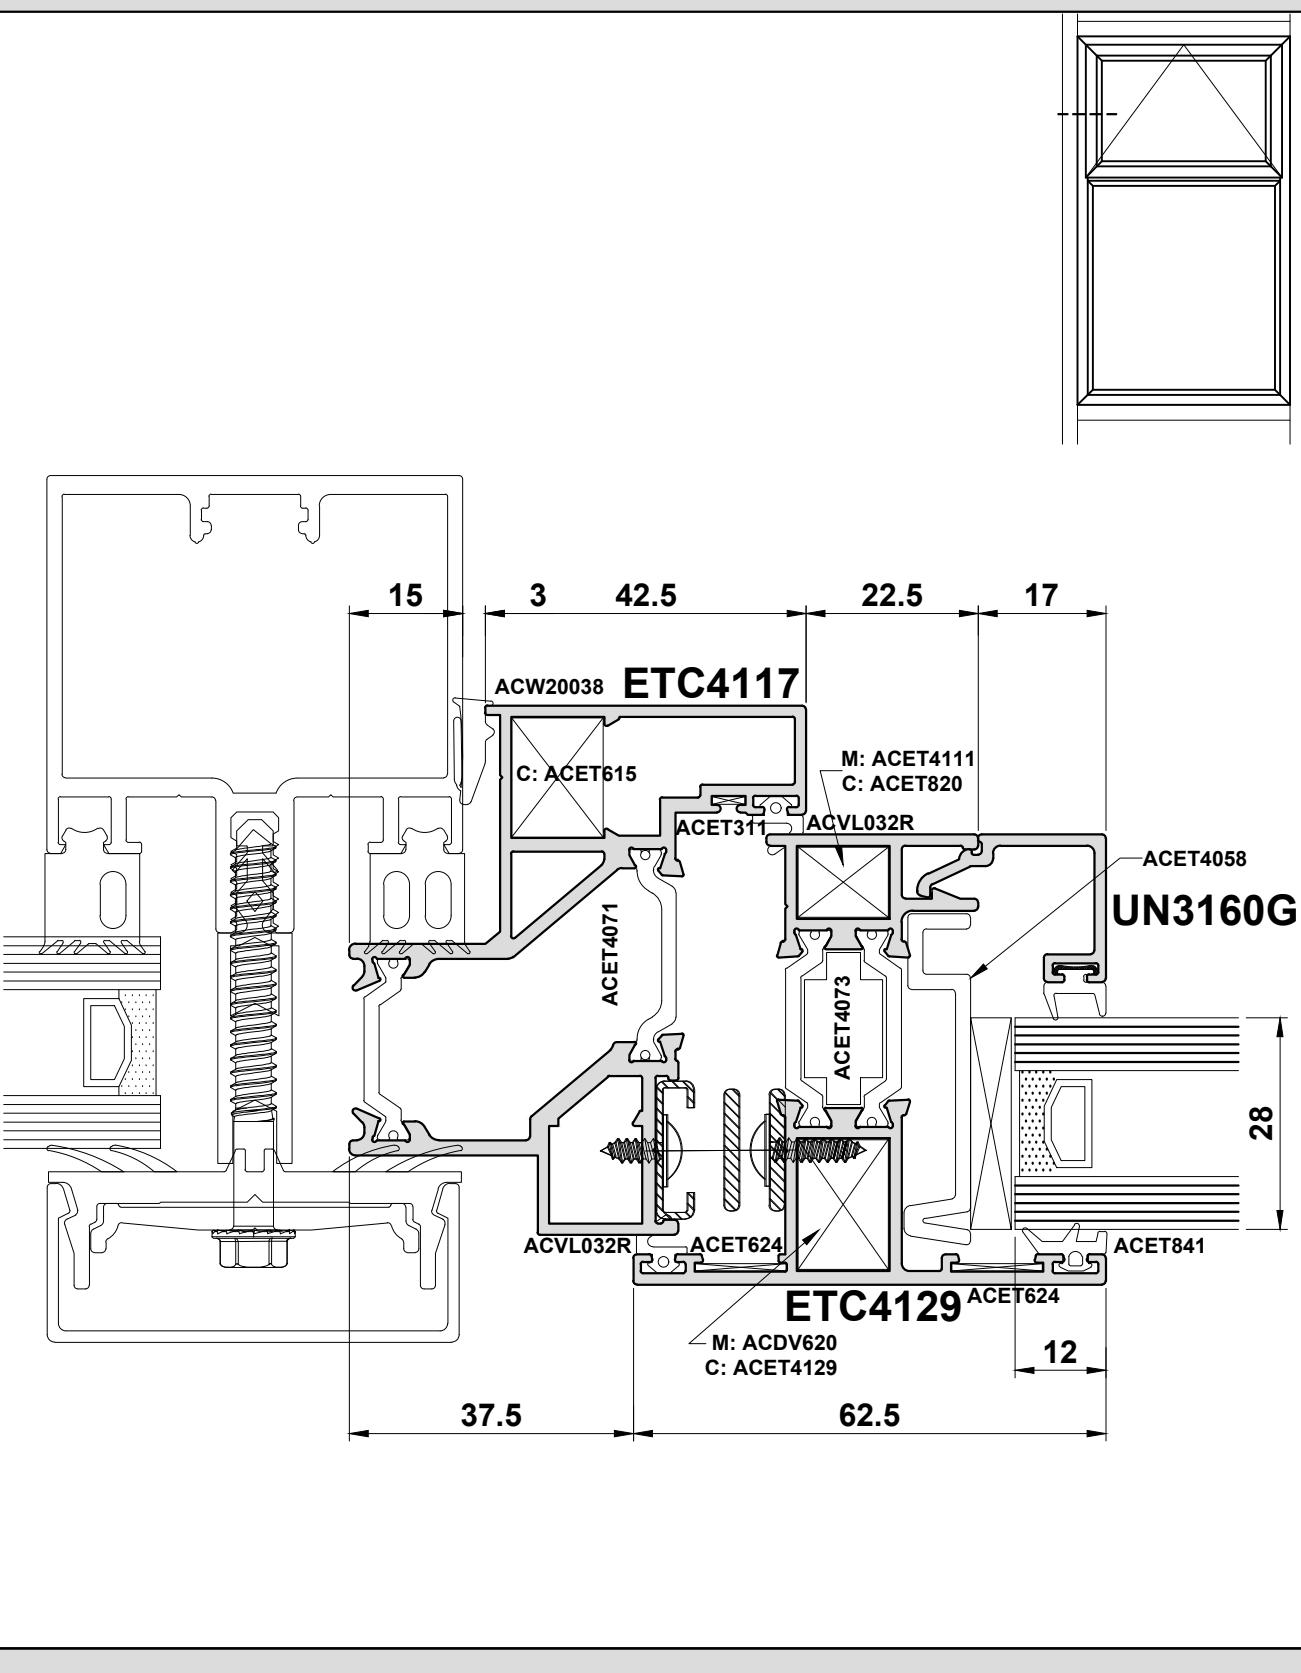Detail 3H




Do Not Scale From This Drawing

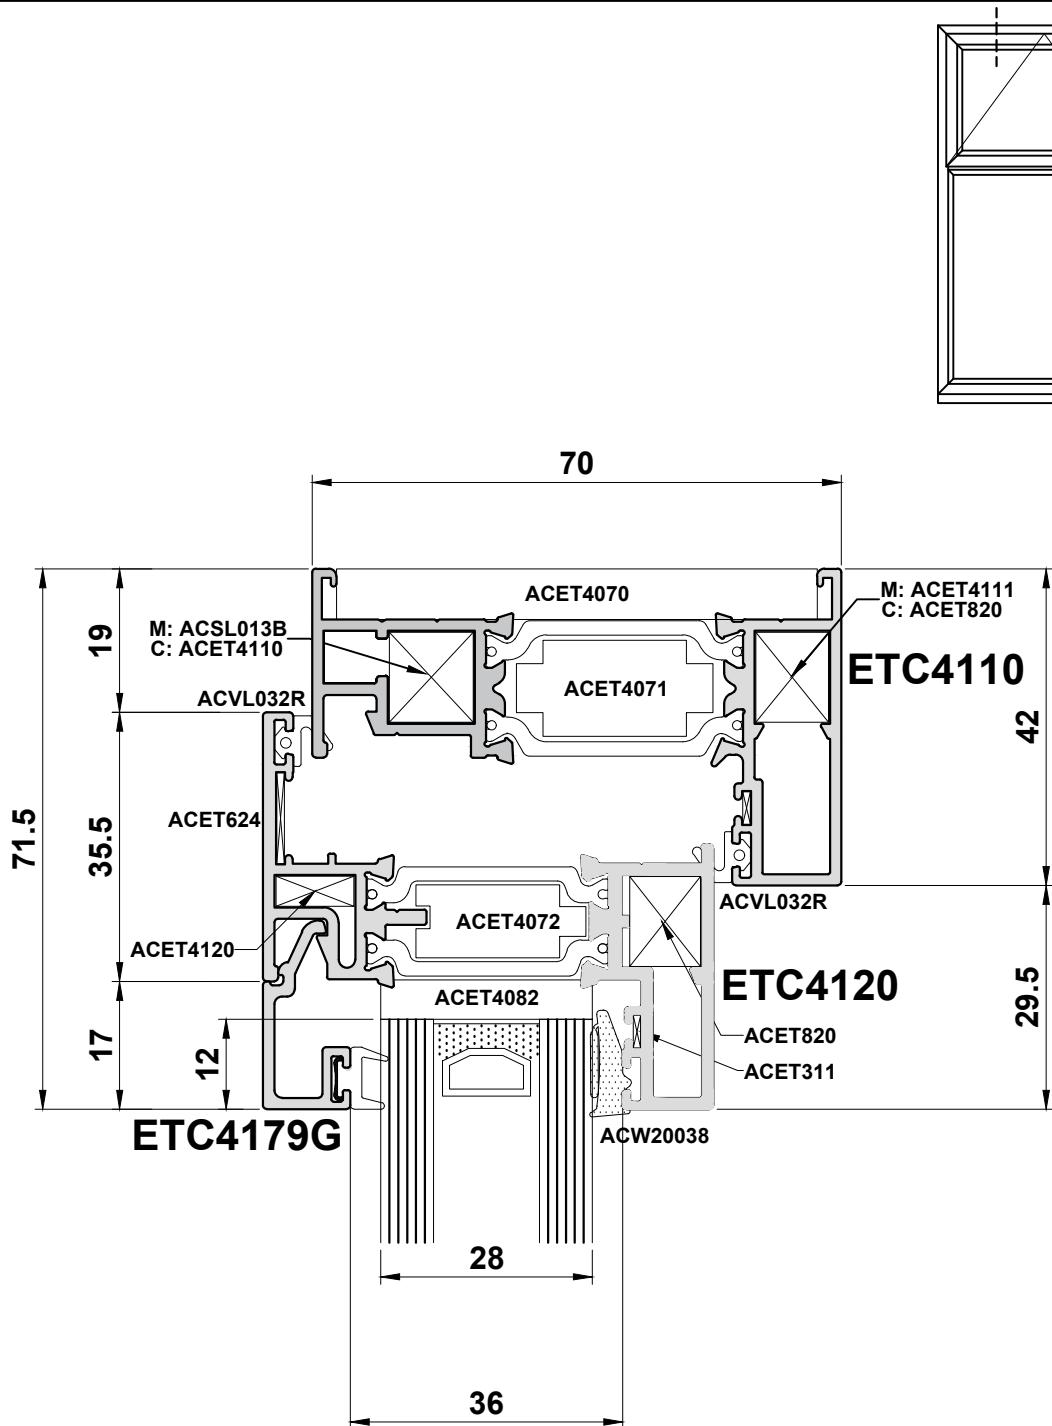Detail 4A




Do Not Scale From This Drawing

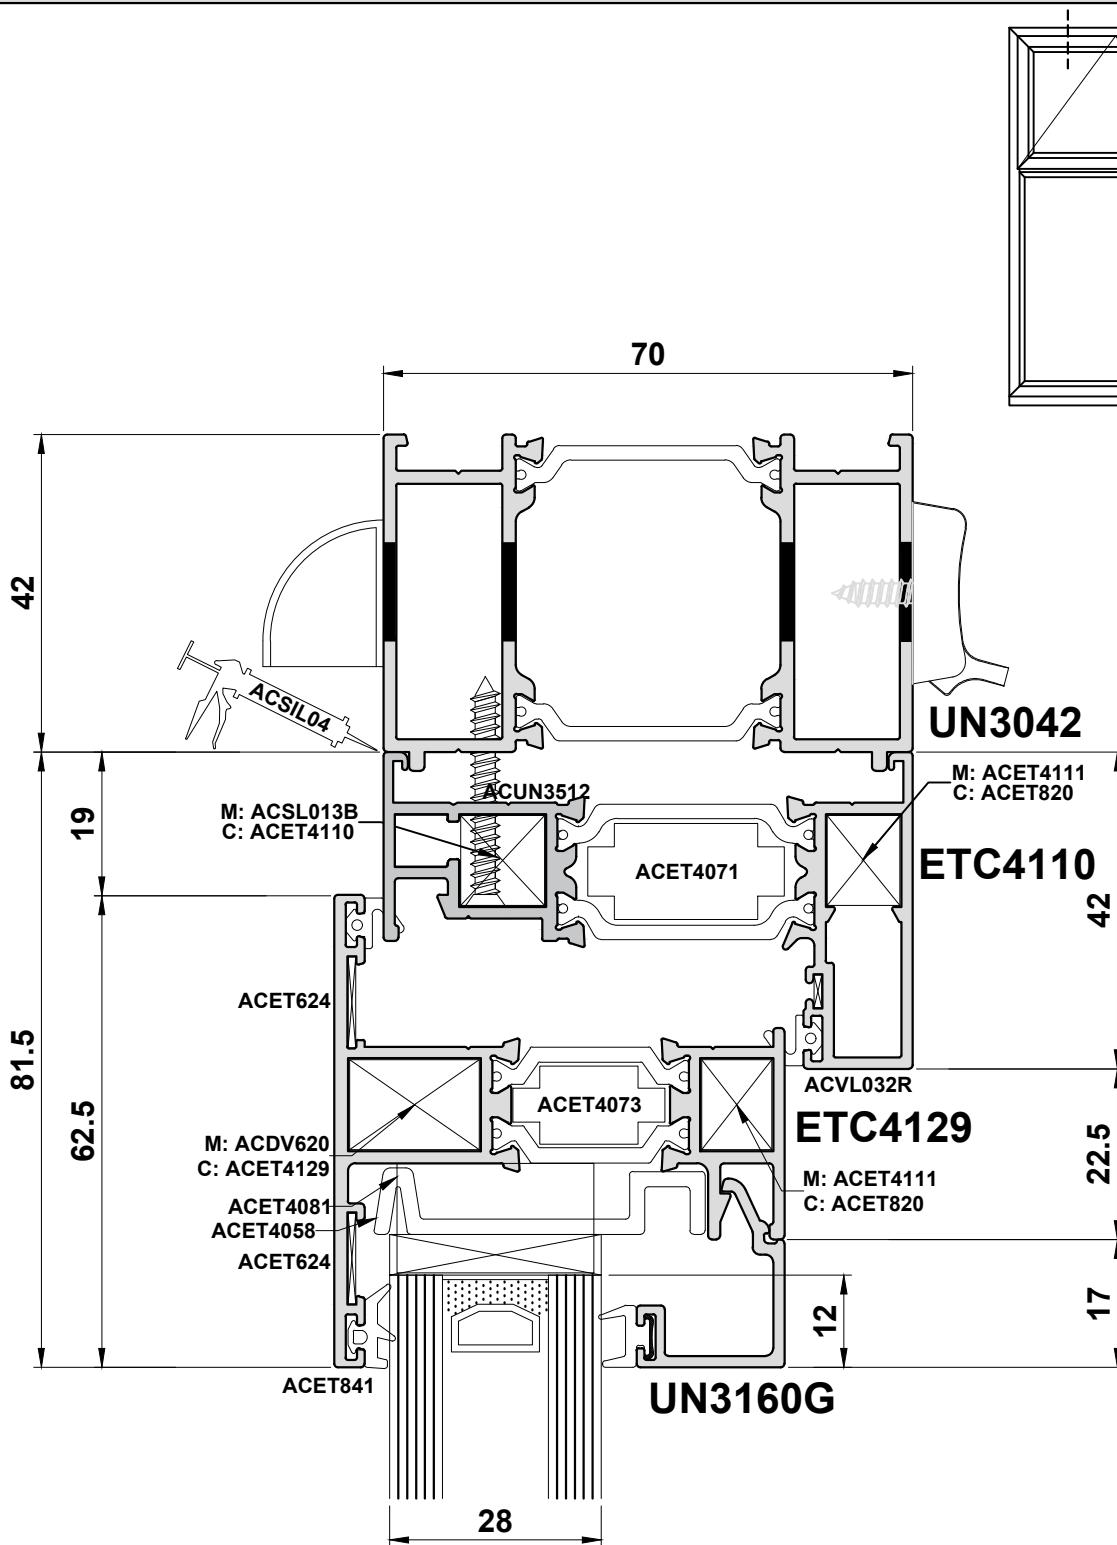Detail 4B




Do Not Scale From This Drawing

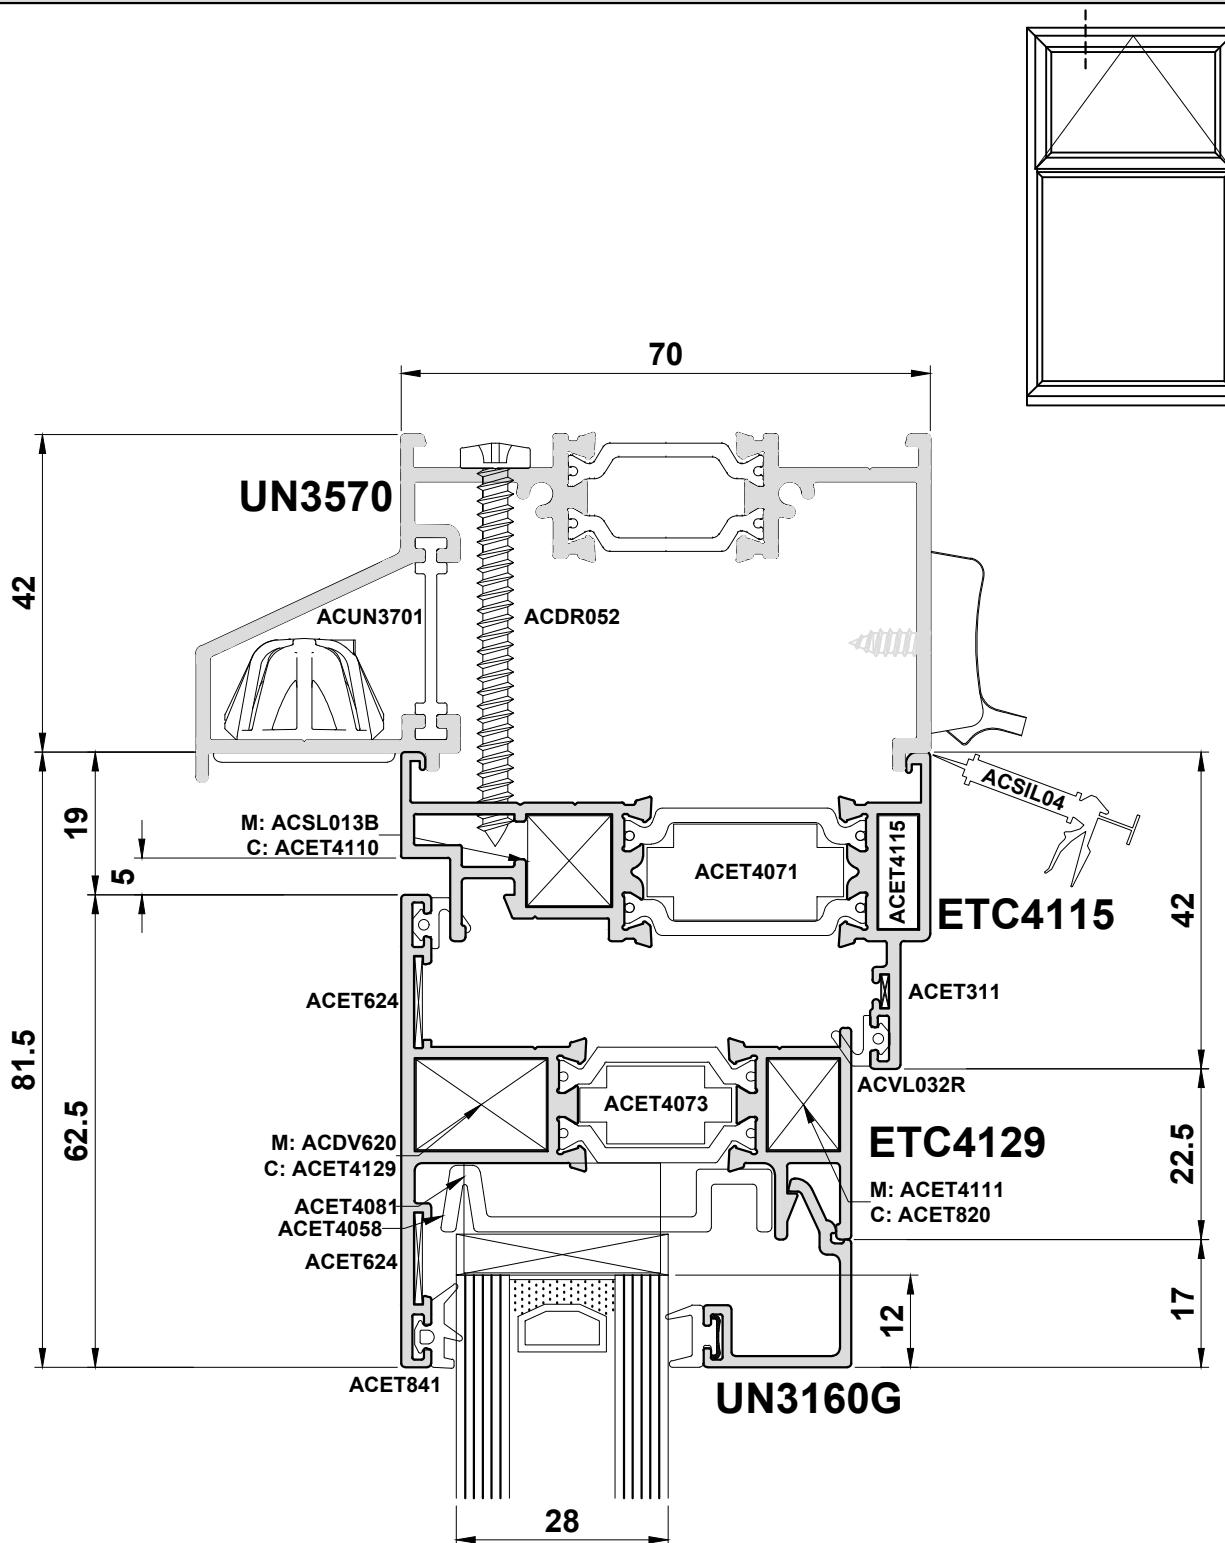Detail 4C




Do Not Scale From This Drawing

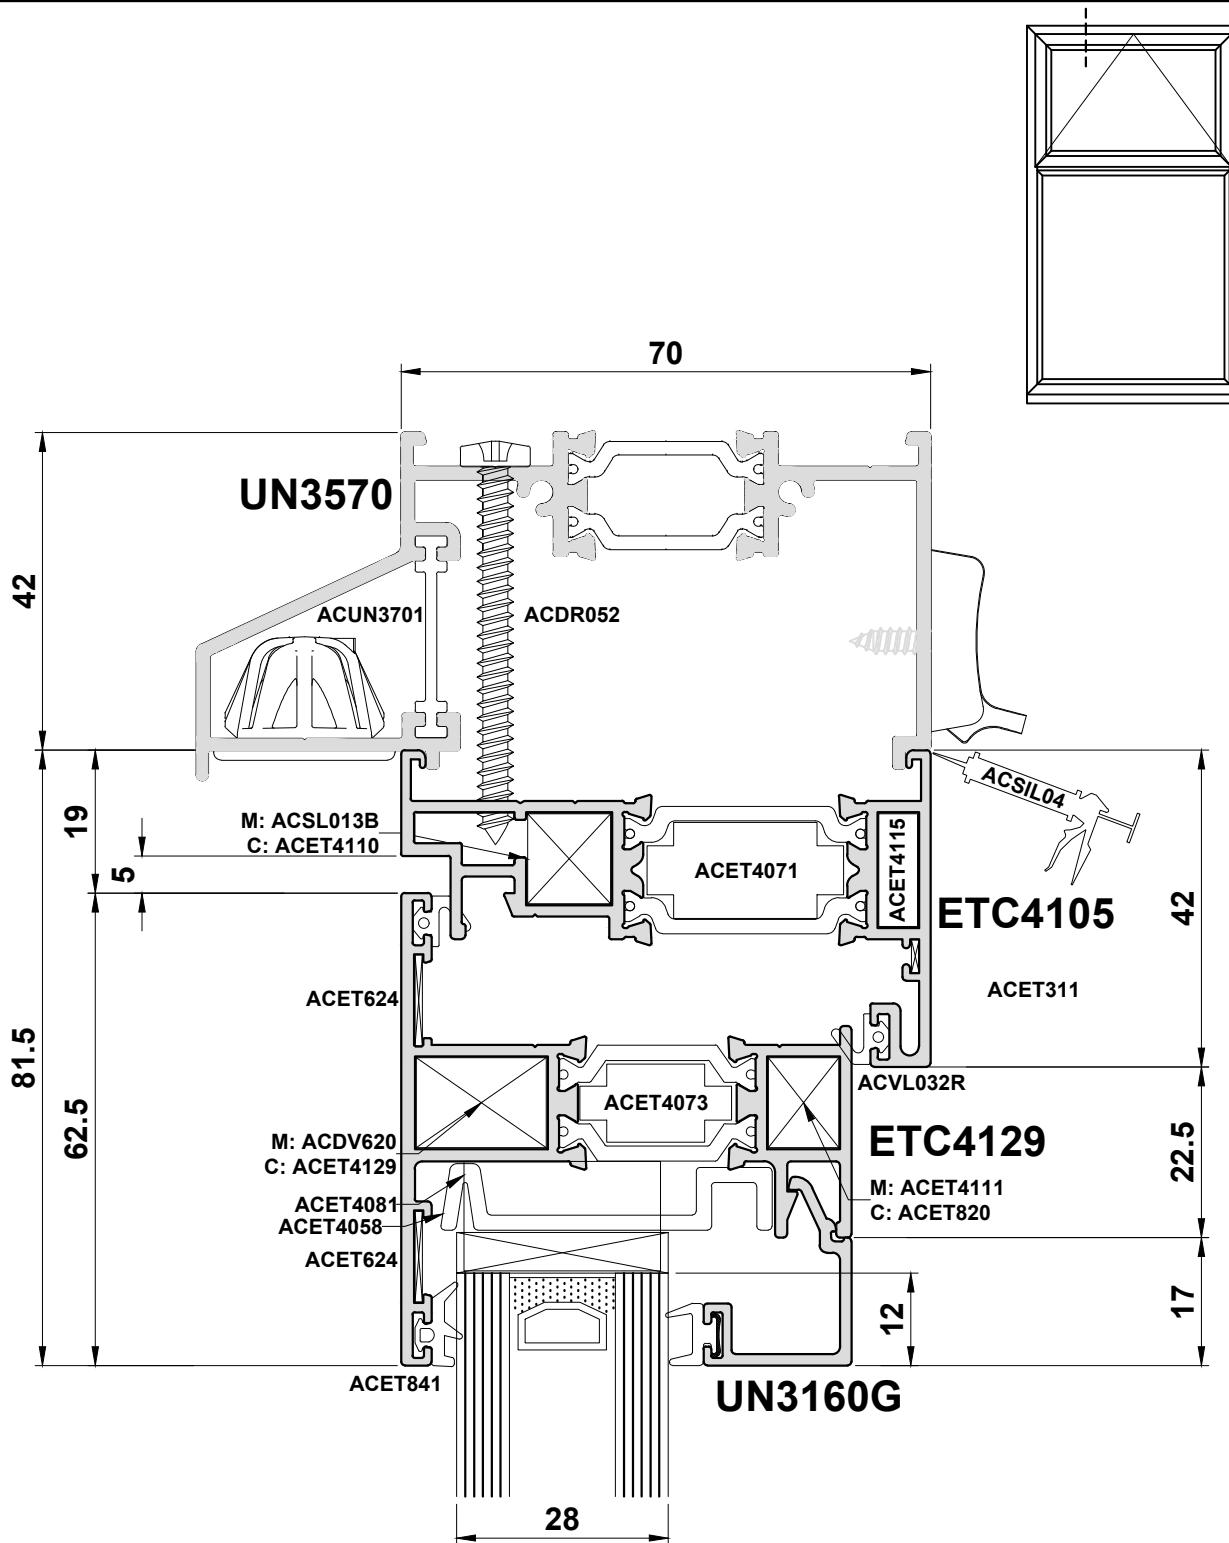Detail 4????




Do Not Scale From This Drawing

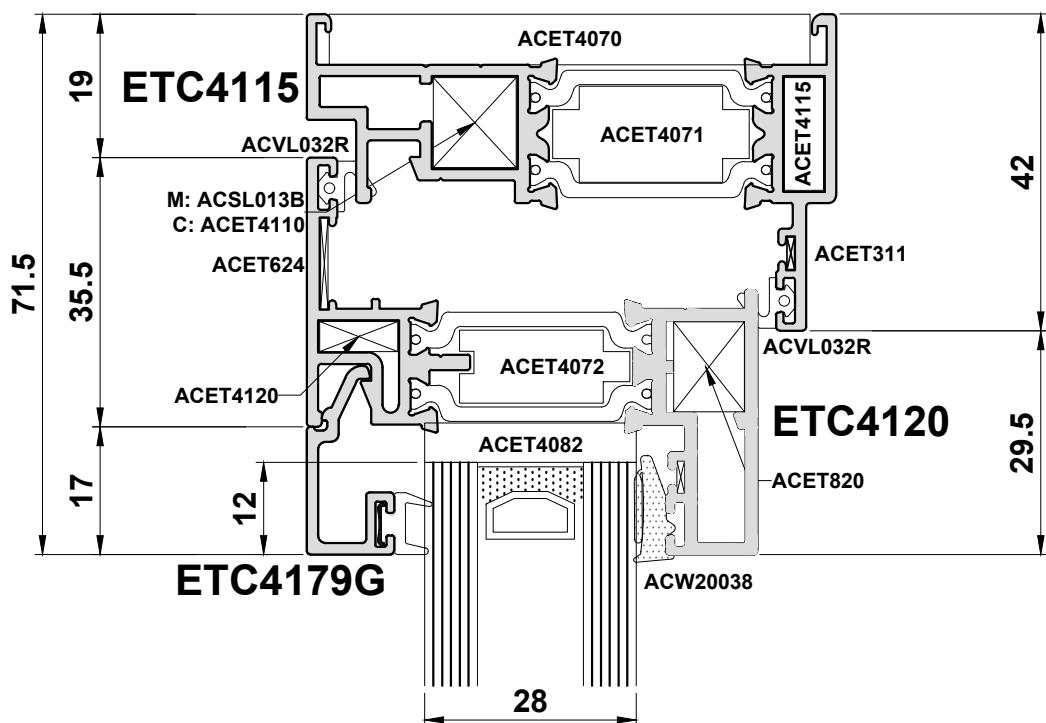Detail 4D




Do Not Scale From This Drawing

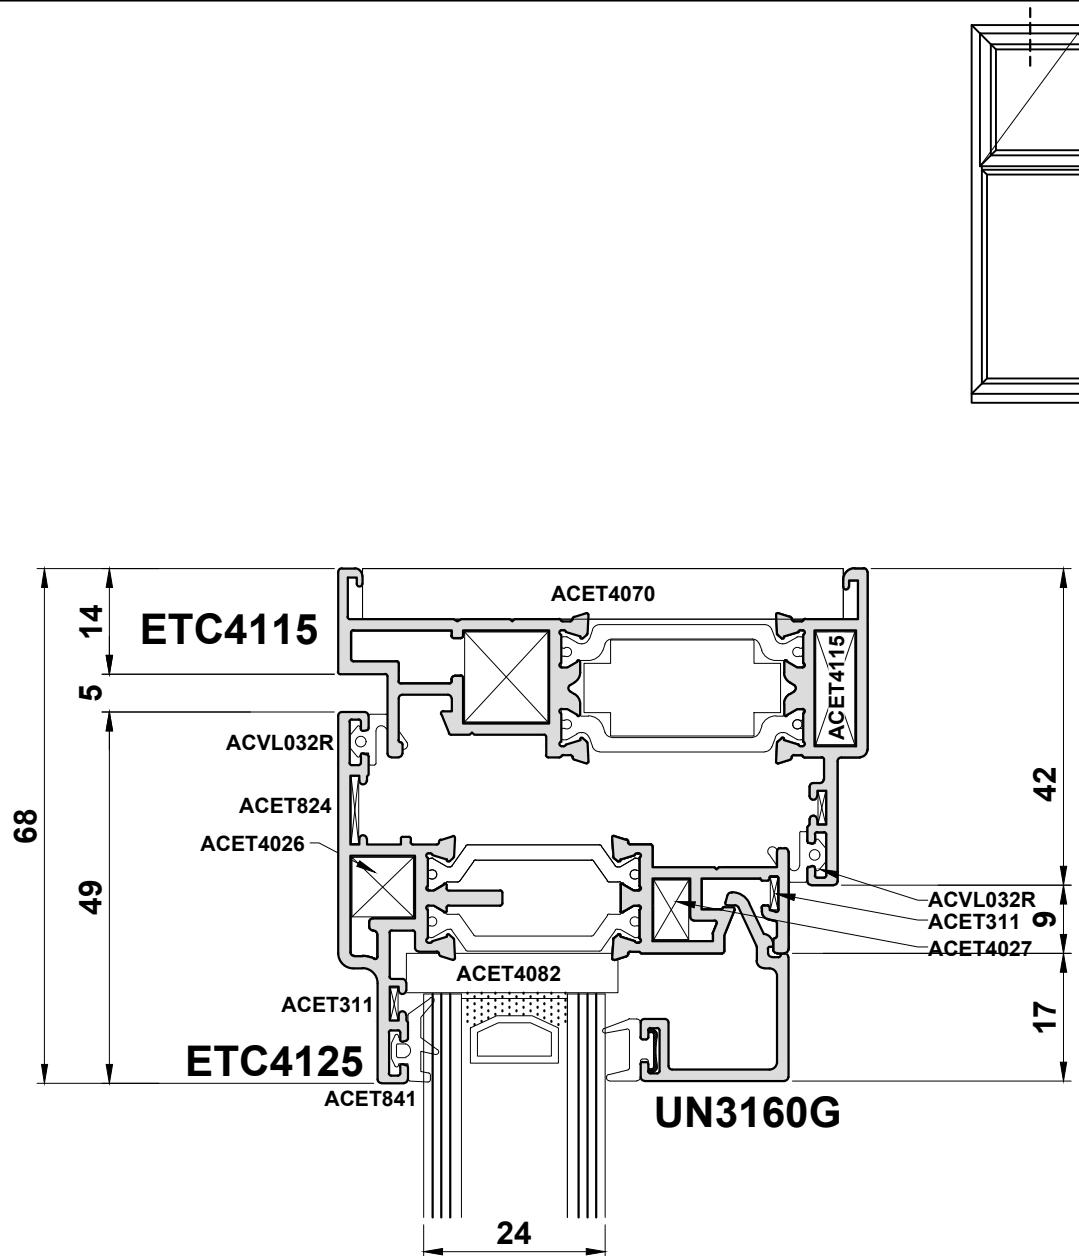Detail 4E



Do Not Scale From This Drawing

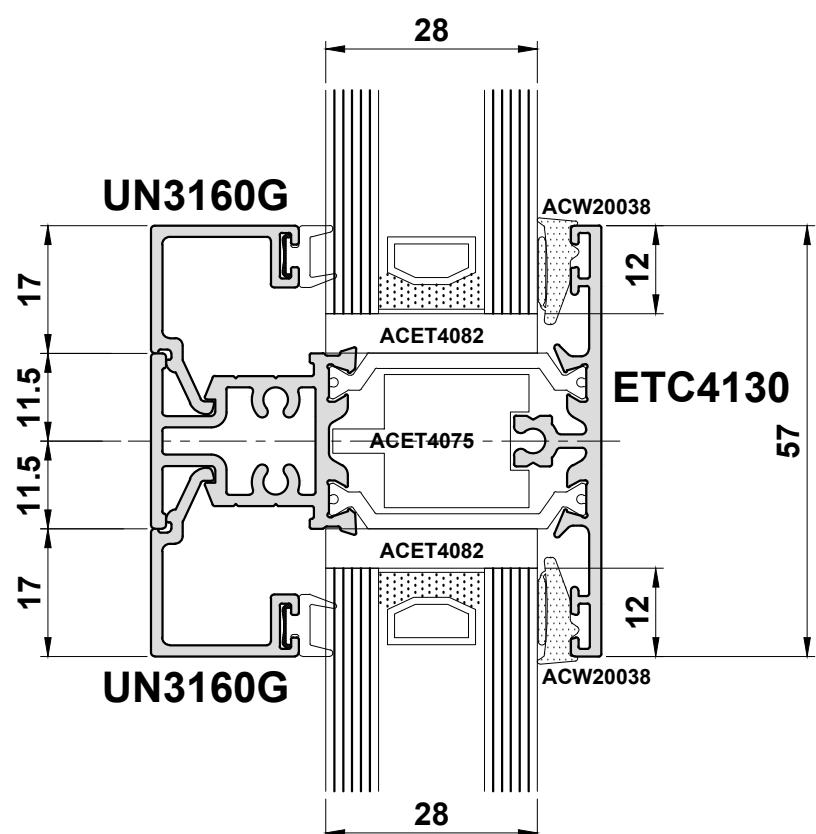
Detail 5A



Note: Transoms will drain through the join to the outerframe.

Do Not Scale From This Drawing


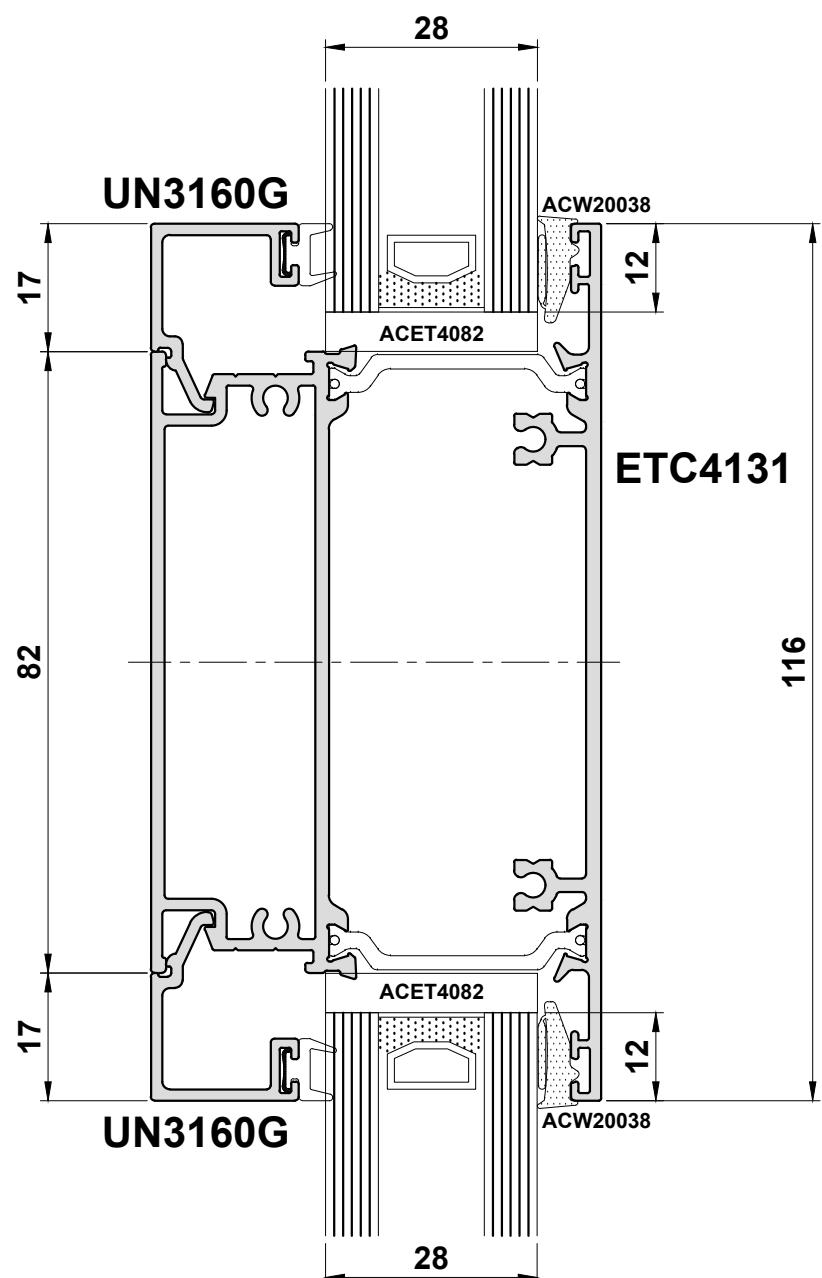
Detail 5B



Note: Transoms will drain through the join to the outerframe.

Do Not Scale From This Drawing

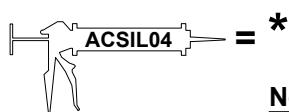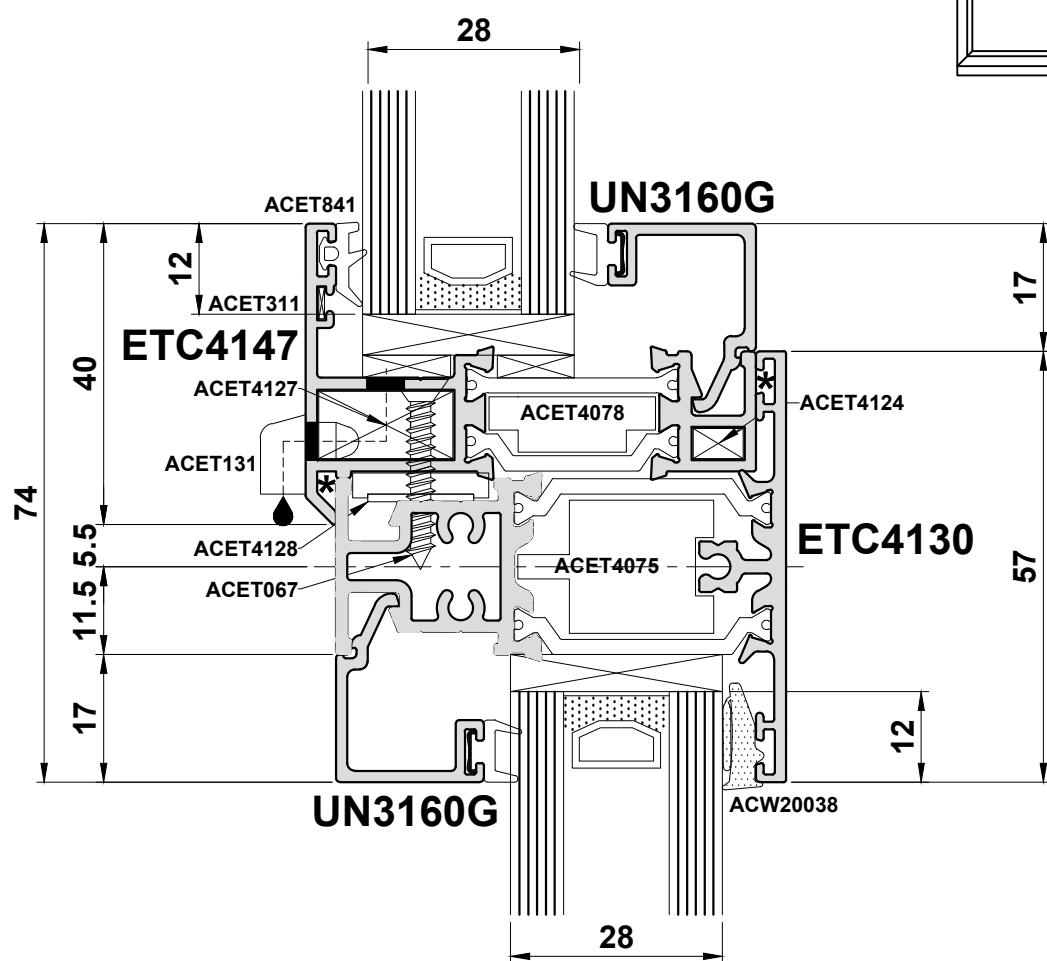
Detail 5C



Note: Transoms will drain through the join to the outerframe.

Do Not Scale From This Drawing

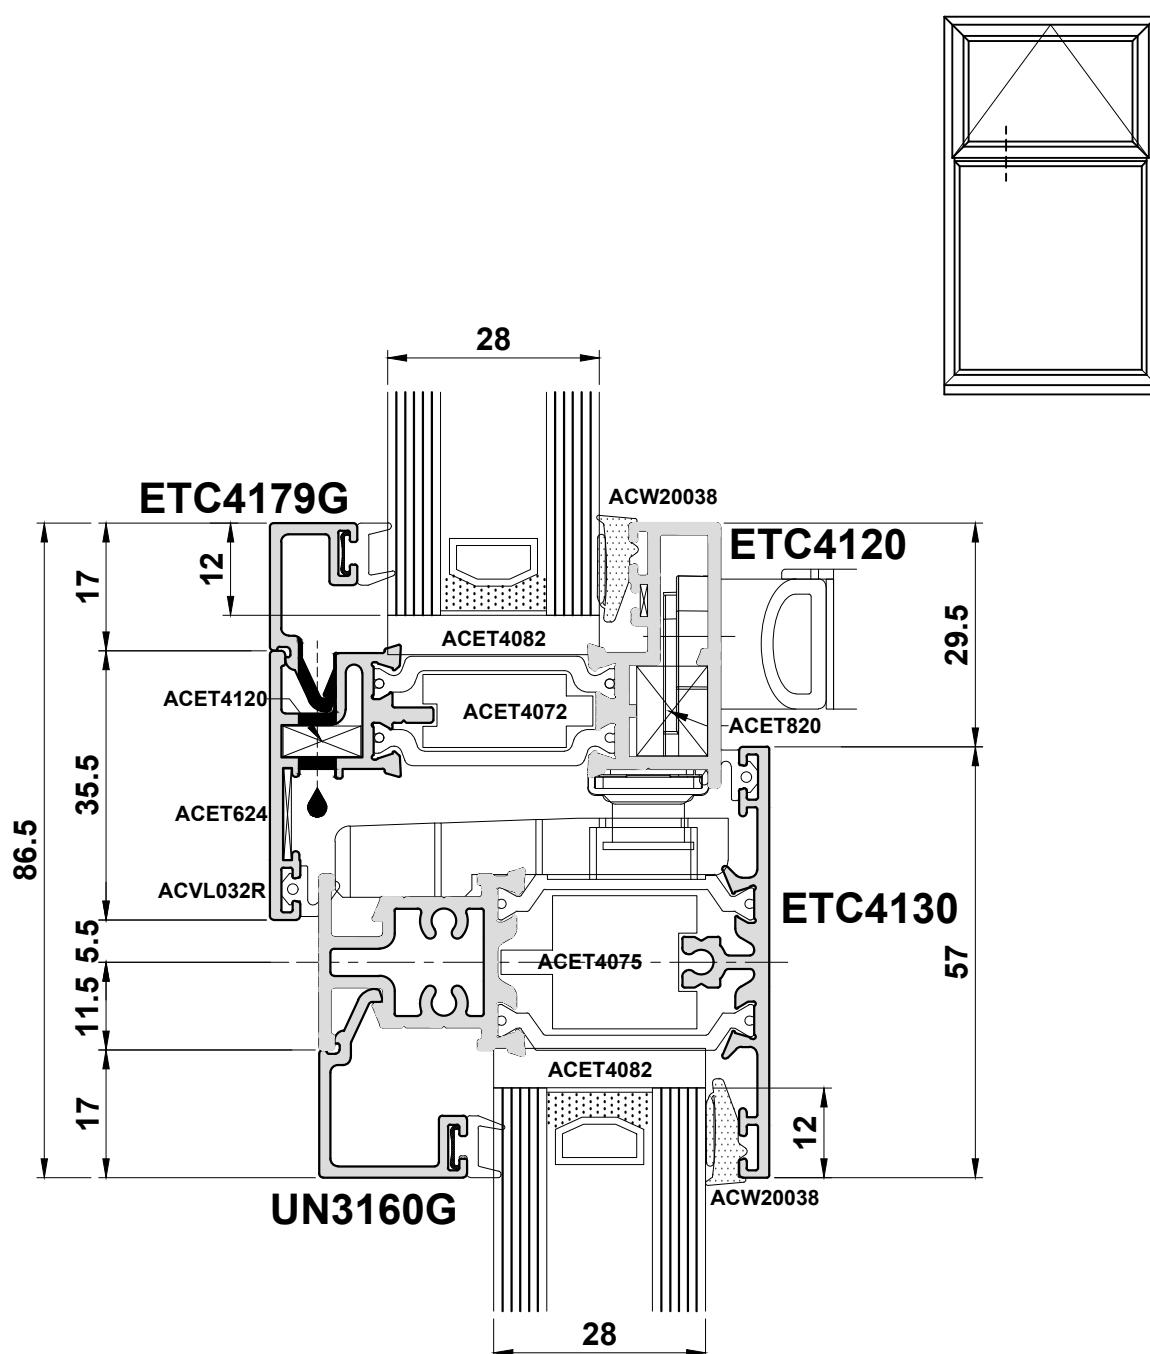
Detail 6A



Note: Transoms will drain through the join to the outerframe.

Do Not Scale From This Drawing

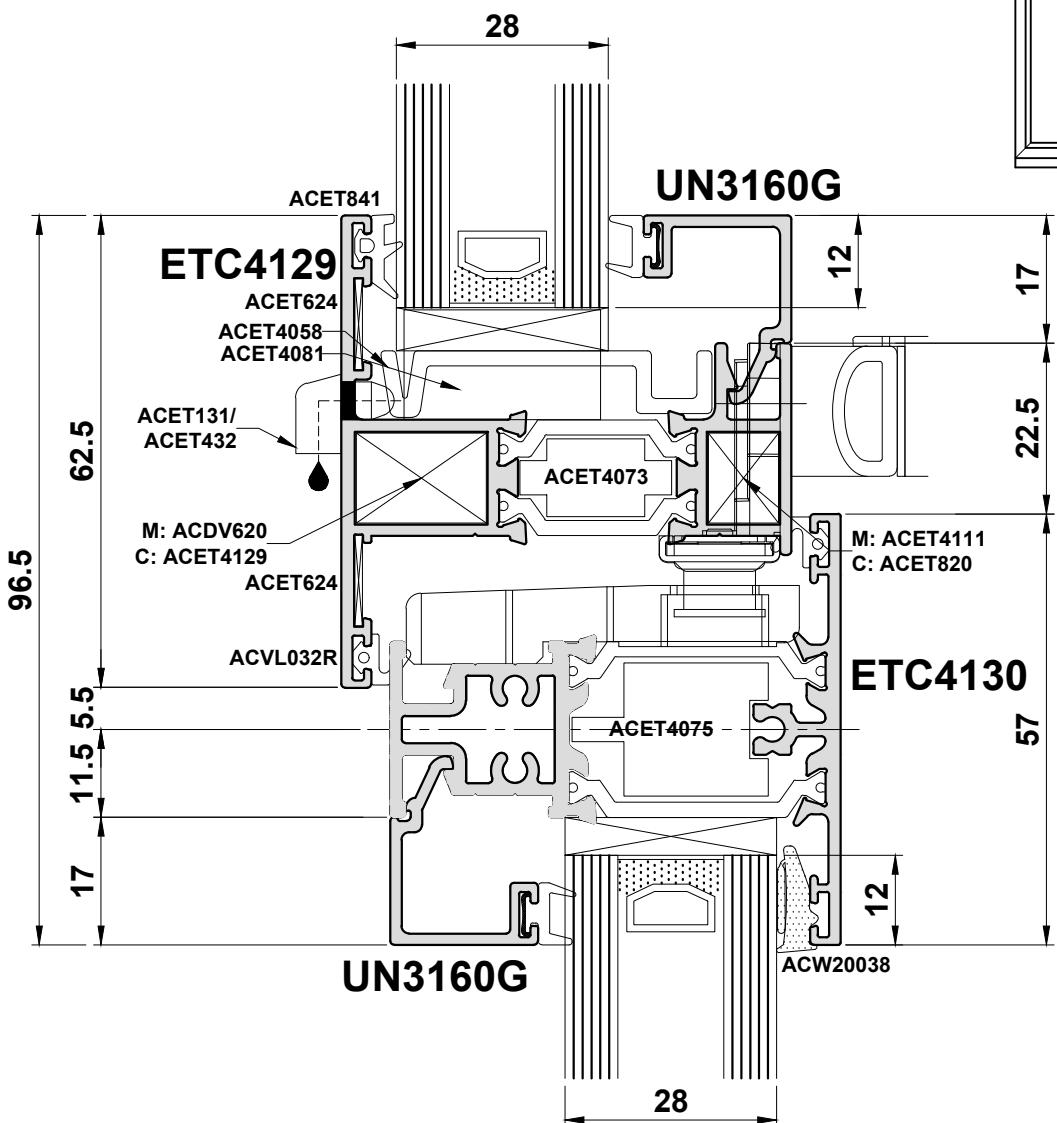
Detail 6B



Note: Transoms will drain through the join to the outerframe.

Do Not Scale From This Drawing

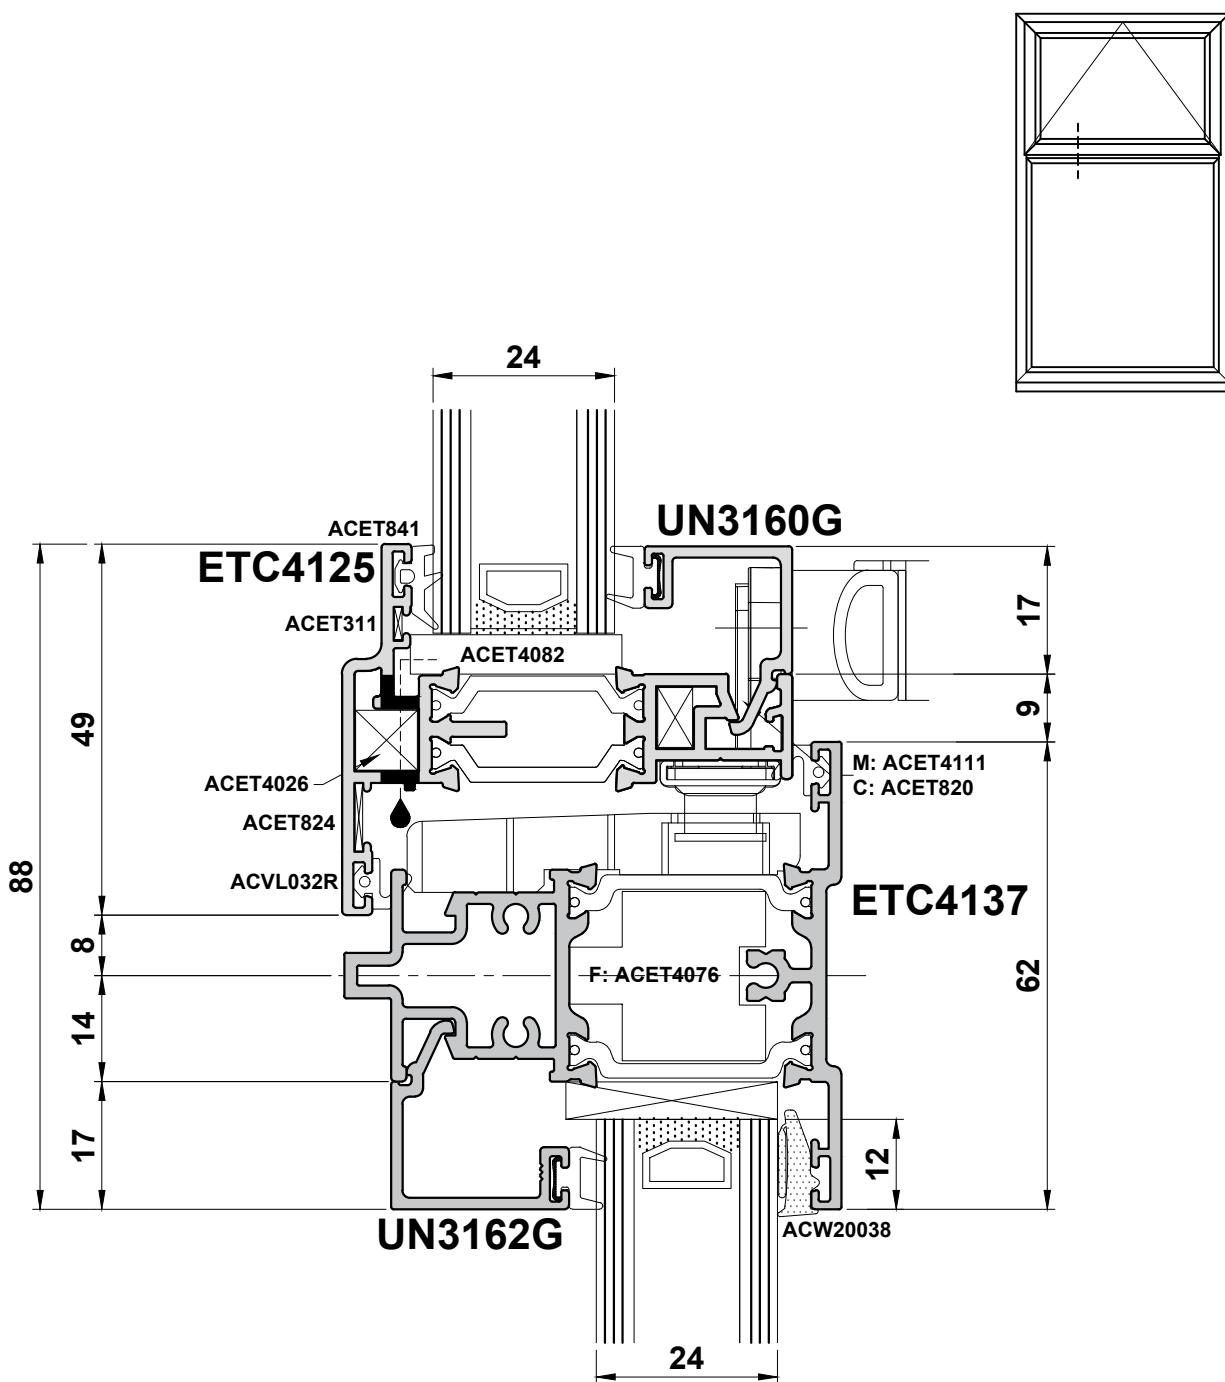
Detail 6C



Note: Transoms will drain through the join to the outerframe.


Do Not Scale From This Drawing

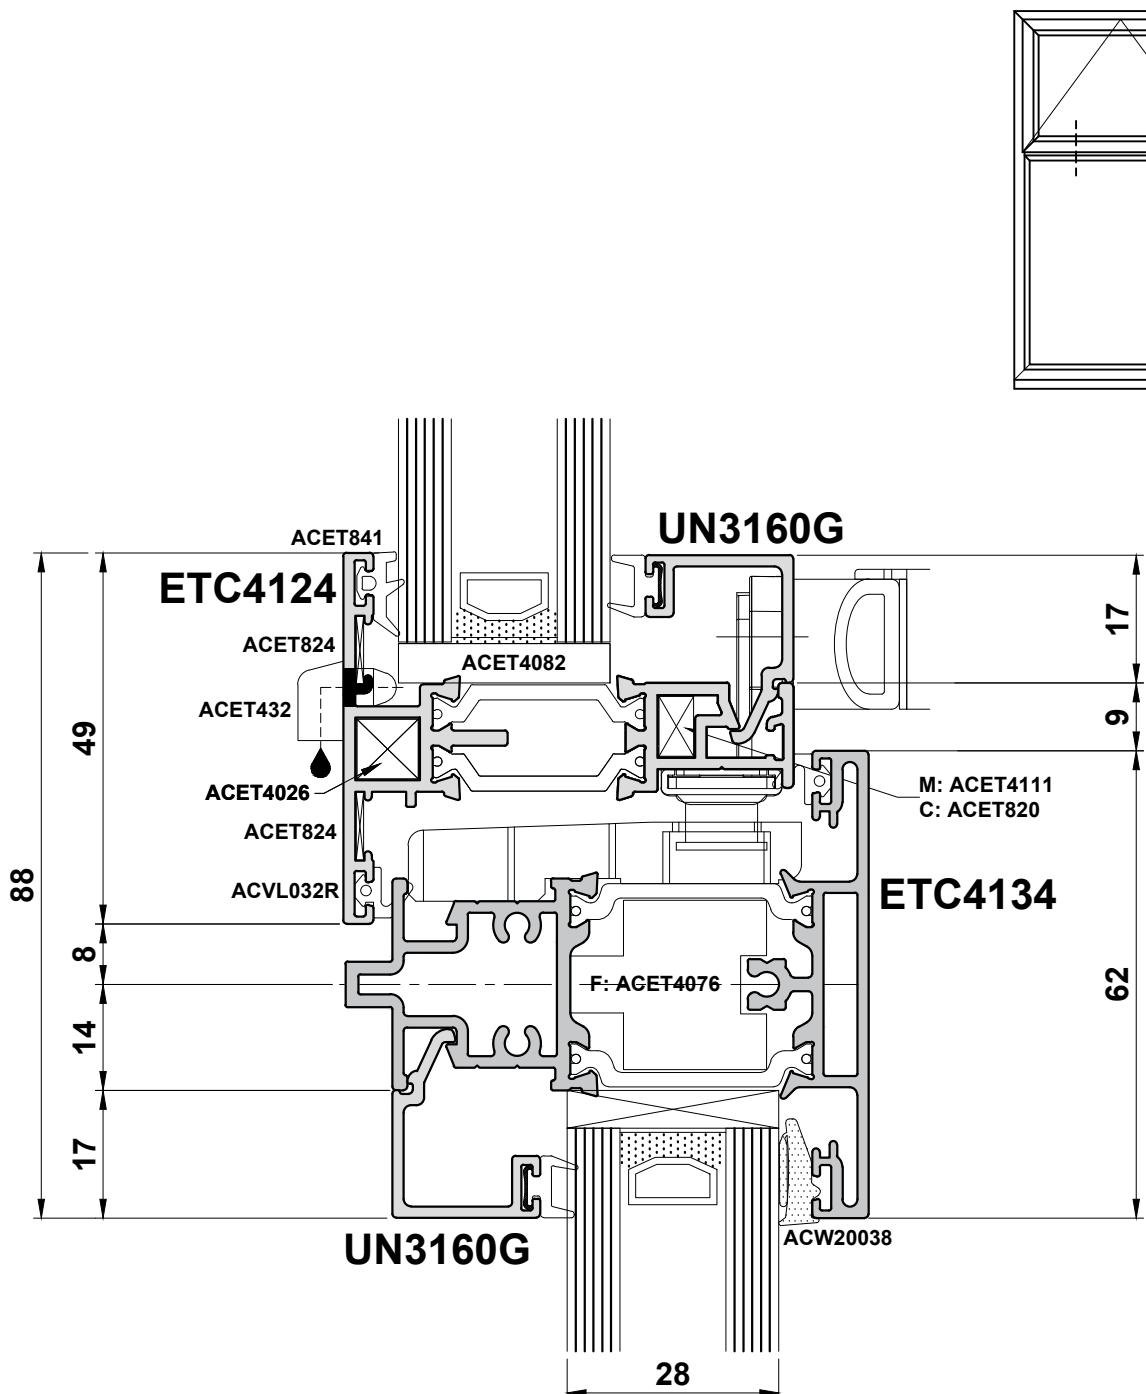Detail 6D




Do Not Scale From This Drawing

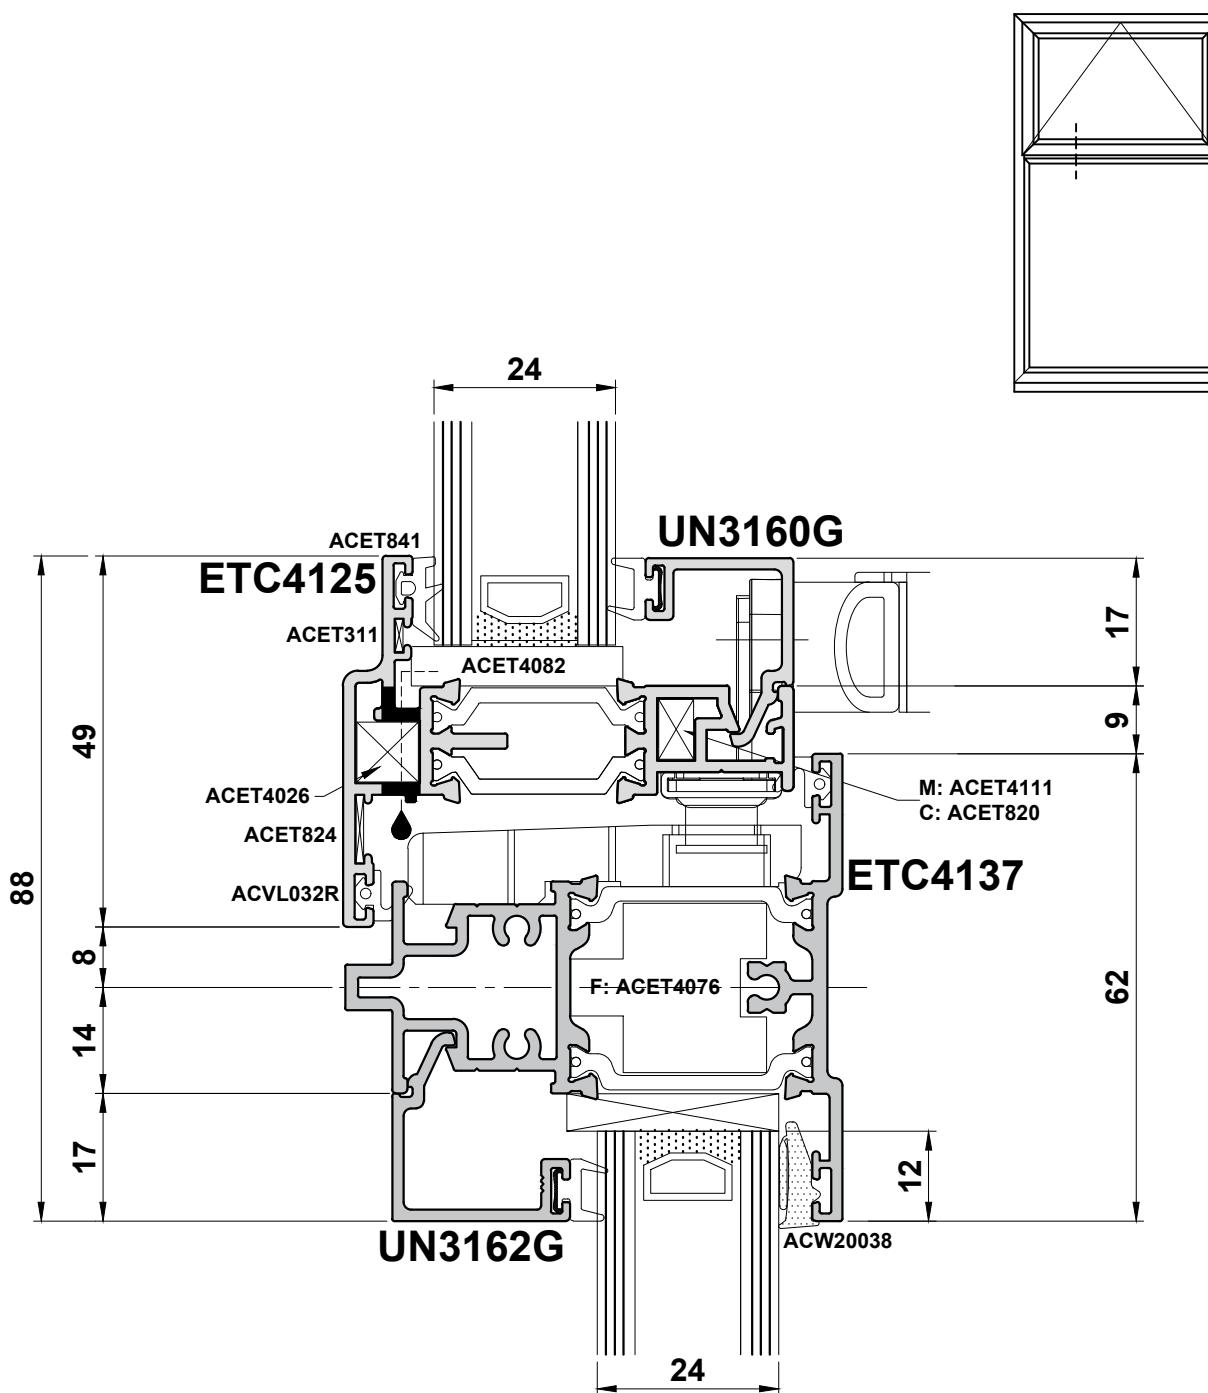Detail 6E




Do Not Scale From This Drawing

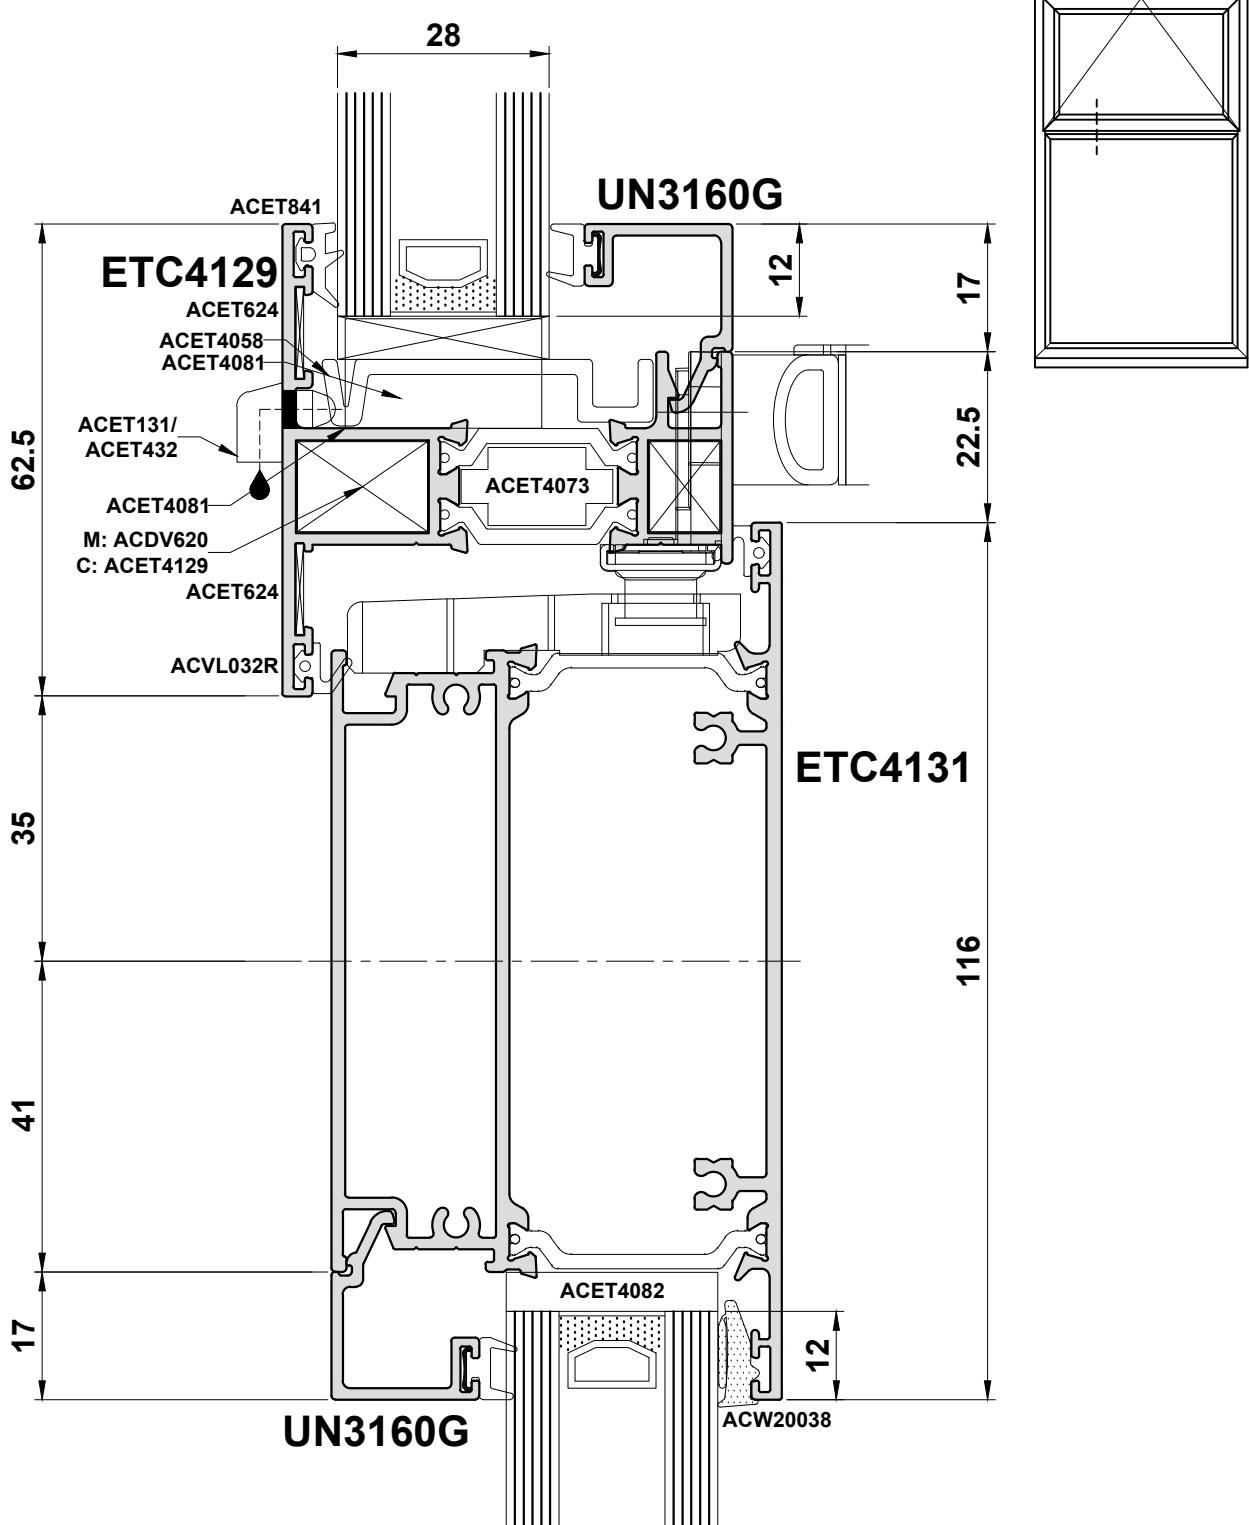Detail 6F




Note: Transoms will drain through the join to the outerframe.

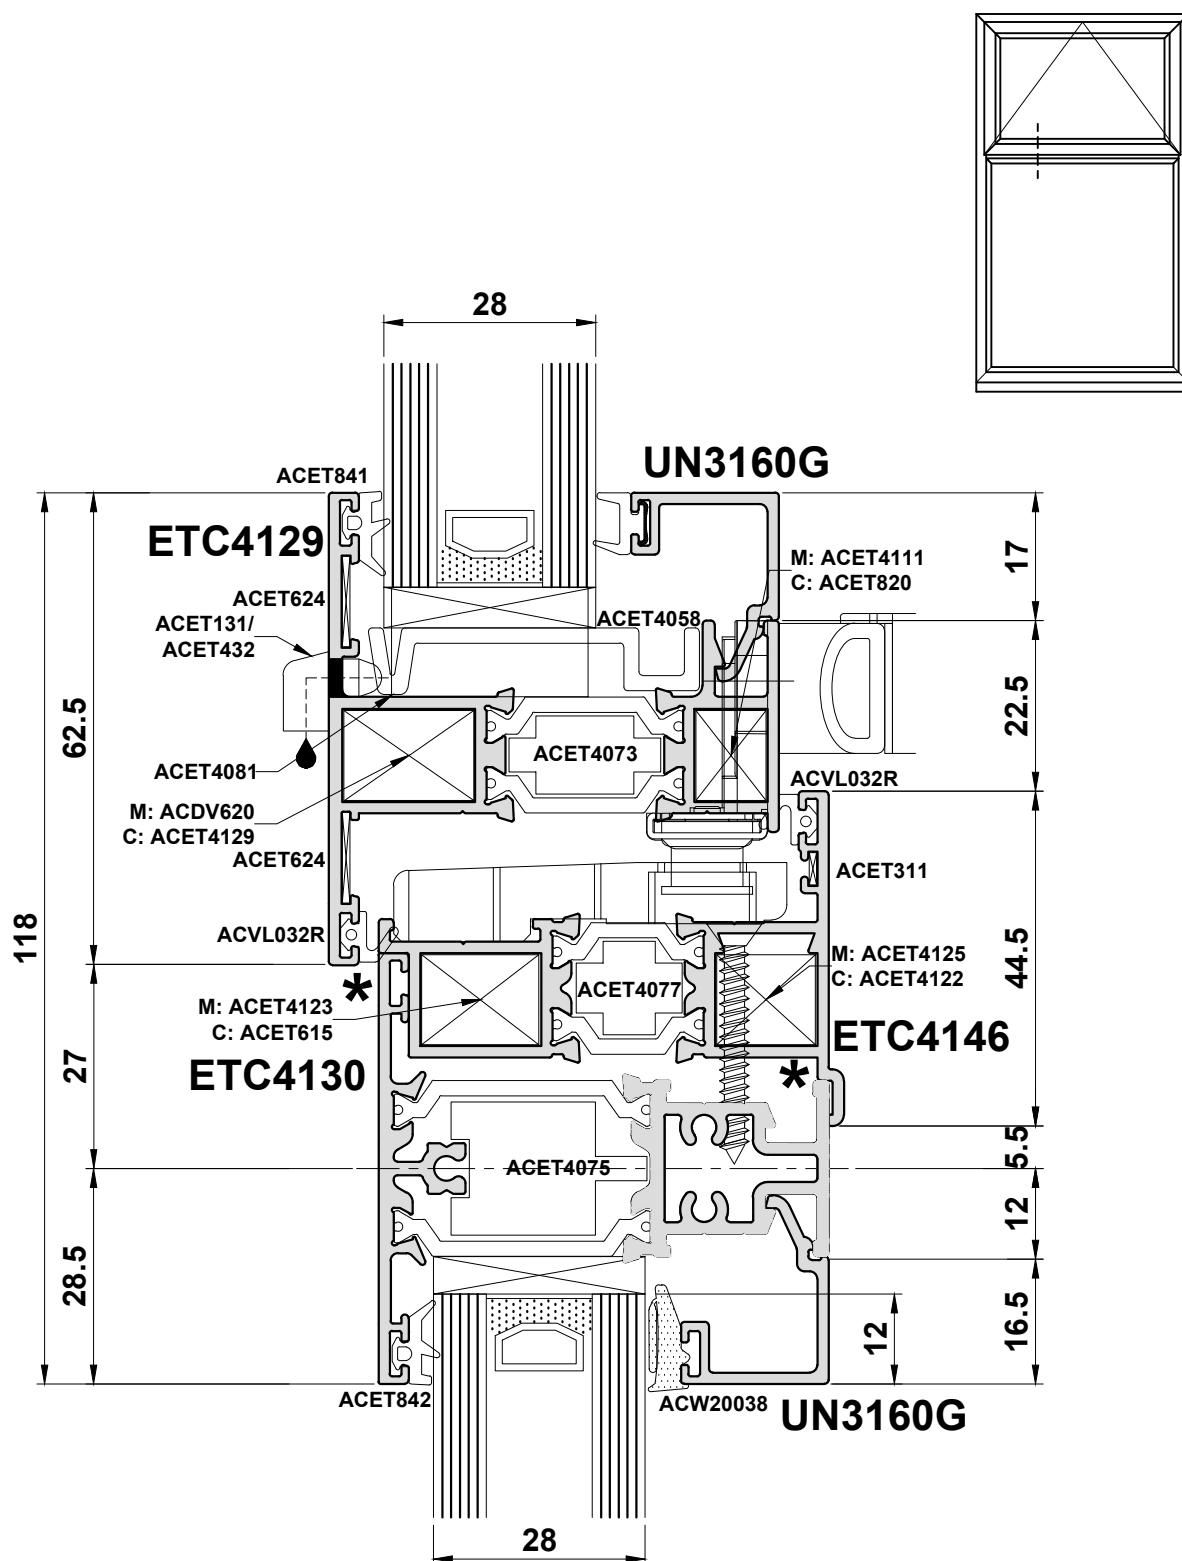Do Not Scale From This Drawing



Do Not Scale From This Drawing

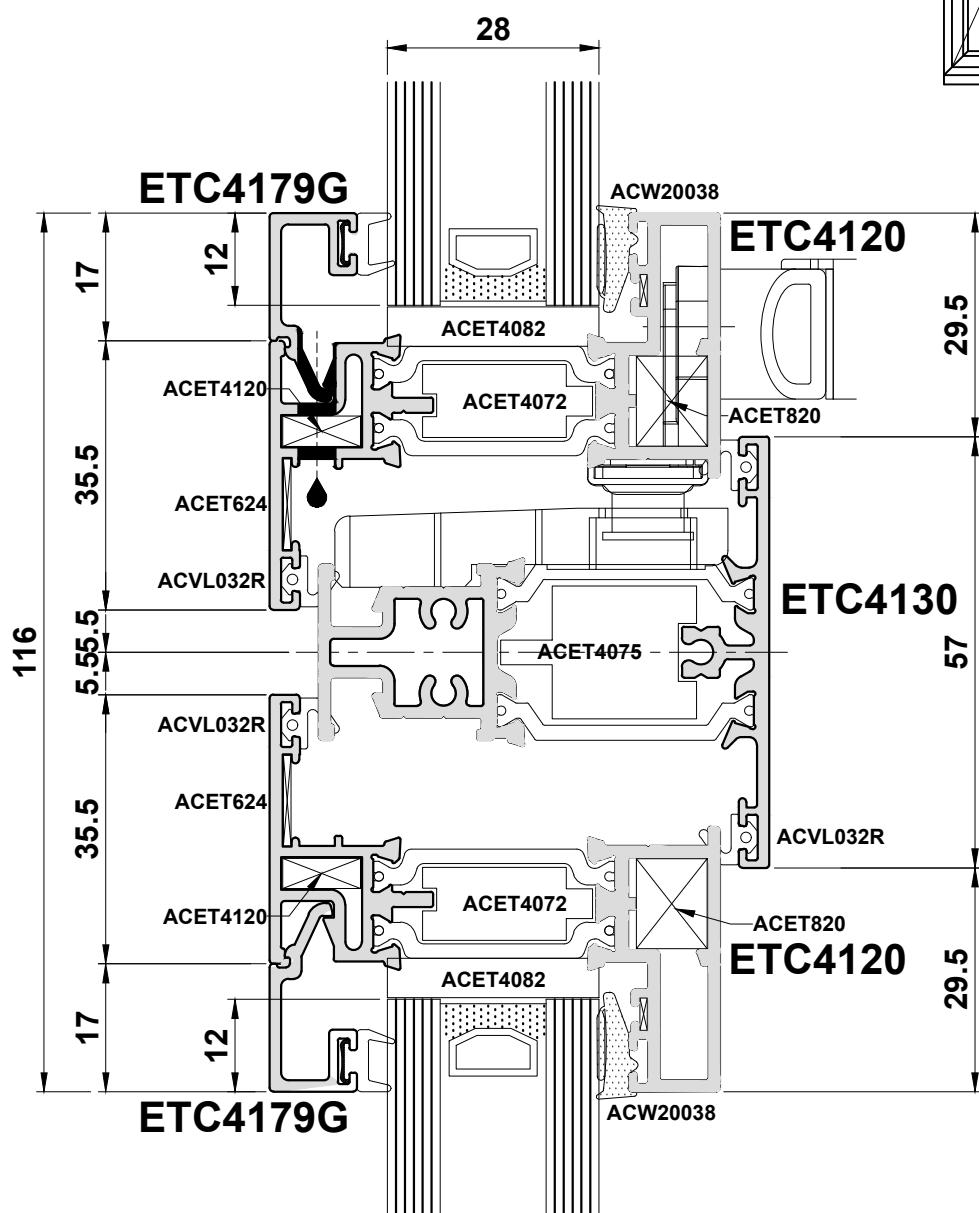
Detail 7A



Note: Transoms will drain through the join to the outerframe.


Do Not Scale From This Drawing

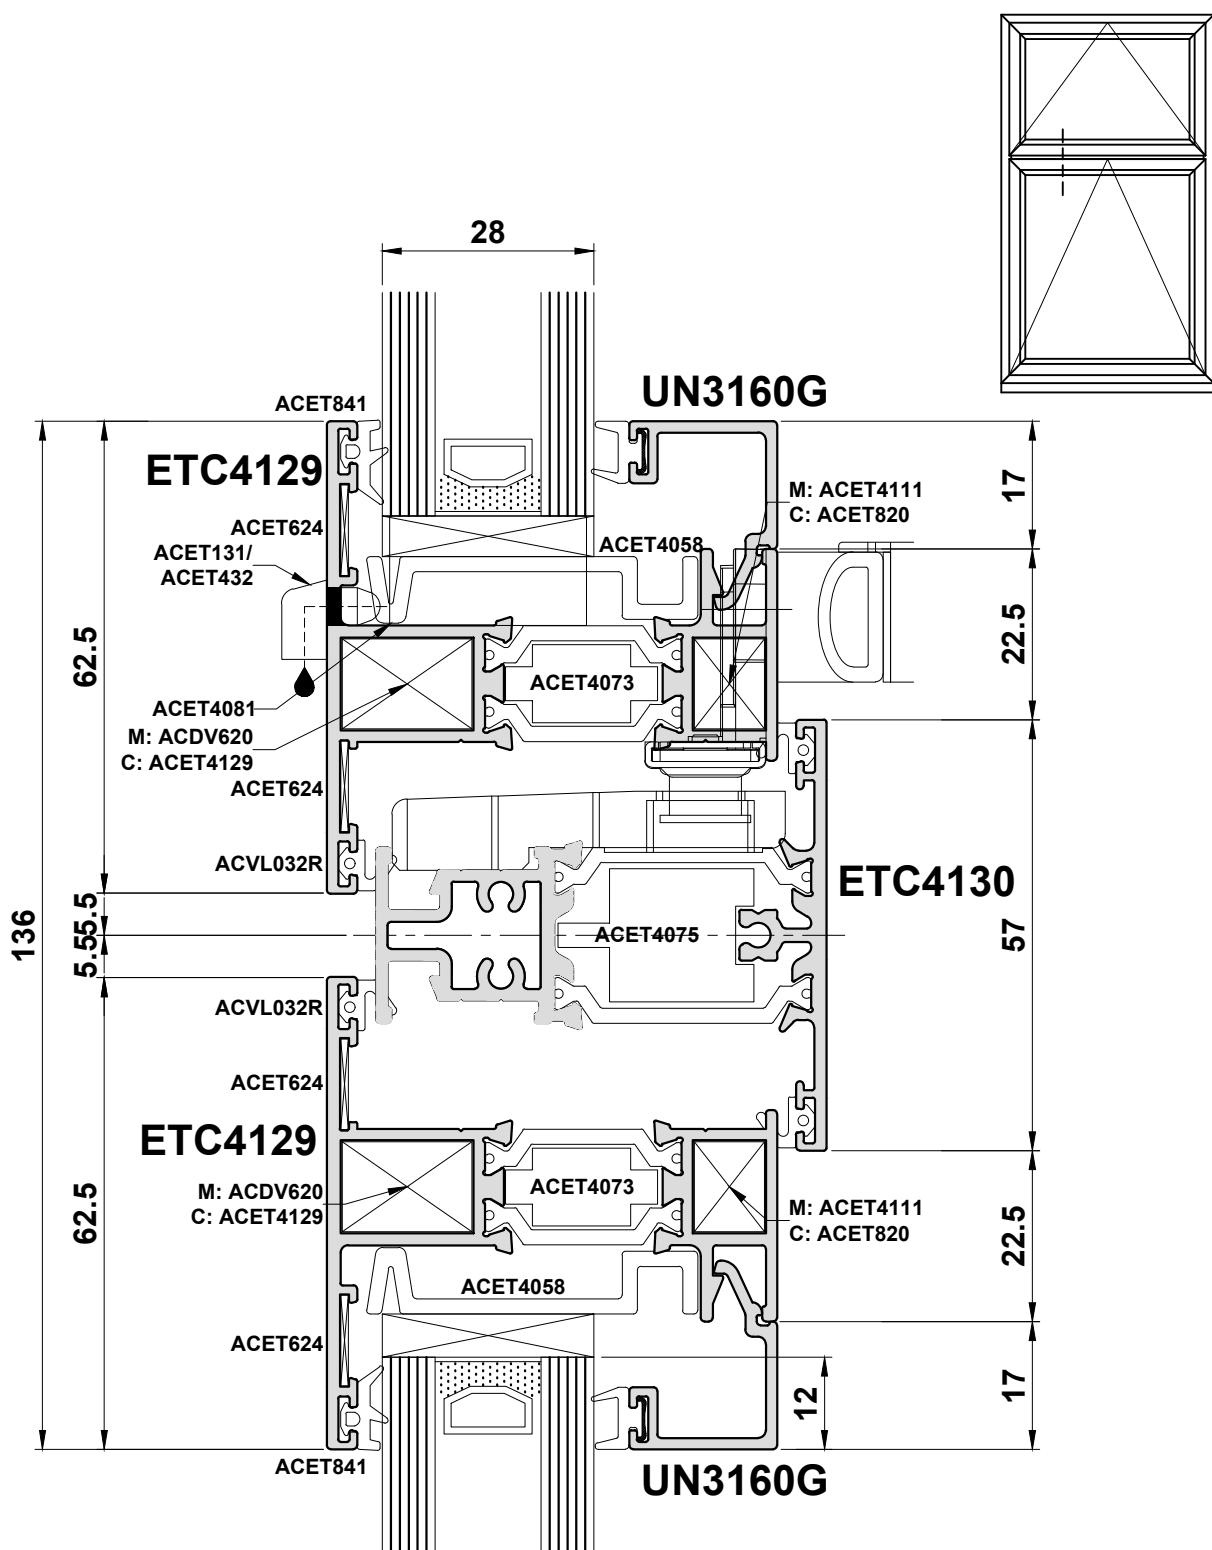Detail 7B



Do Not Scale From This Drawing


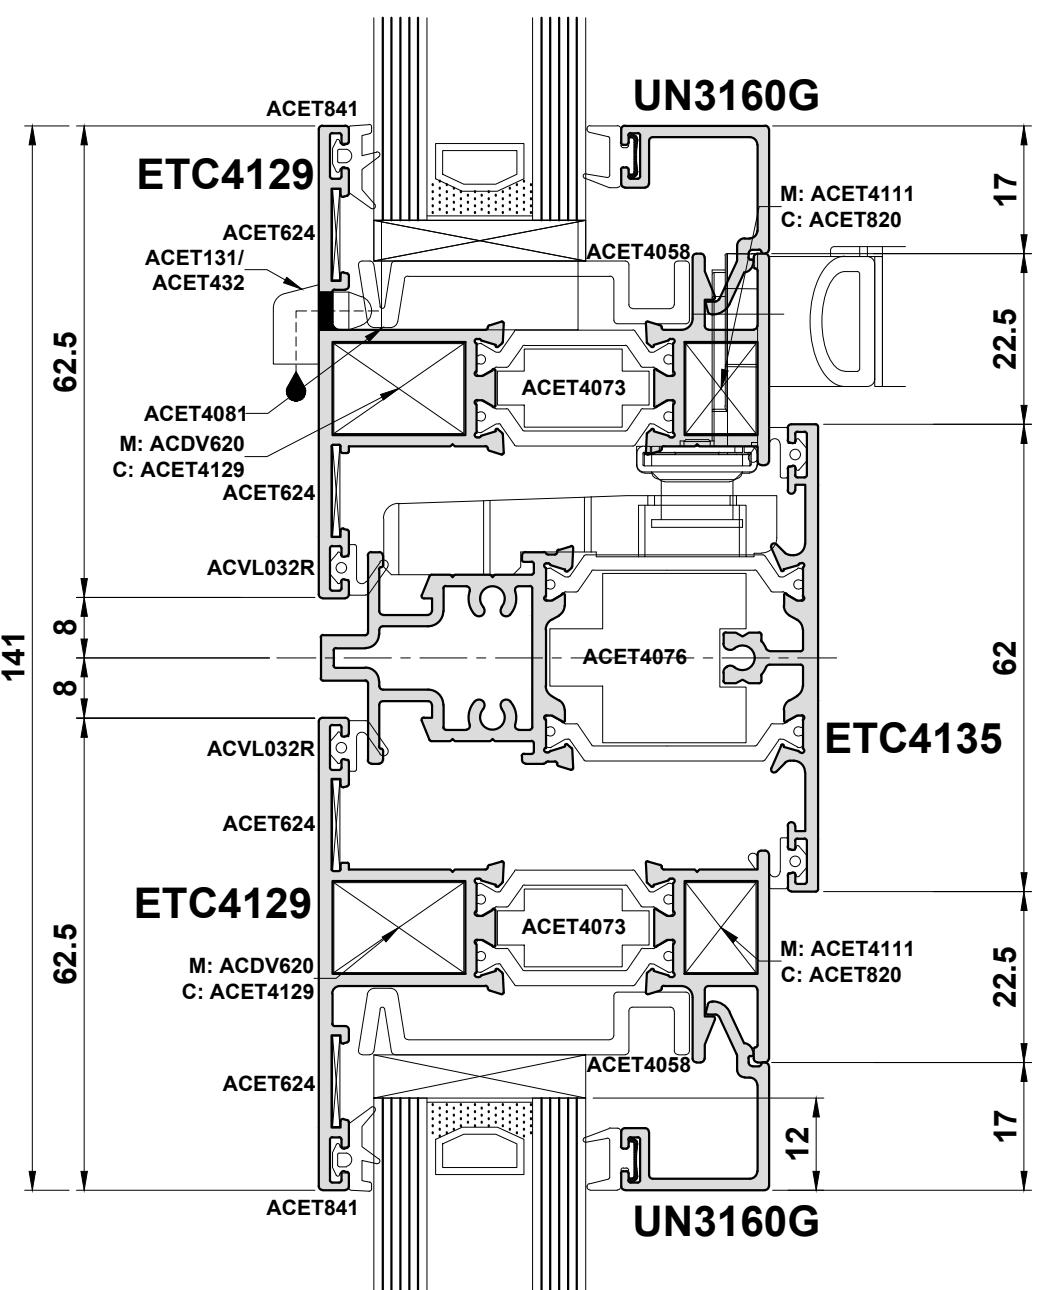
Detail 7C



Note: Transoms will drain through the join to the outerframe.


Do Not Scale From This Drawing

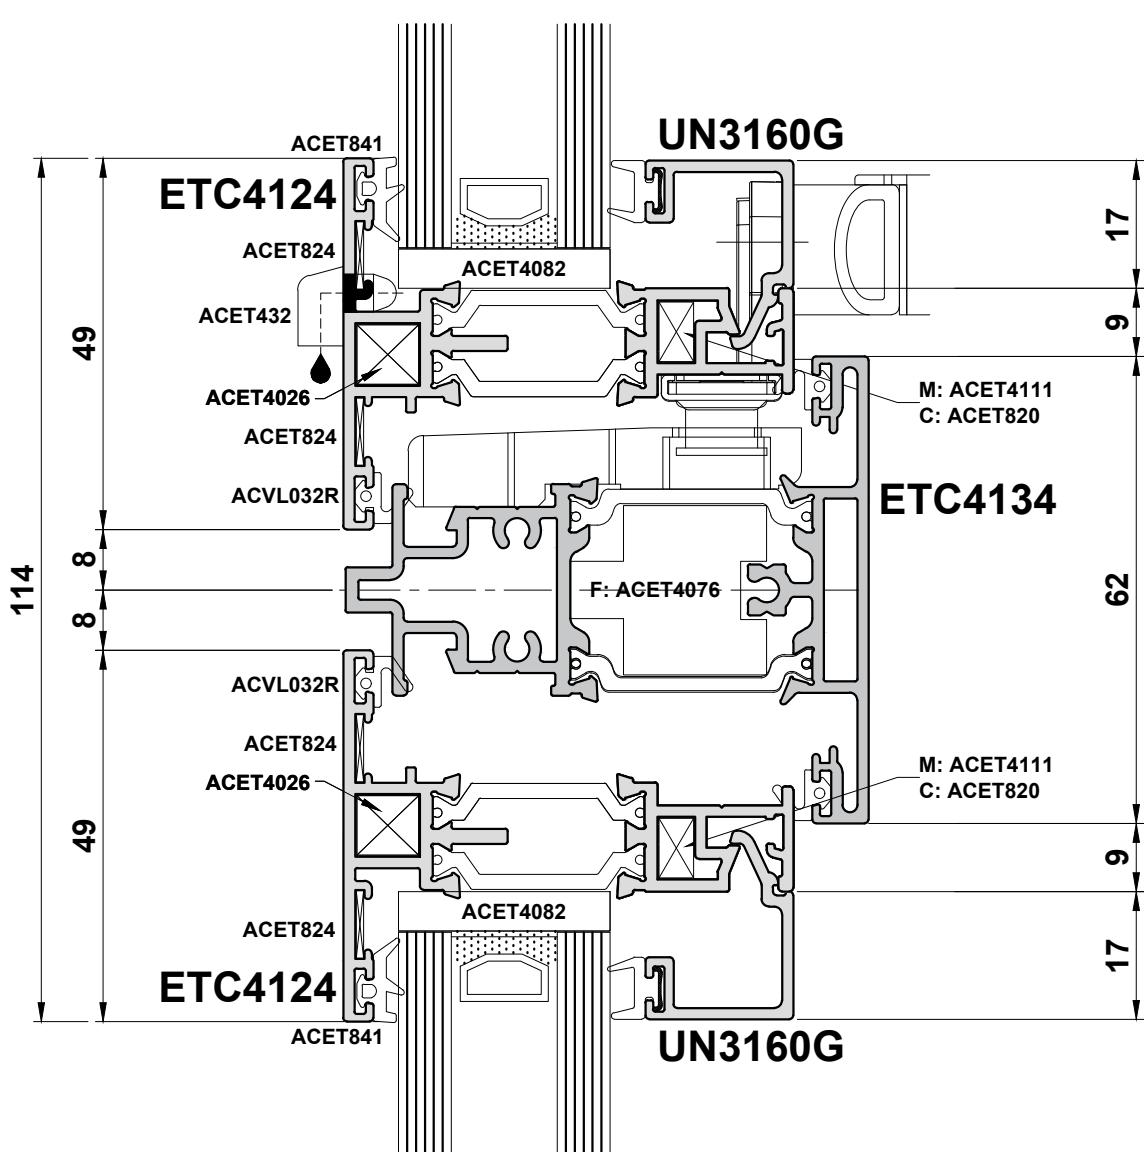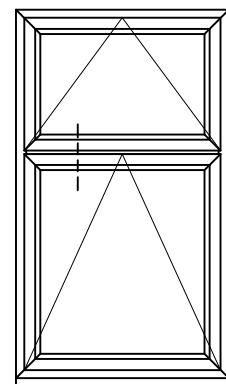Detail 7D




Do Not Scale From This Drawing

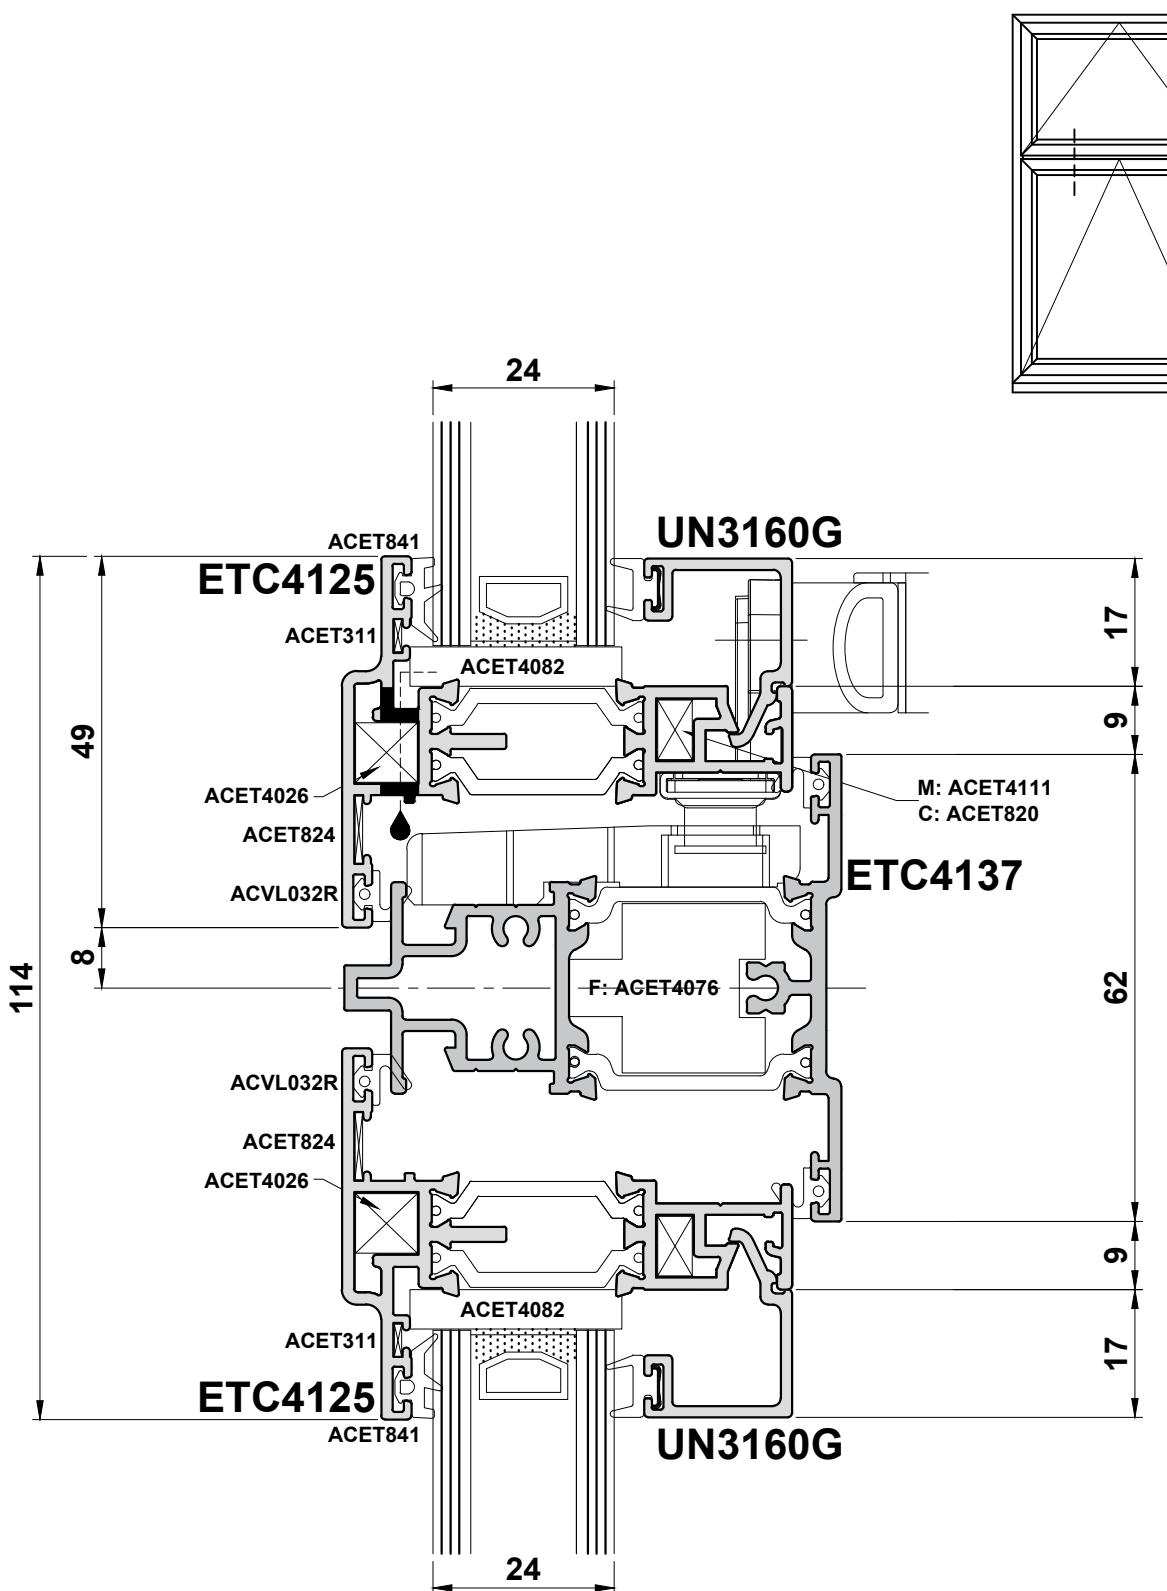Detail 7E




Do Not Scale From This Drawing

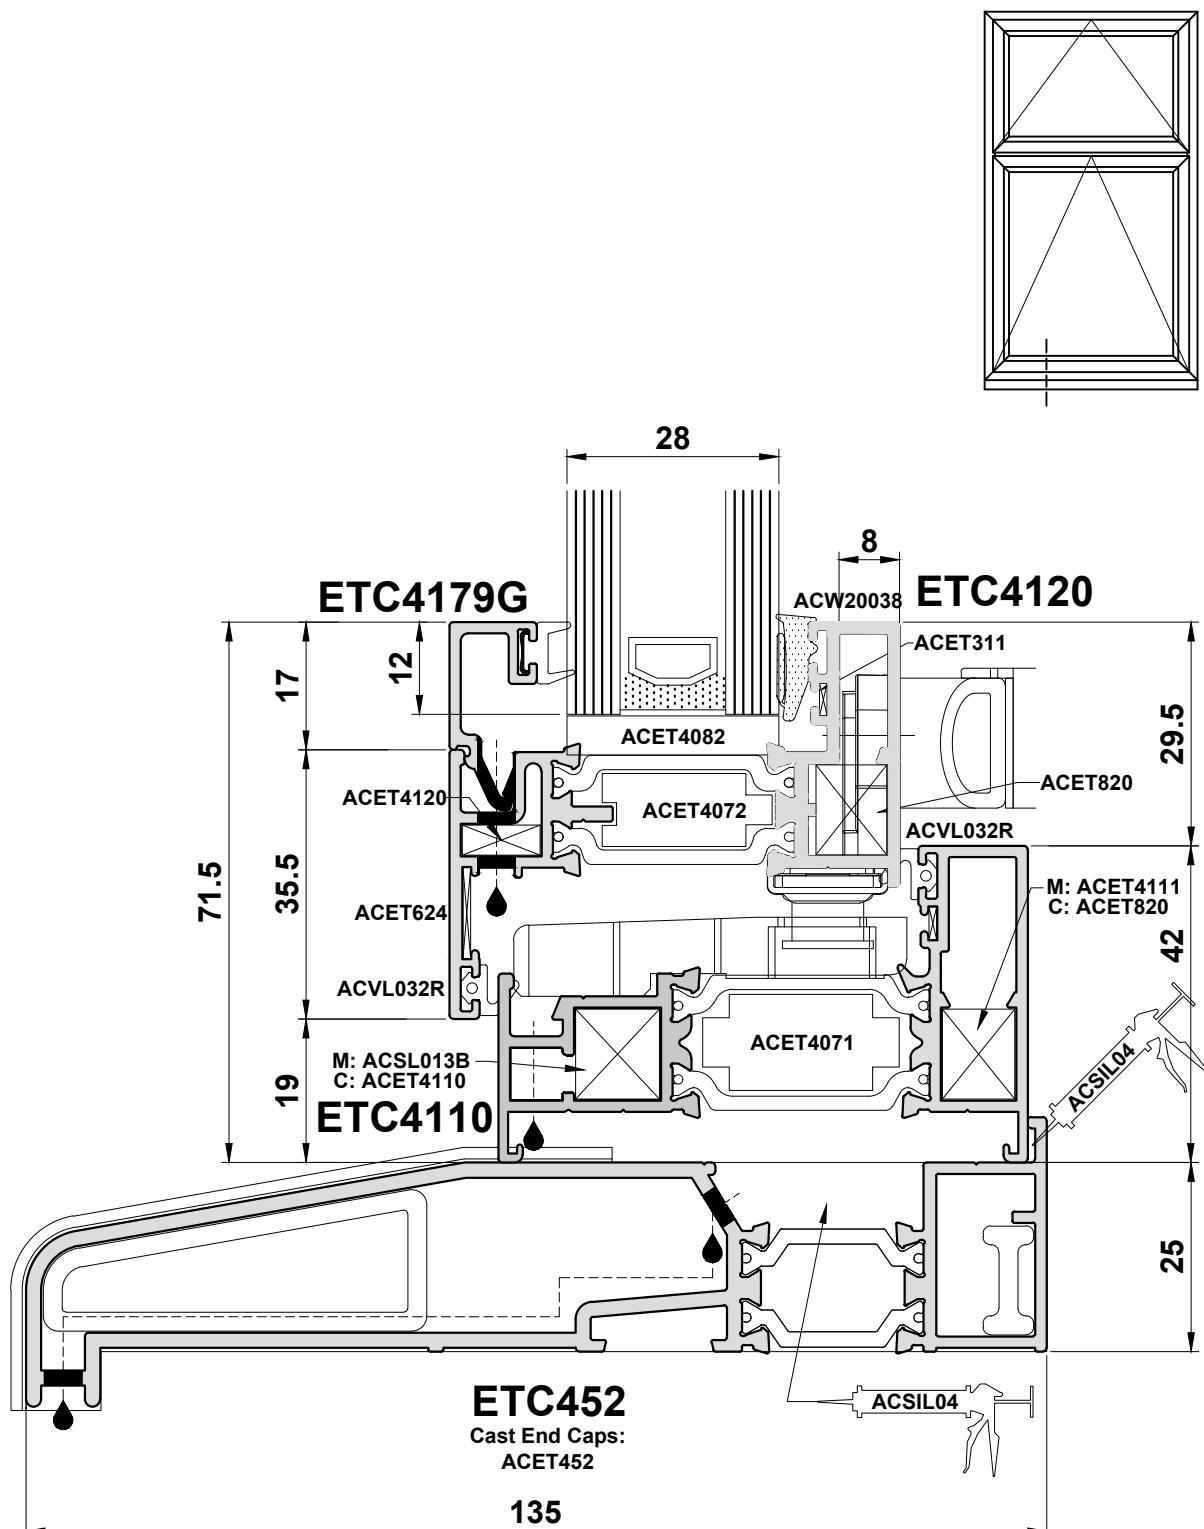Detail 8A



Do Not Scale From This Drawing

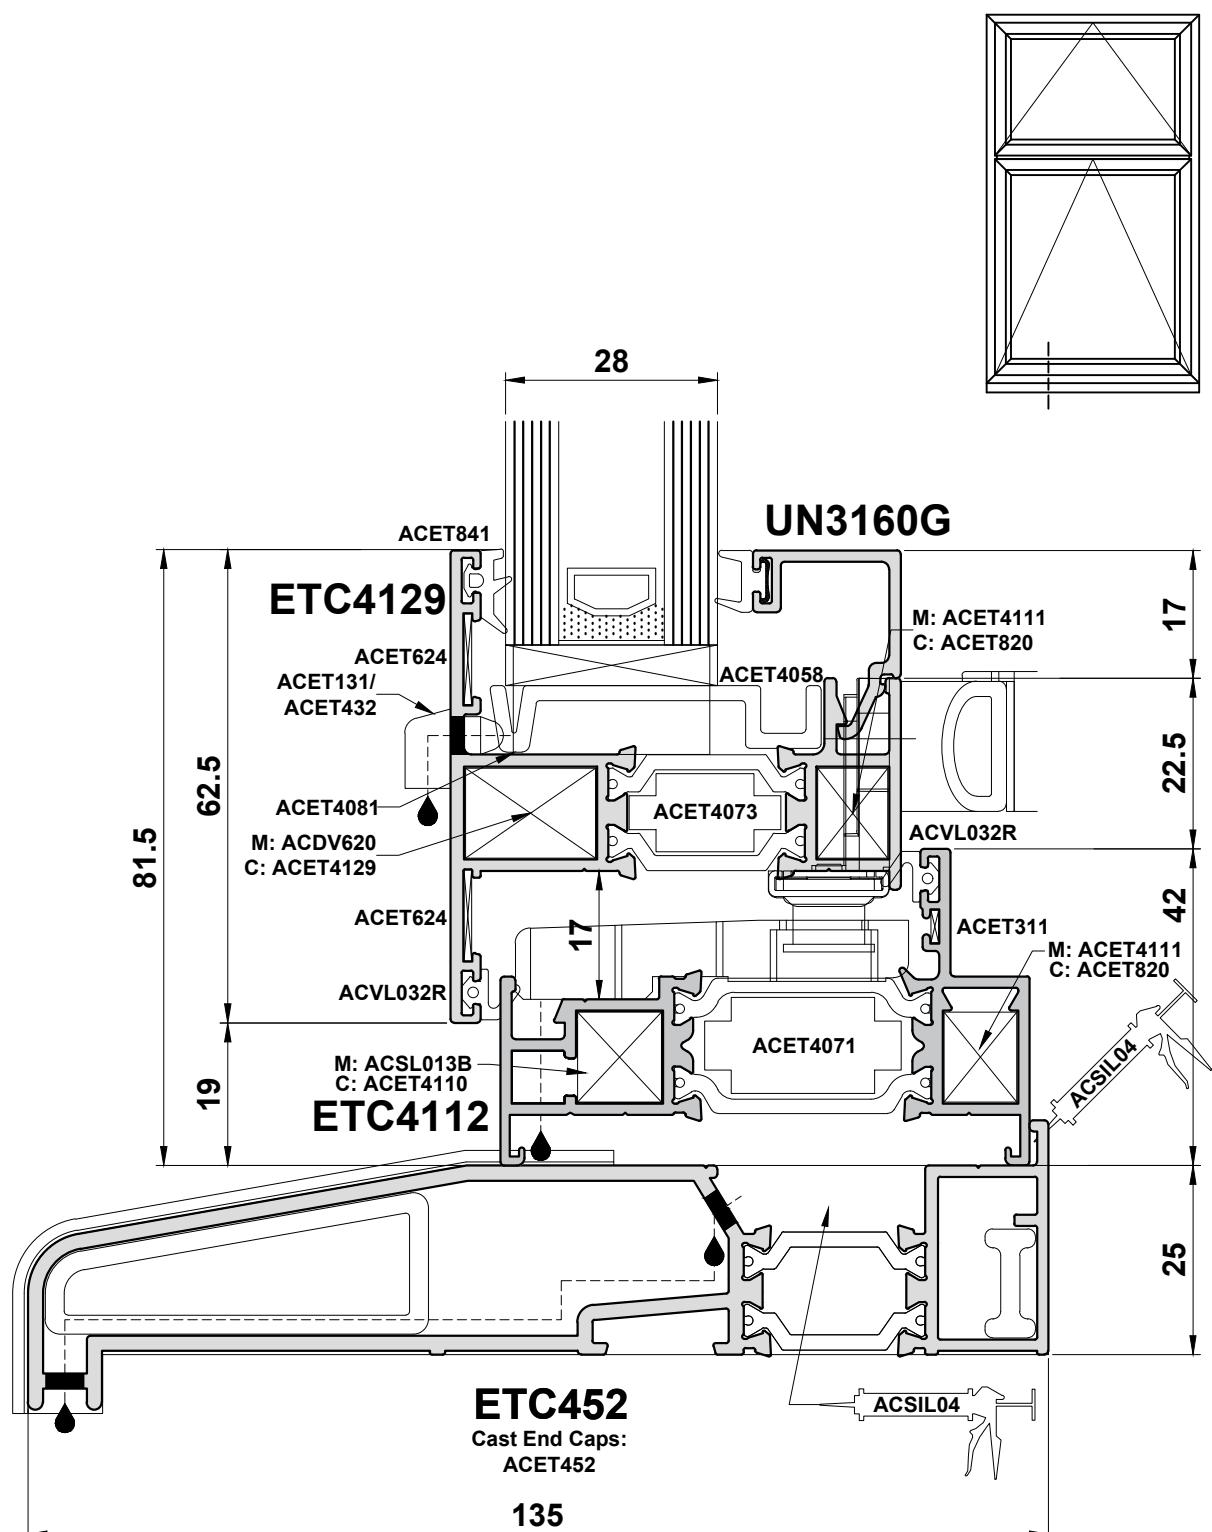
Detail 8B



Cill end caps should be sealed to cill to prevent water egress over edge

Do Not Scale From This Drawing

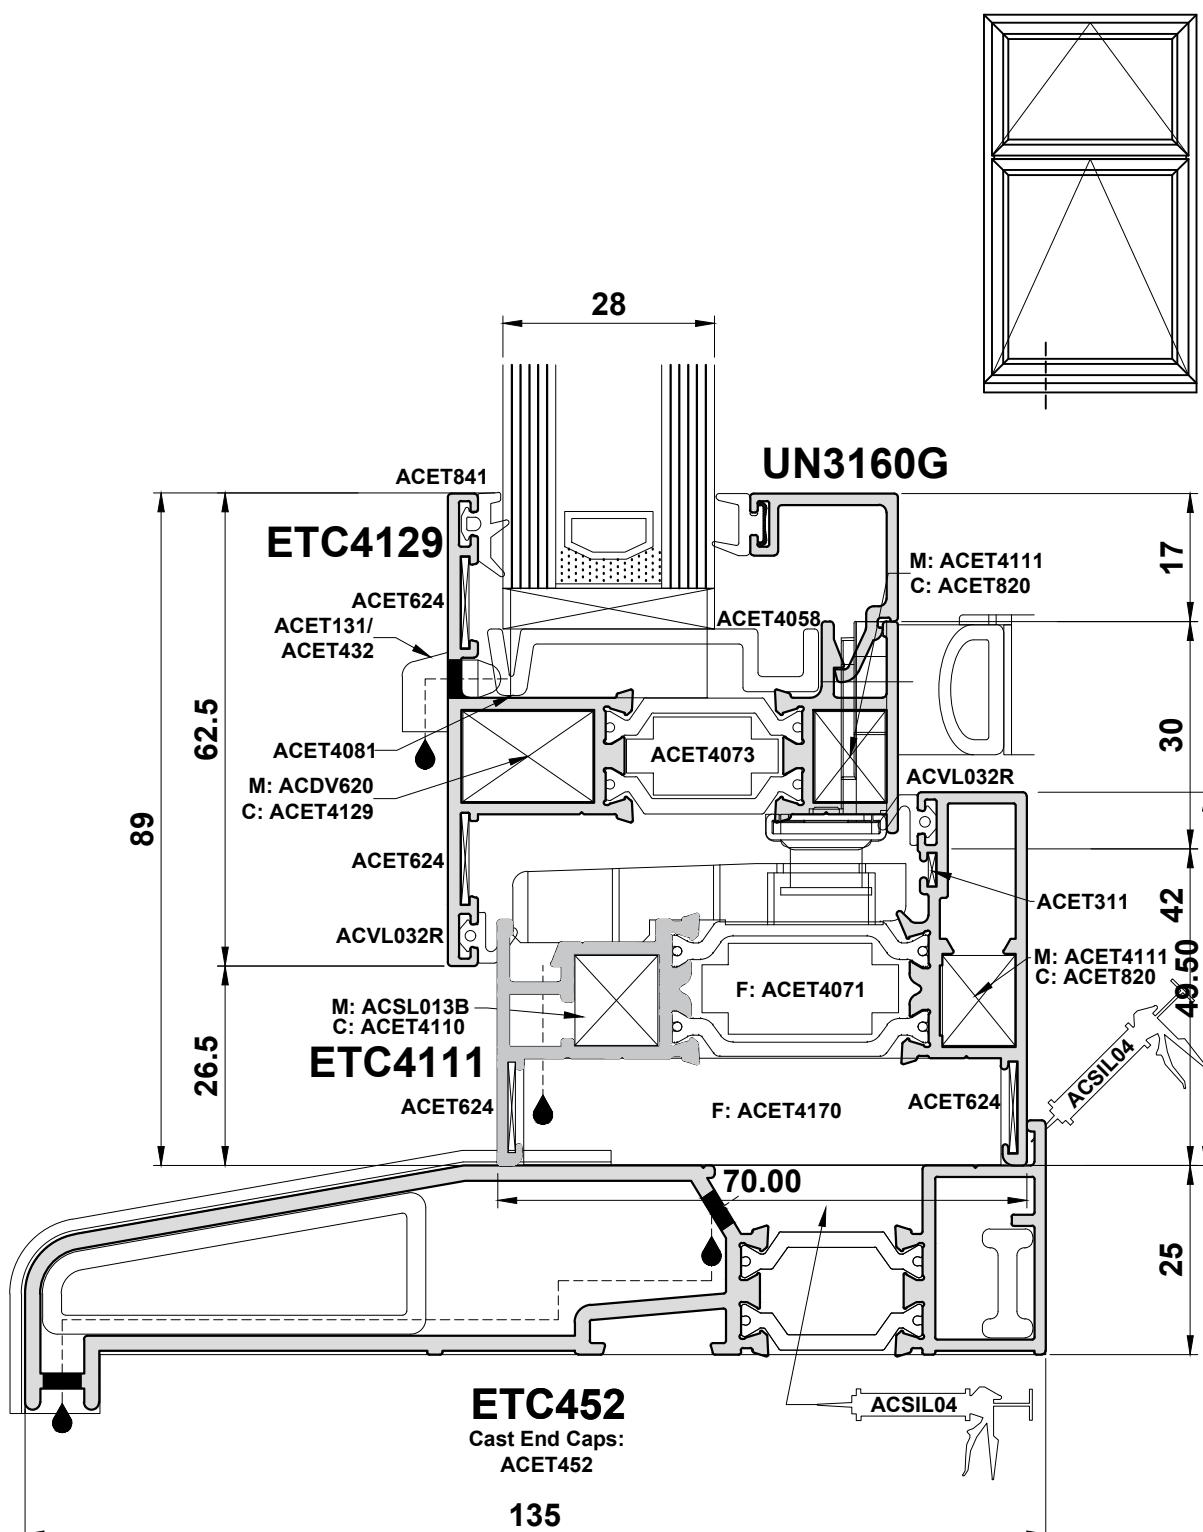
Detail 8C



Cill end caps should be sealed to cill to prevent water egress over edge



Do Not Scale From This Drawing

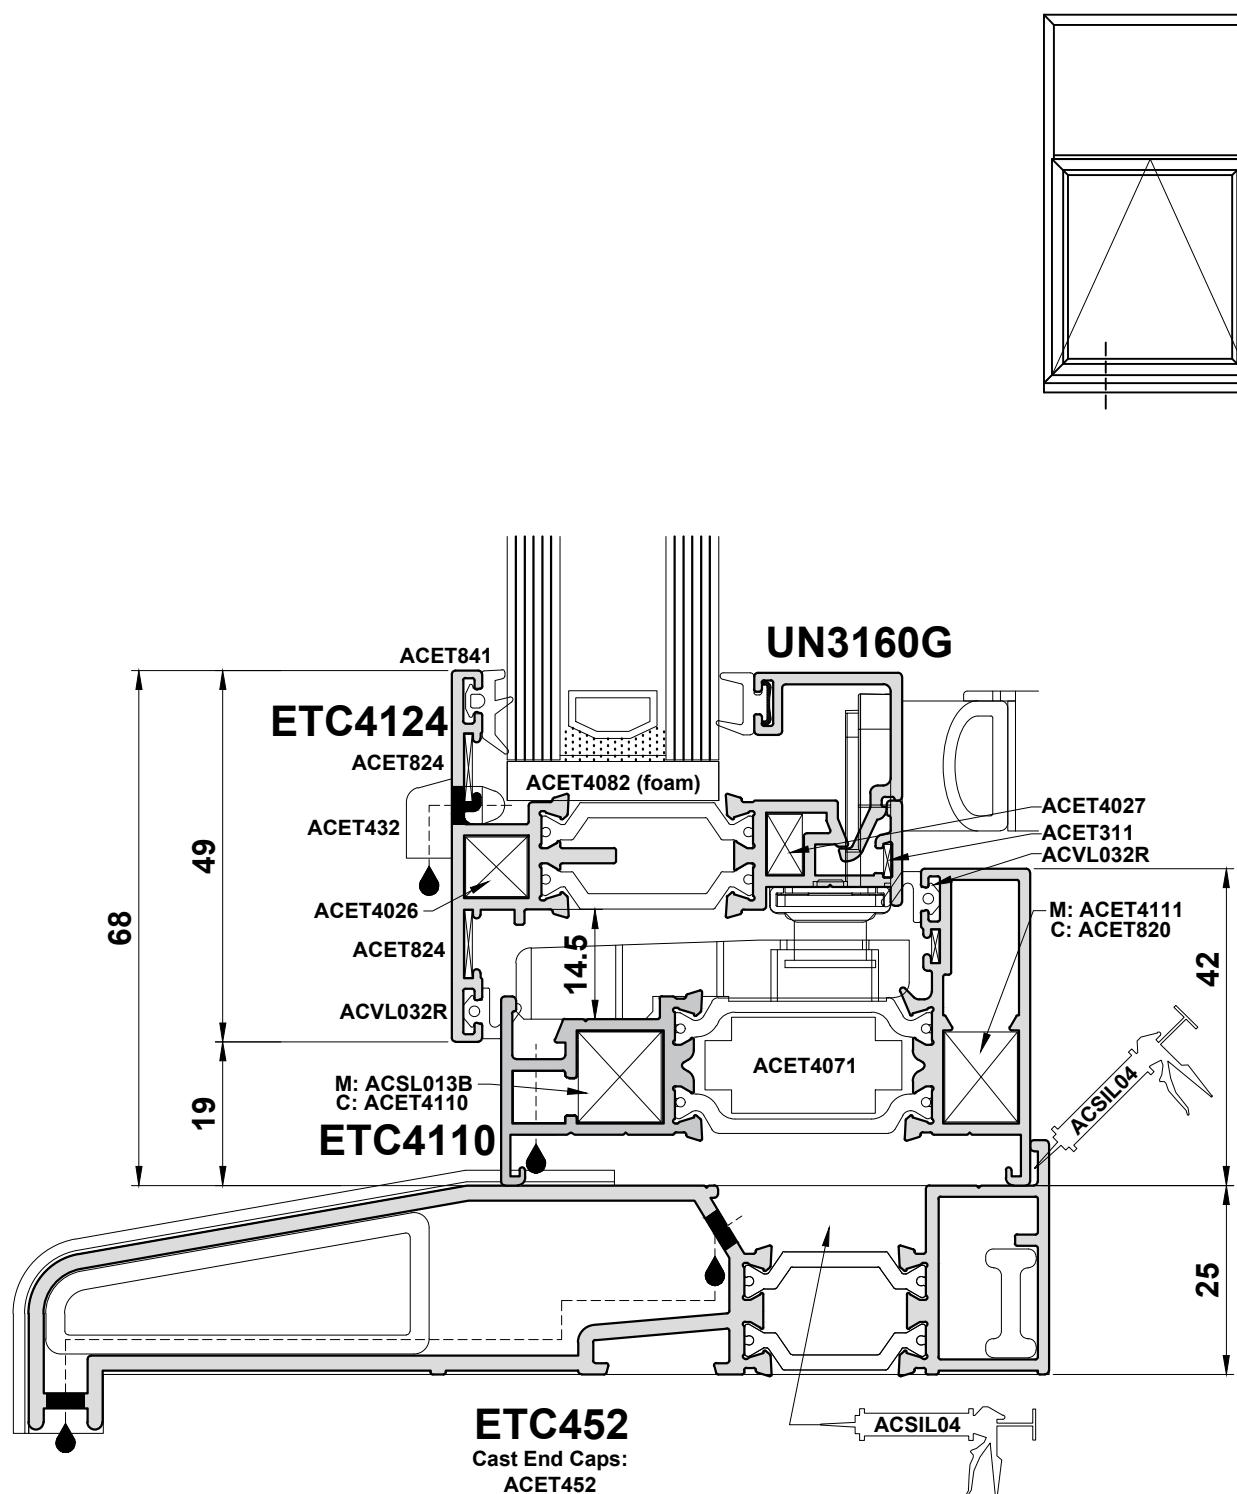Detail 8D



Cill end caps should be sealed to cill to prevent water egress over edge

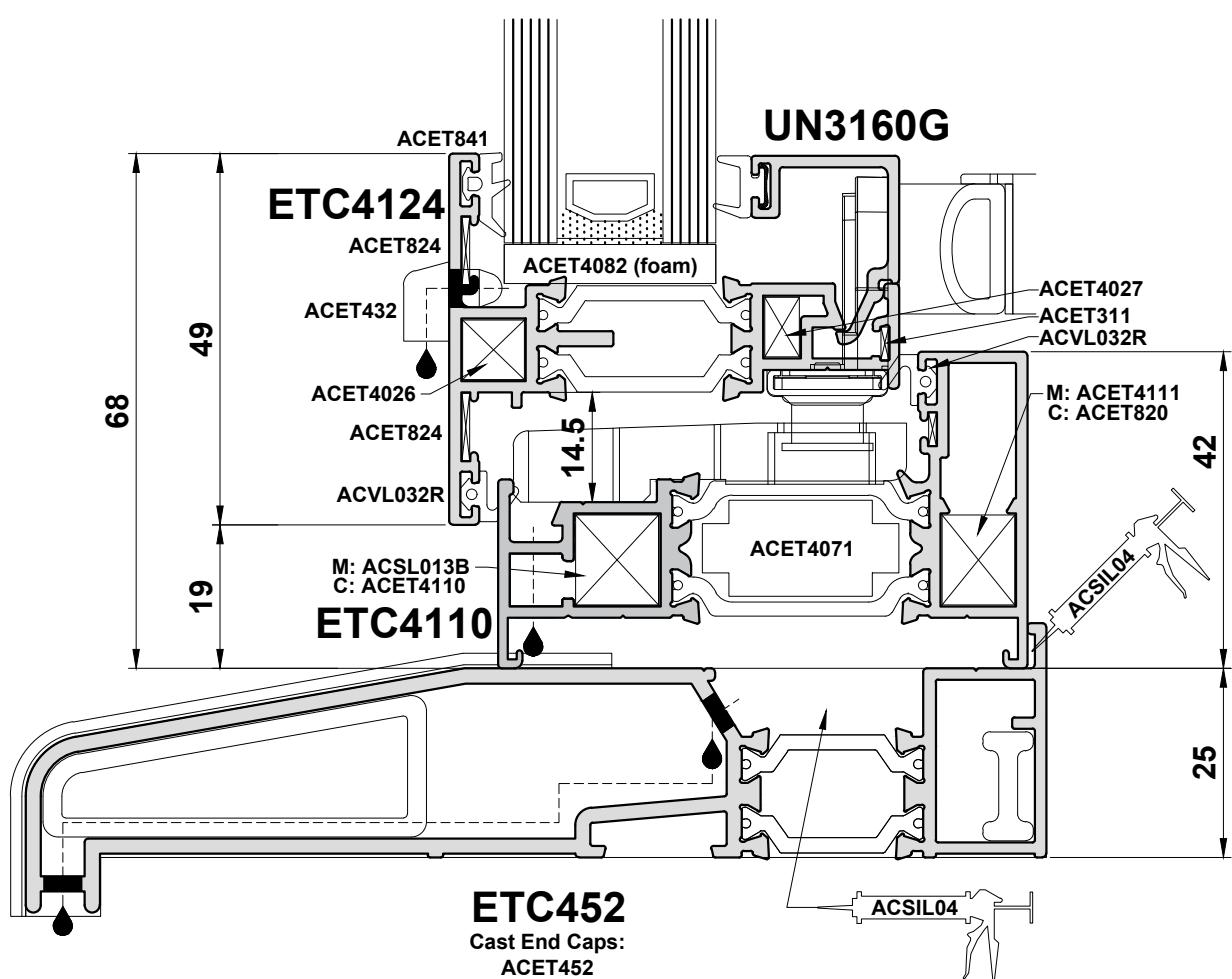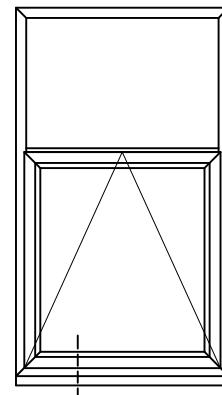
Do Not Scale From This Drawing



Cill end caps should be sealed to cill to prevent water egress over edge


Do Not Scale From This Drawing

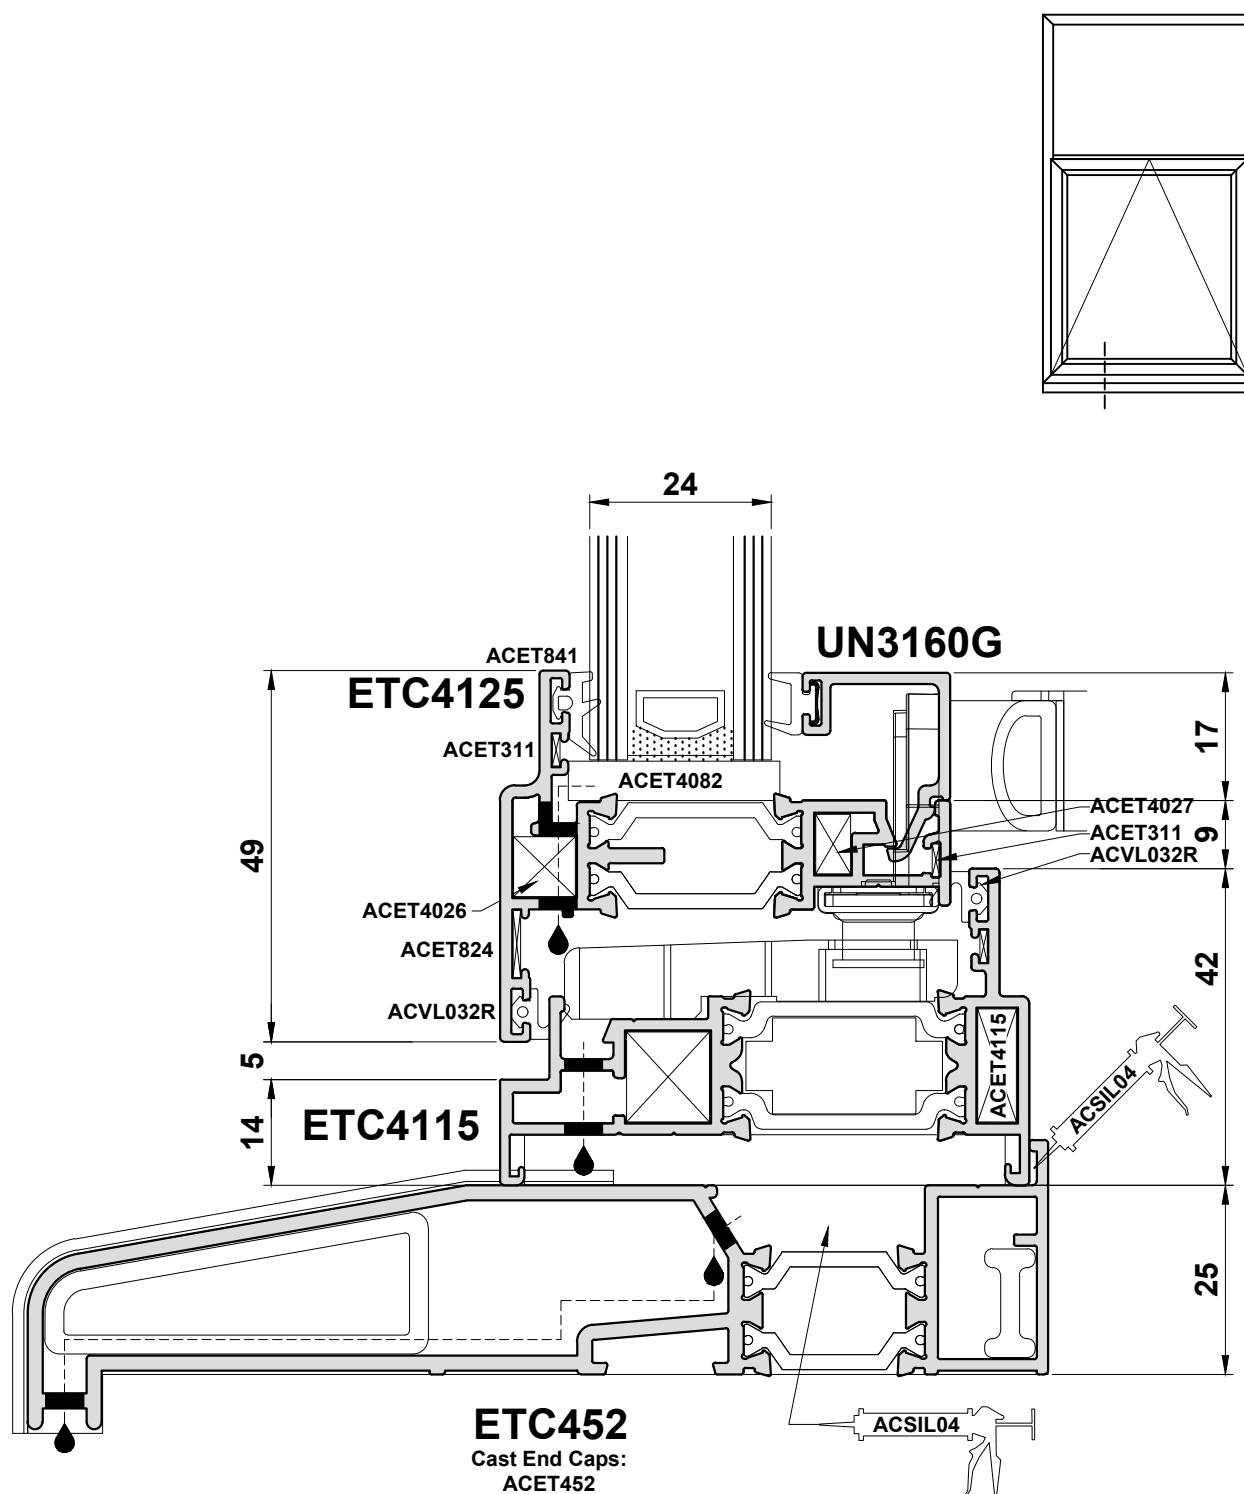Detail 8F



Do Not Scale From This Drawing

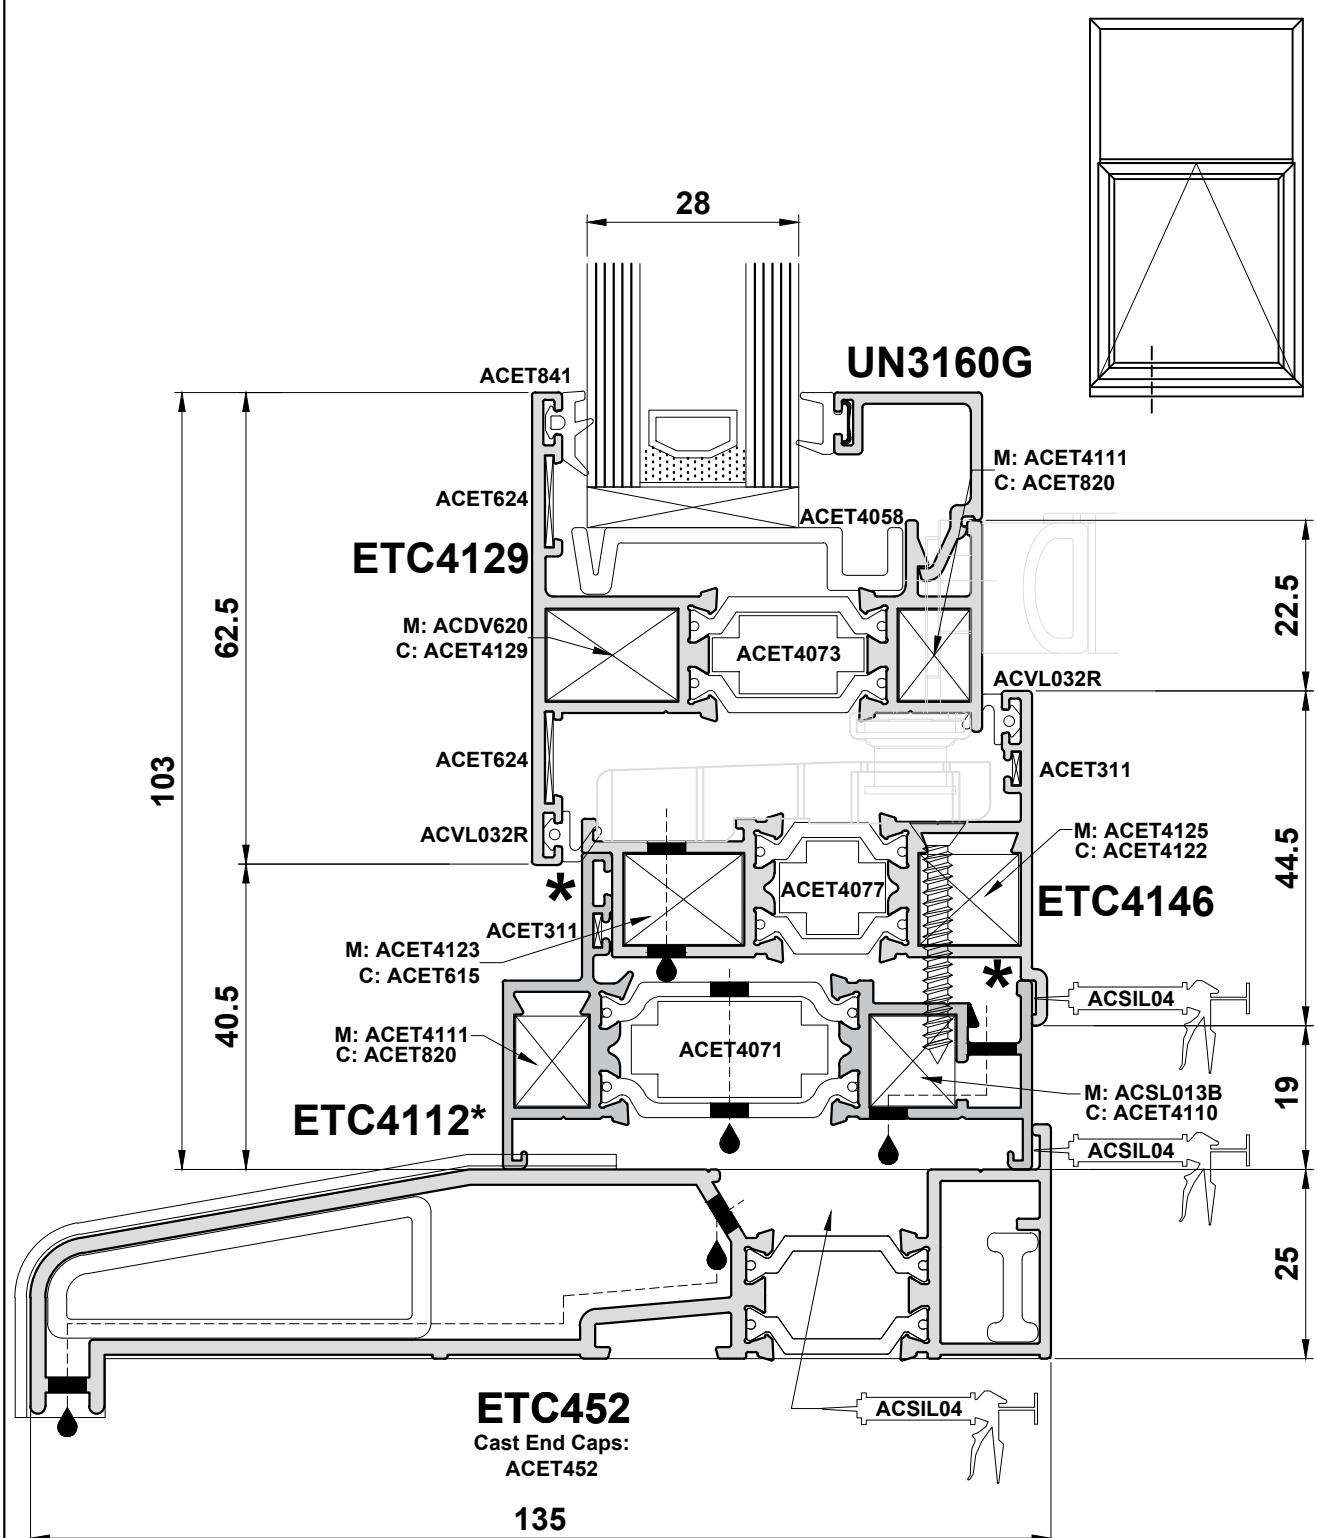
Detail 8G



*Note: Where ETC4146 is used, concealed drainage through a cill is required.
Cill end caps should be sealed to cill to prevent water egress over edge.


Do Not Scale From This Drawing

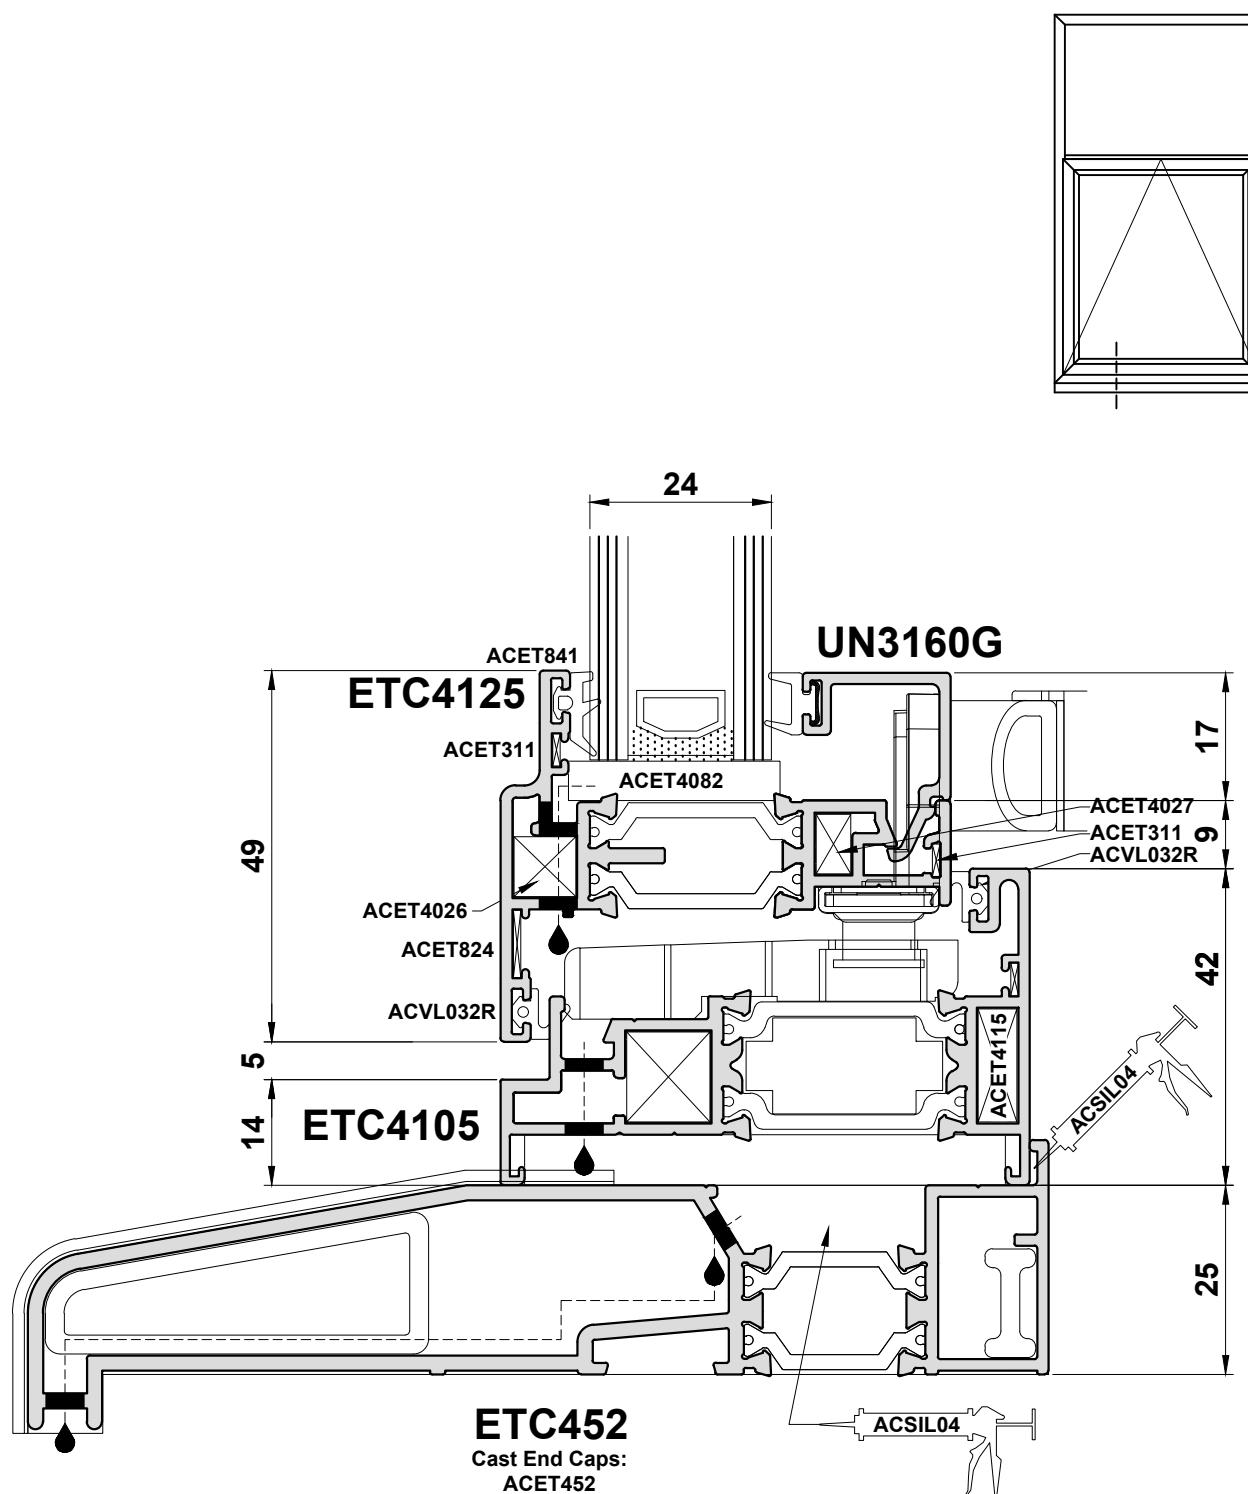Detail 8H





Do Not Scale From This Drawing

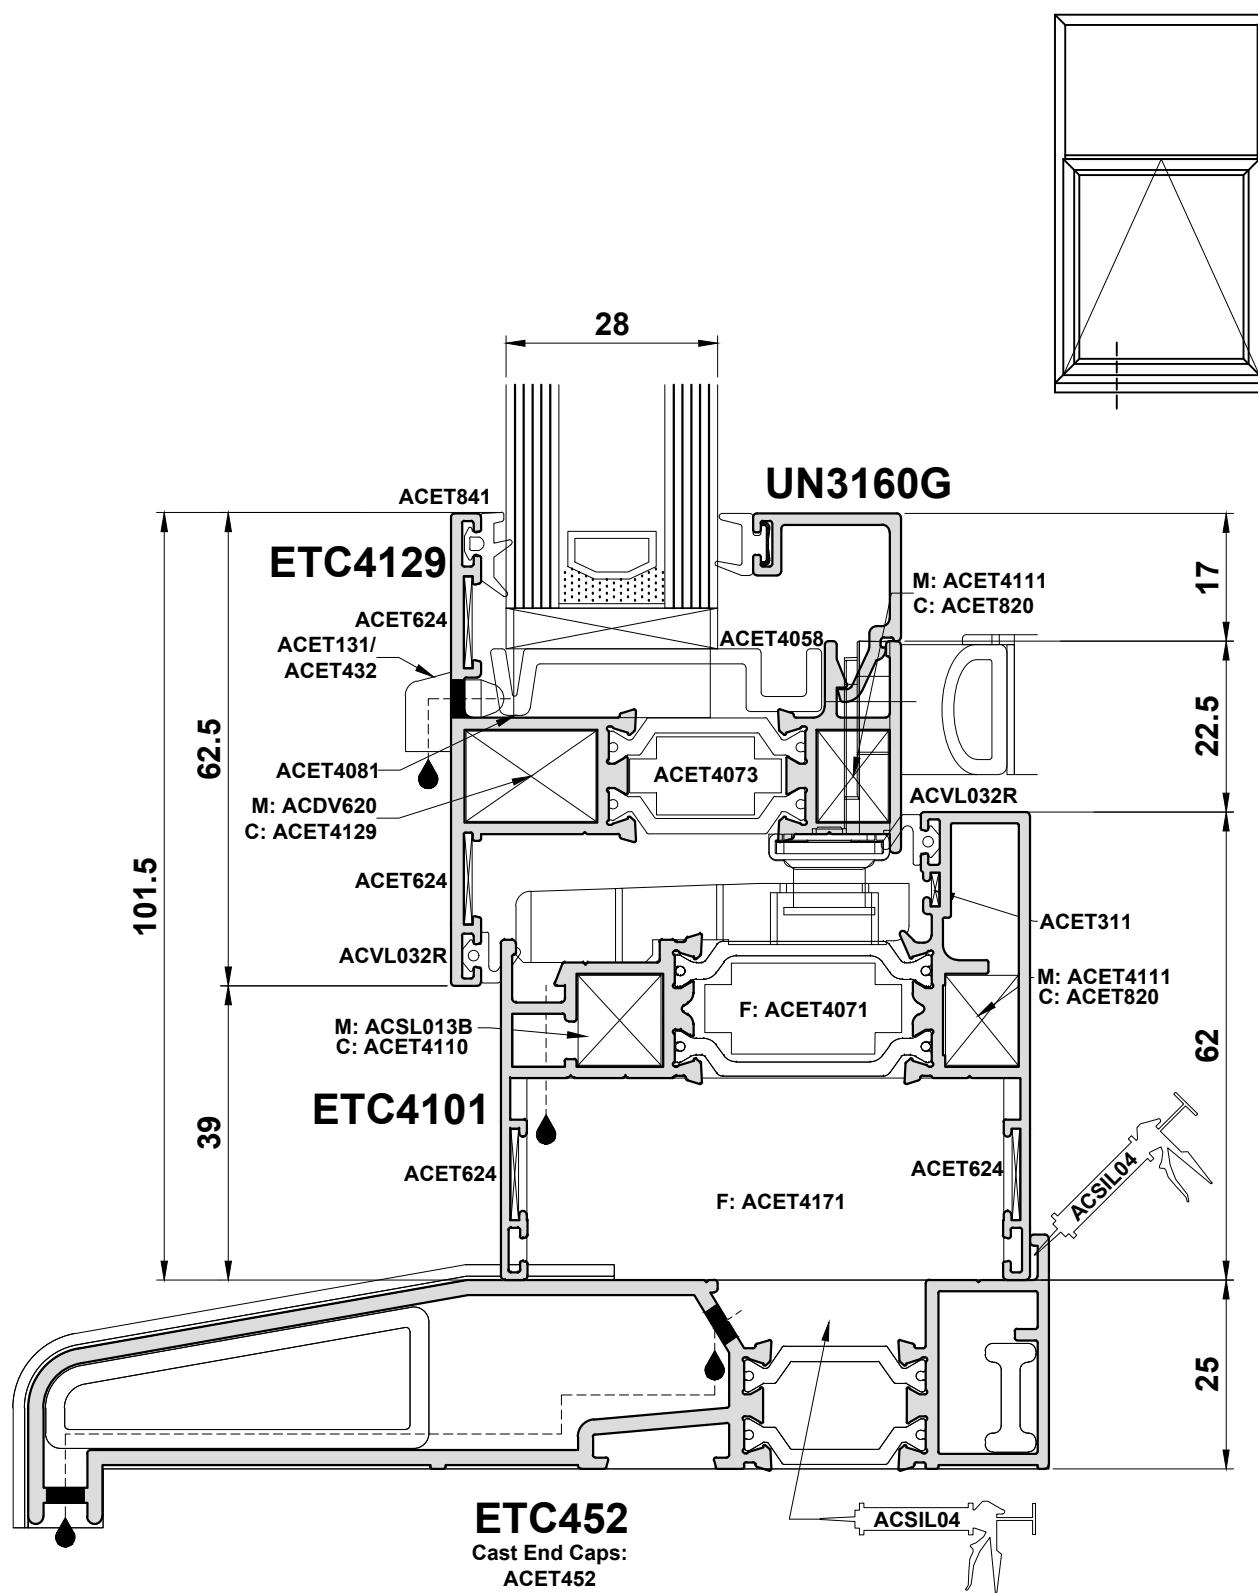Detail 8I





Do Not Scale From This Drawing

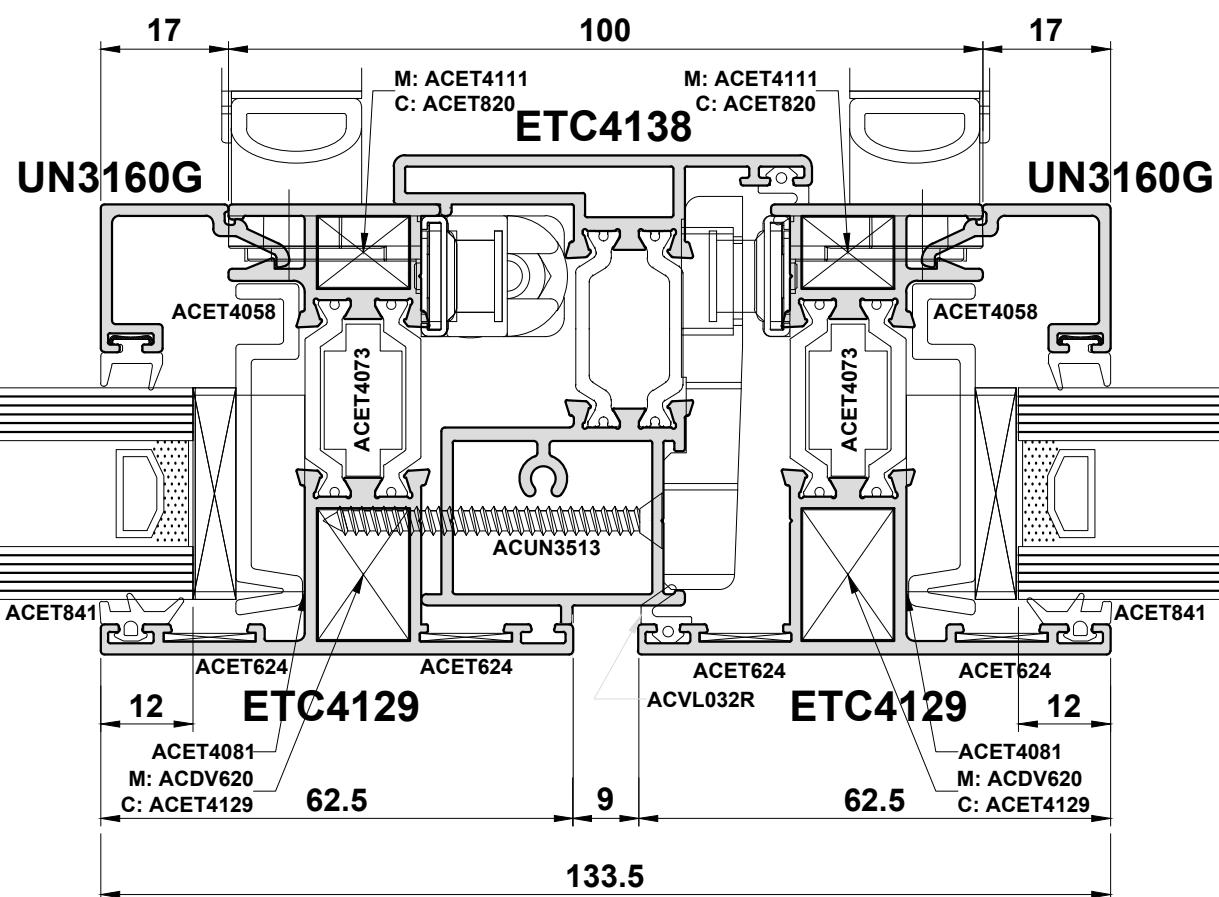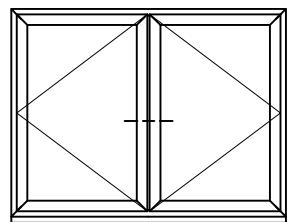Detail 9A





Do Not Scale From This Drawing

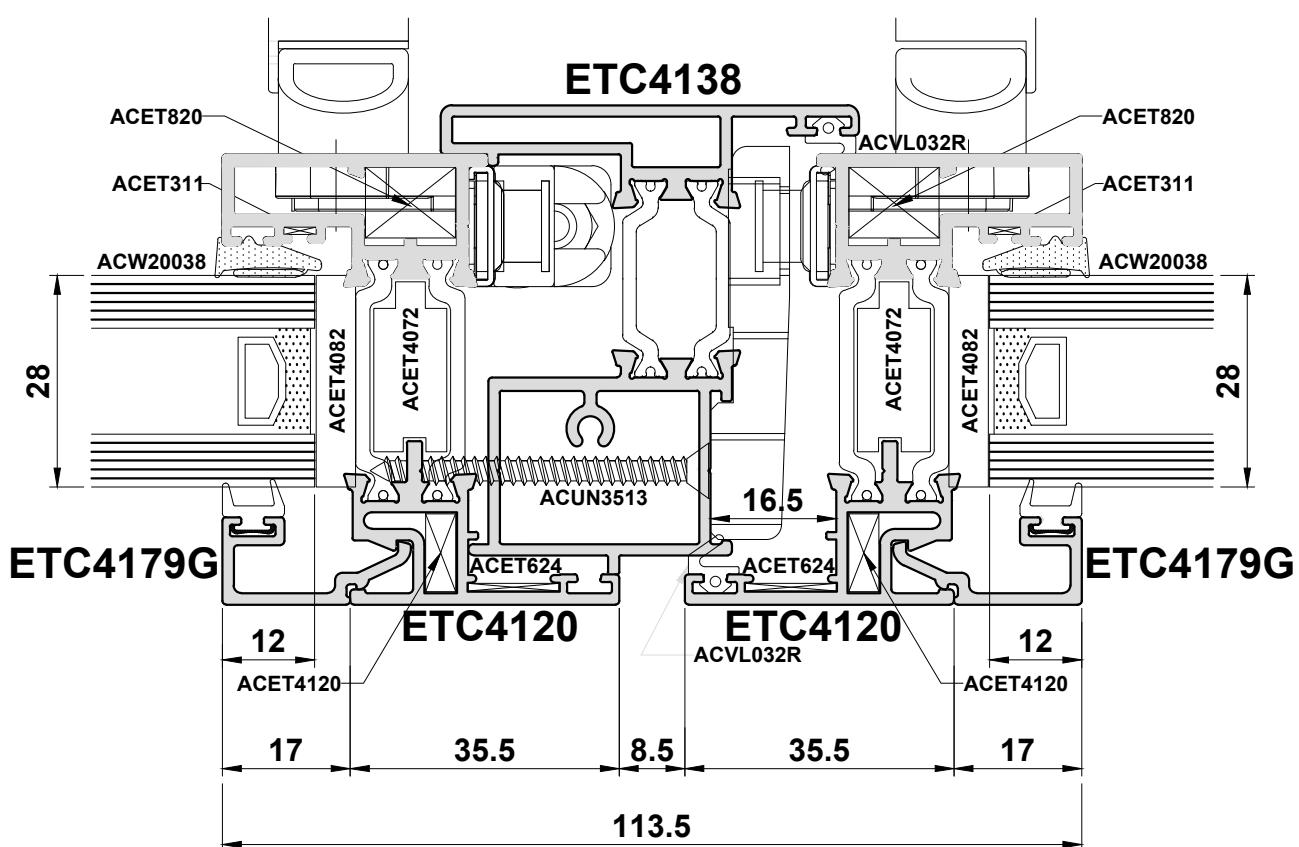
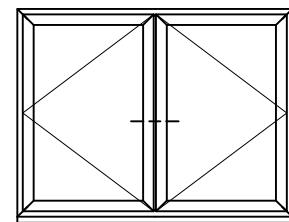
Detail 9B





Do Not Scale From This Drawing

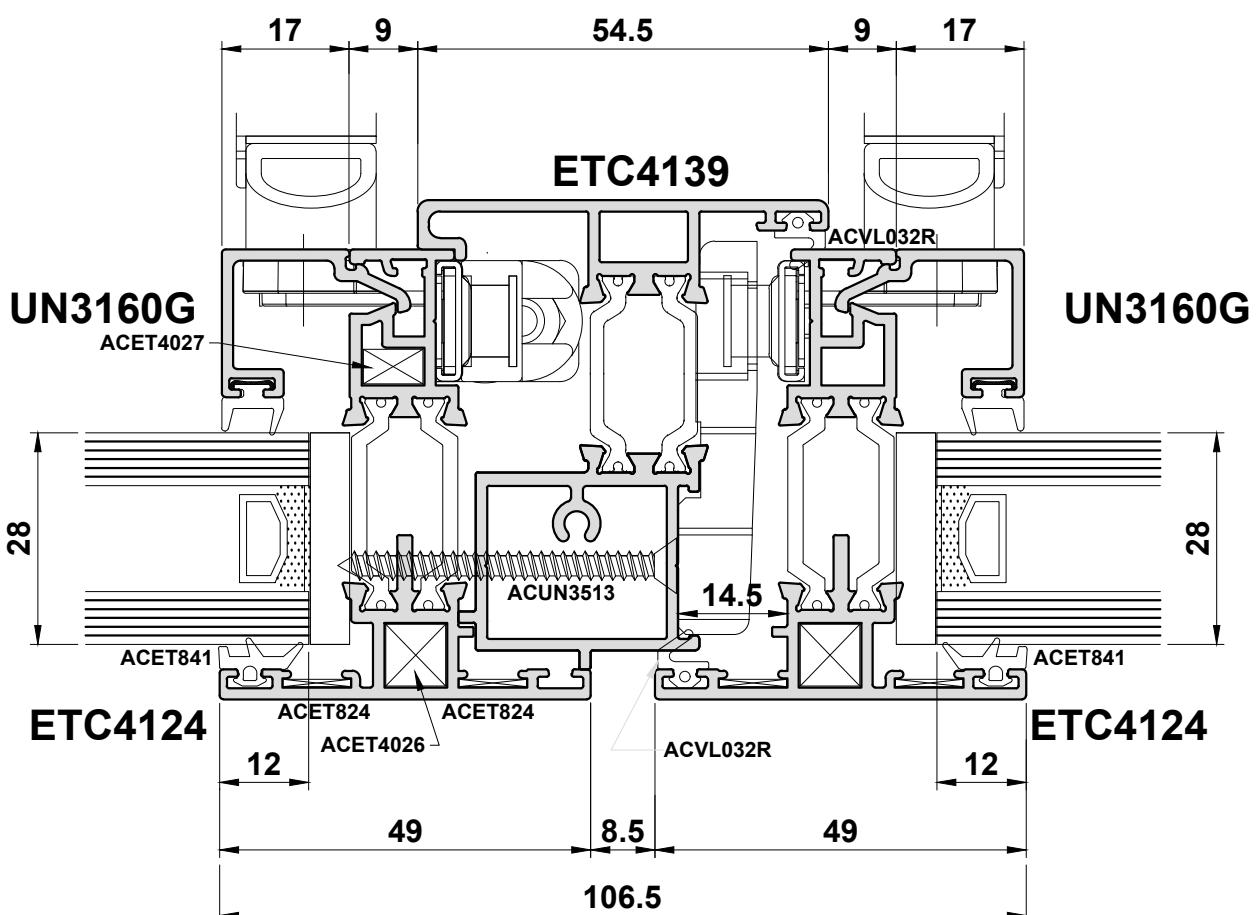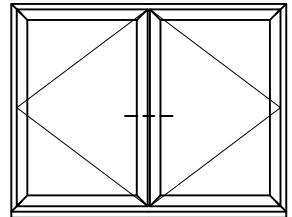


Do Not Scale From This Drawing

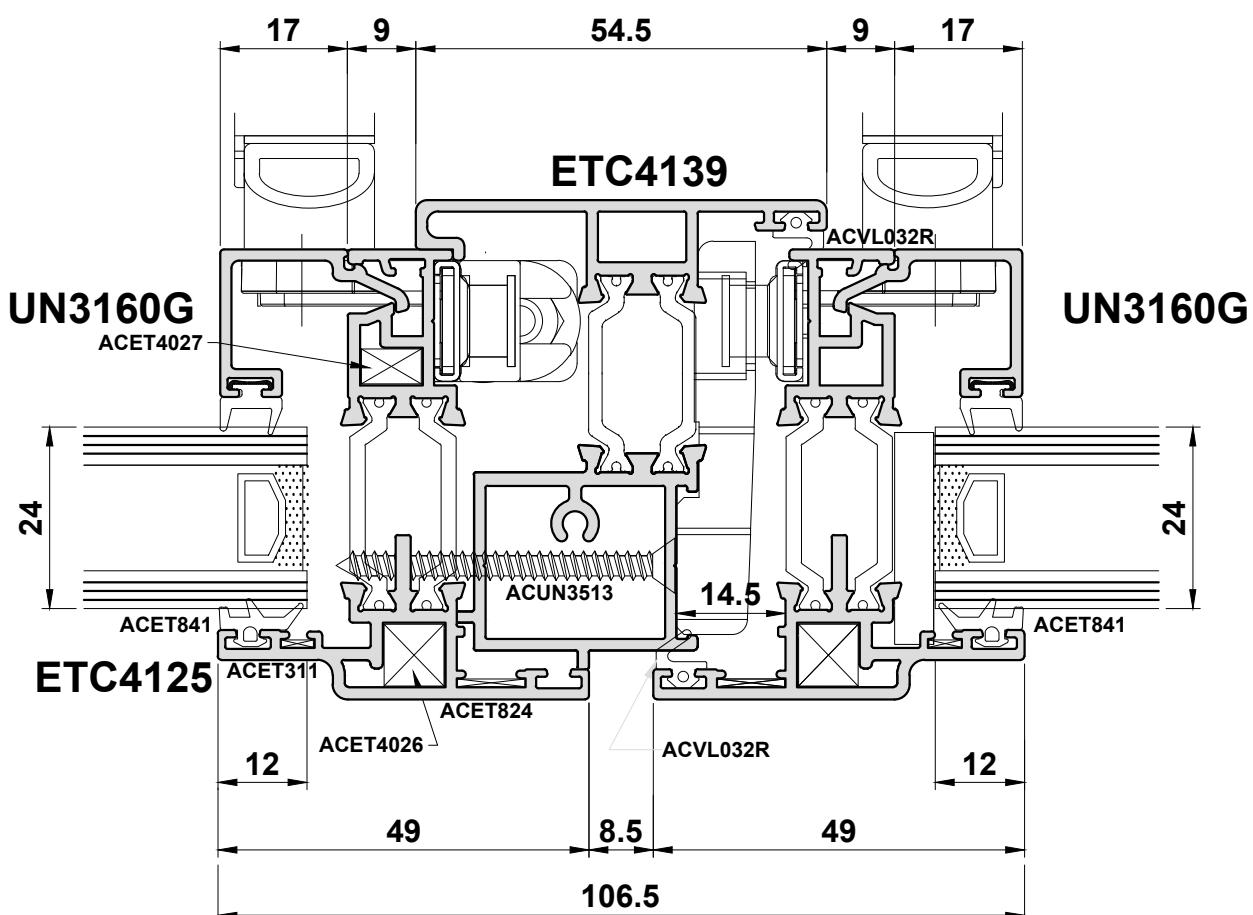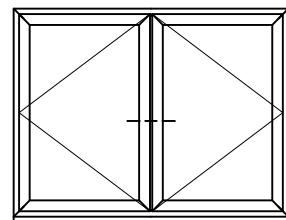



Do Not Scale From This Drawing

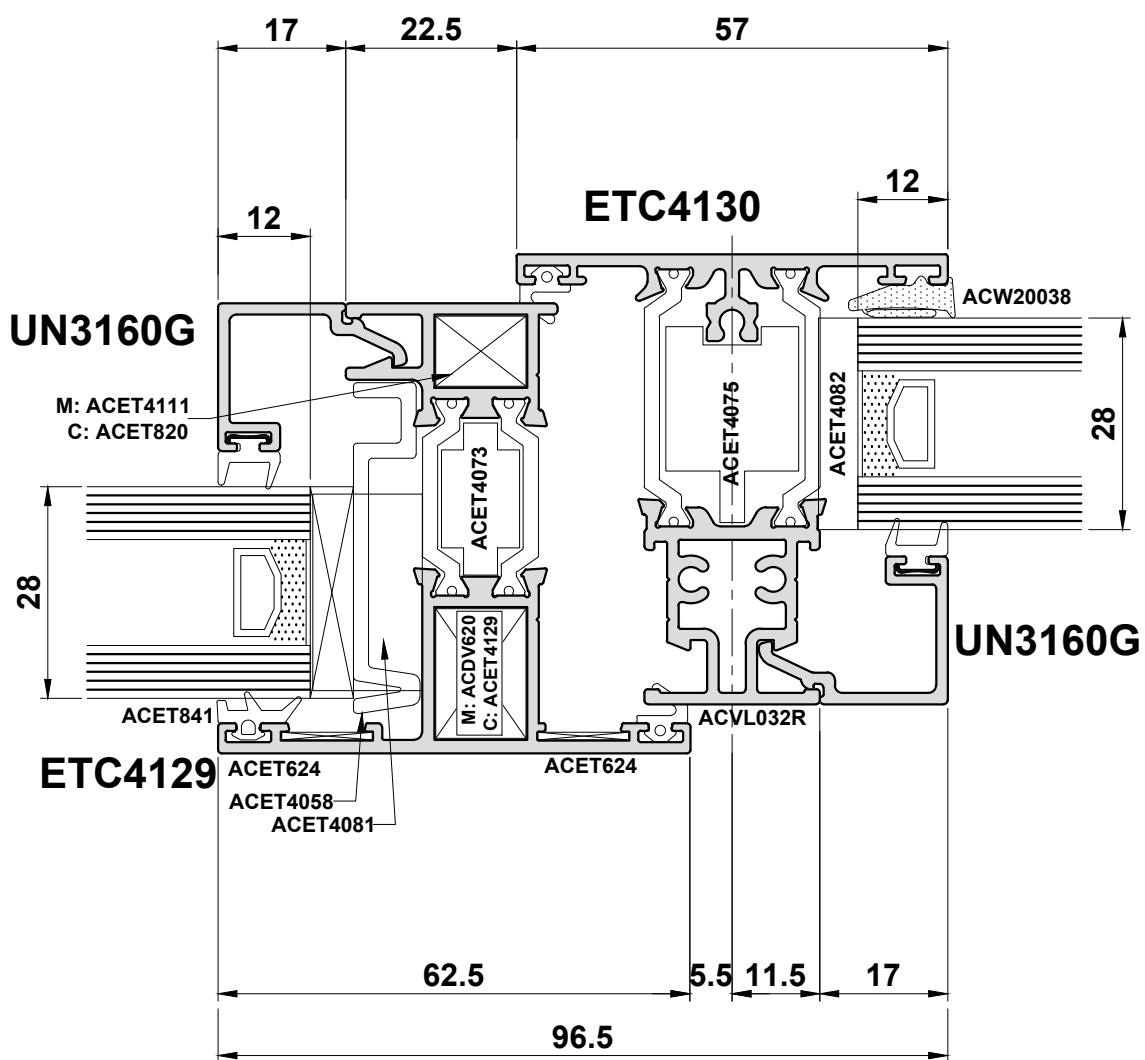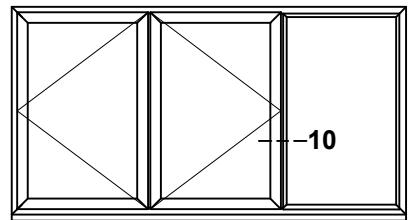

Do Not Scale From This Drawing

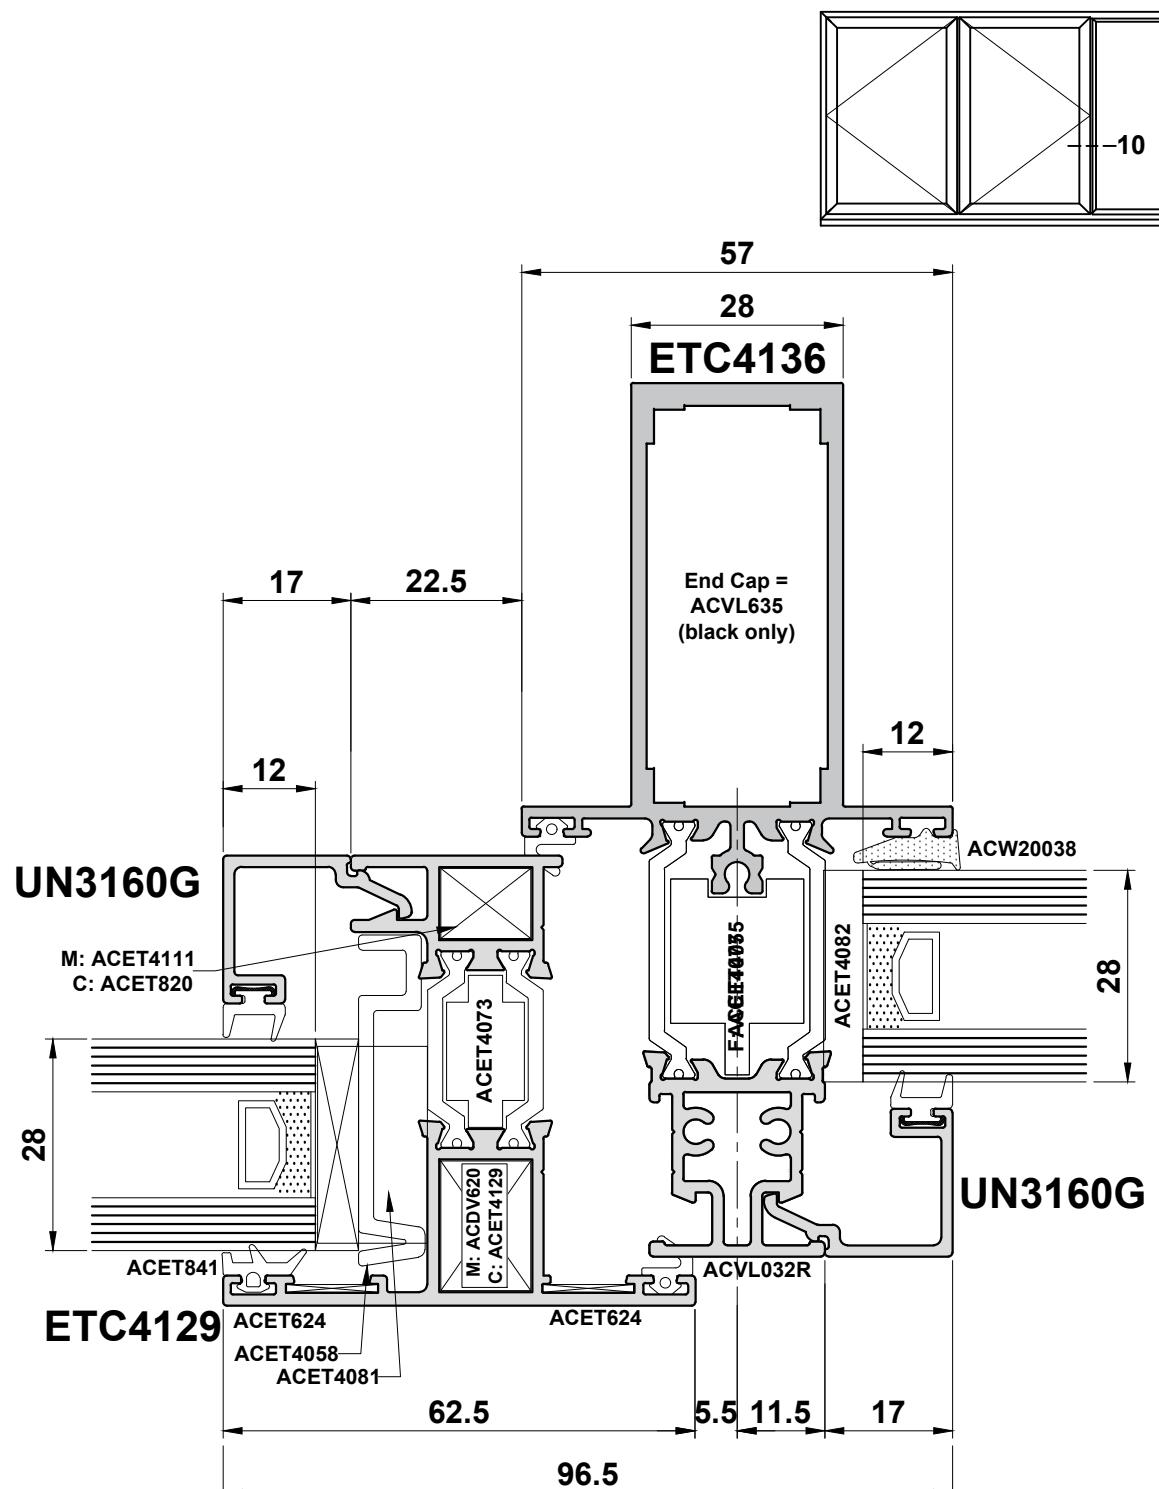

Do Not Scale From This Drawing

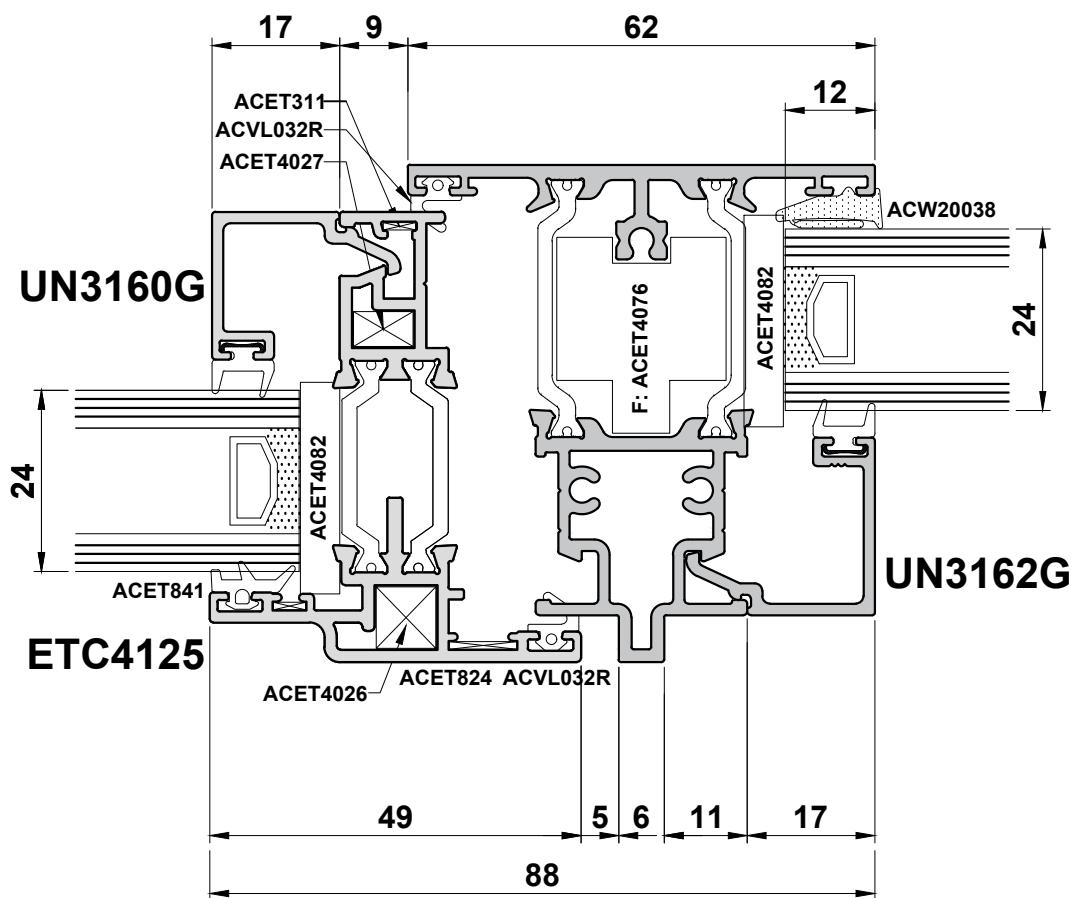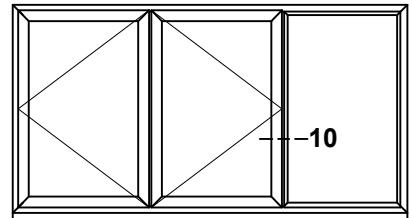

Do Not Scale From This Drawing

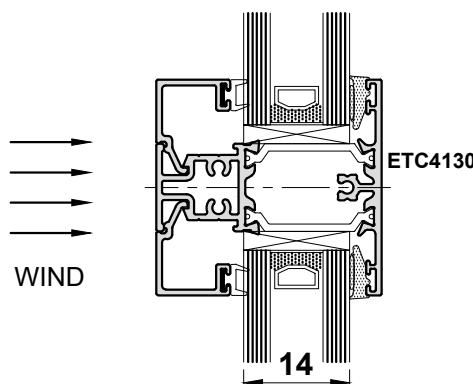
Do Not Scale From This Drawing

Section D

Statics


**General Size Limitations are shown on Page A06.
Please also consider maximum limits of accessories.**

**For Wind Loading Limitations, Please Contact
The Technical Department - T: 01934 833100**



The position of the axes is an indication for the use and application of the moments of inertia (I_x and I_y) and the section modulus (W_x and W_y). We always choose the values of the axis perpendicular to the load to resist it.

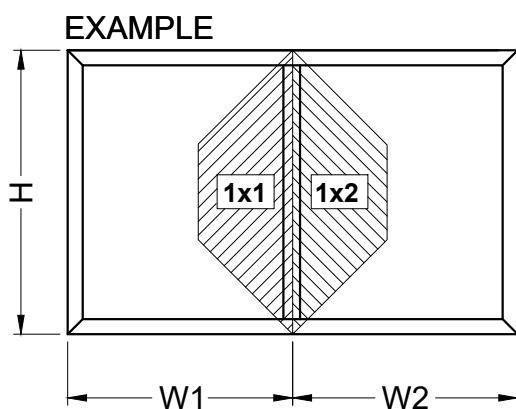- To resist the wind loads we use the values I_x and W_x .



$H = 175\text{cm}$

$W_1 = 120\text{cm}$

$W_2 = 100\text{cm}$

$P = 1250 \text{ Pa}$ (wind pressure)

- 1) Determine I_{xx} value for the stiles (if required) using the Specification Wizard

$I_{xx} = 21.0 \text{ cm}^4$

- 2) Determine suitability

OK

Number	Picture	$I_x(\text{cm}^4)$ $w_x(\text{cm}^3)$	$I_y(\text{cm}^4)$ $w_y(\text{cm}^3)$
ETC4130		19.39 --- 5.84	4.66 --- 1.63
ETC4135		23.74 --- 6.30	6.51 --- 2.11
ETC4136		95.03 --- 15.97	9.13 --- 3.21

Section E

E | **ETC**

Construction Drawings


Corner Joint Details.....	E03 - E05
ACET963R & ACET4950 Punch Tools.....	E06
Variable angle Cleats.....	E07
Bead Notching ACVD916.....	E08
Drainage.....	E09 - E11
Angled Sub Cill.....	E12
Transom/Mullion Fixing Details.....	E13 - E18
ETC4132 & ETC4133 Dummy Transoms.....	E19
Friction Hinge Details.....	E20 - E22
ACET4050 Hinge Details.....	E23
Locking Details.....	E24 - E26
French Casement Assembly.....	E27 - E28
Glazing Details.....	E29 - E37
Bay Pole Options.....	E38 - E43
Horizontal Coupler Details.....	E44
Fixing Strap Details.....	E45
Trickle Vent Details.....	E46

Corner Joint Details

To ensure accurate corners, we recommend the use of support blocks (by others) whilst cutting.
Do NOT clamp directly onto the polyamide.

Table 1

KL Colour	Sealant Part Number
Black	ACSILO4BL
White	ACSILO4WP
Clear	ACSILO4CL
KL001	ACSILO4KL001
KL002	ACSILO4KL002
KL003	ACSILO4KL003
KL004	ACSILO4KL004
KL005	ACSILO4KL005
KL006	ACSILO4KL006
KL007	ACSILO4KL007
KL010	ACSILO4KL010
KL011	ACSILO4KL011
KL012	ACSILO4KL012
KL013	ACSILO4KL013

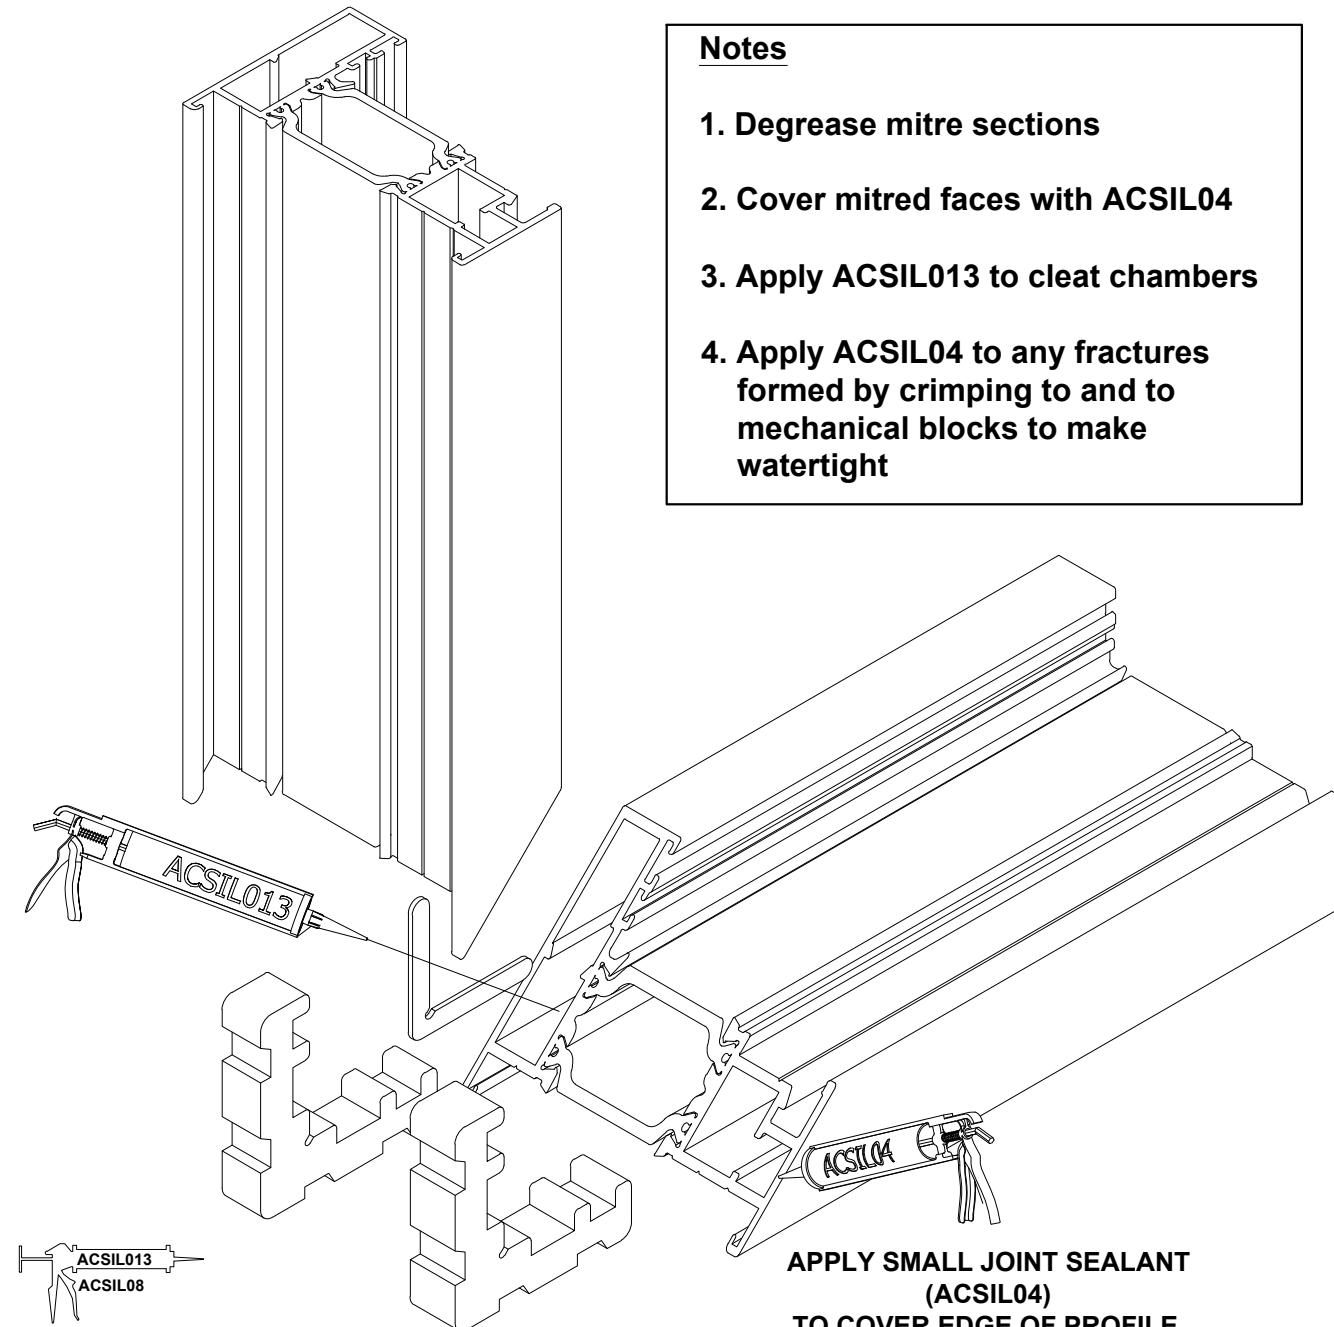

Notes


1. Degrease mitre sections
2. Cover mitred faces with ACSILO4
3. Apply ACSILO13 to cleat chambers
4. Apply ACSILO4 to any fractures formed by crimping to and to mechanical blocks to make watertight

Do Not Scale From This Drawing

Alitherm 400

Corner Crimping without Integrated Gasket

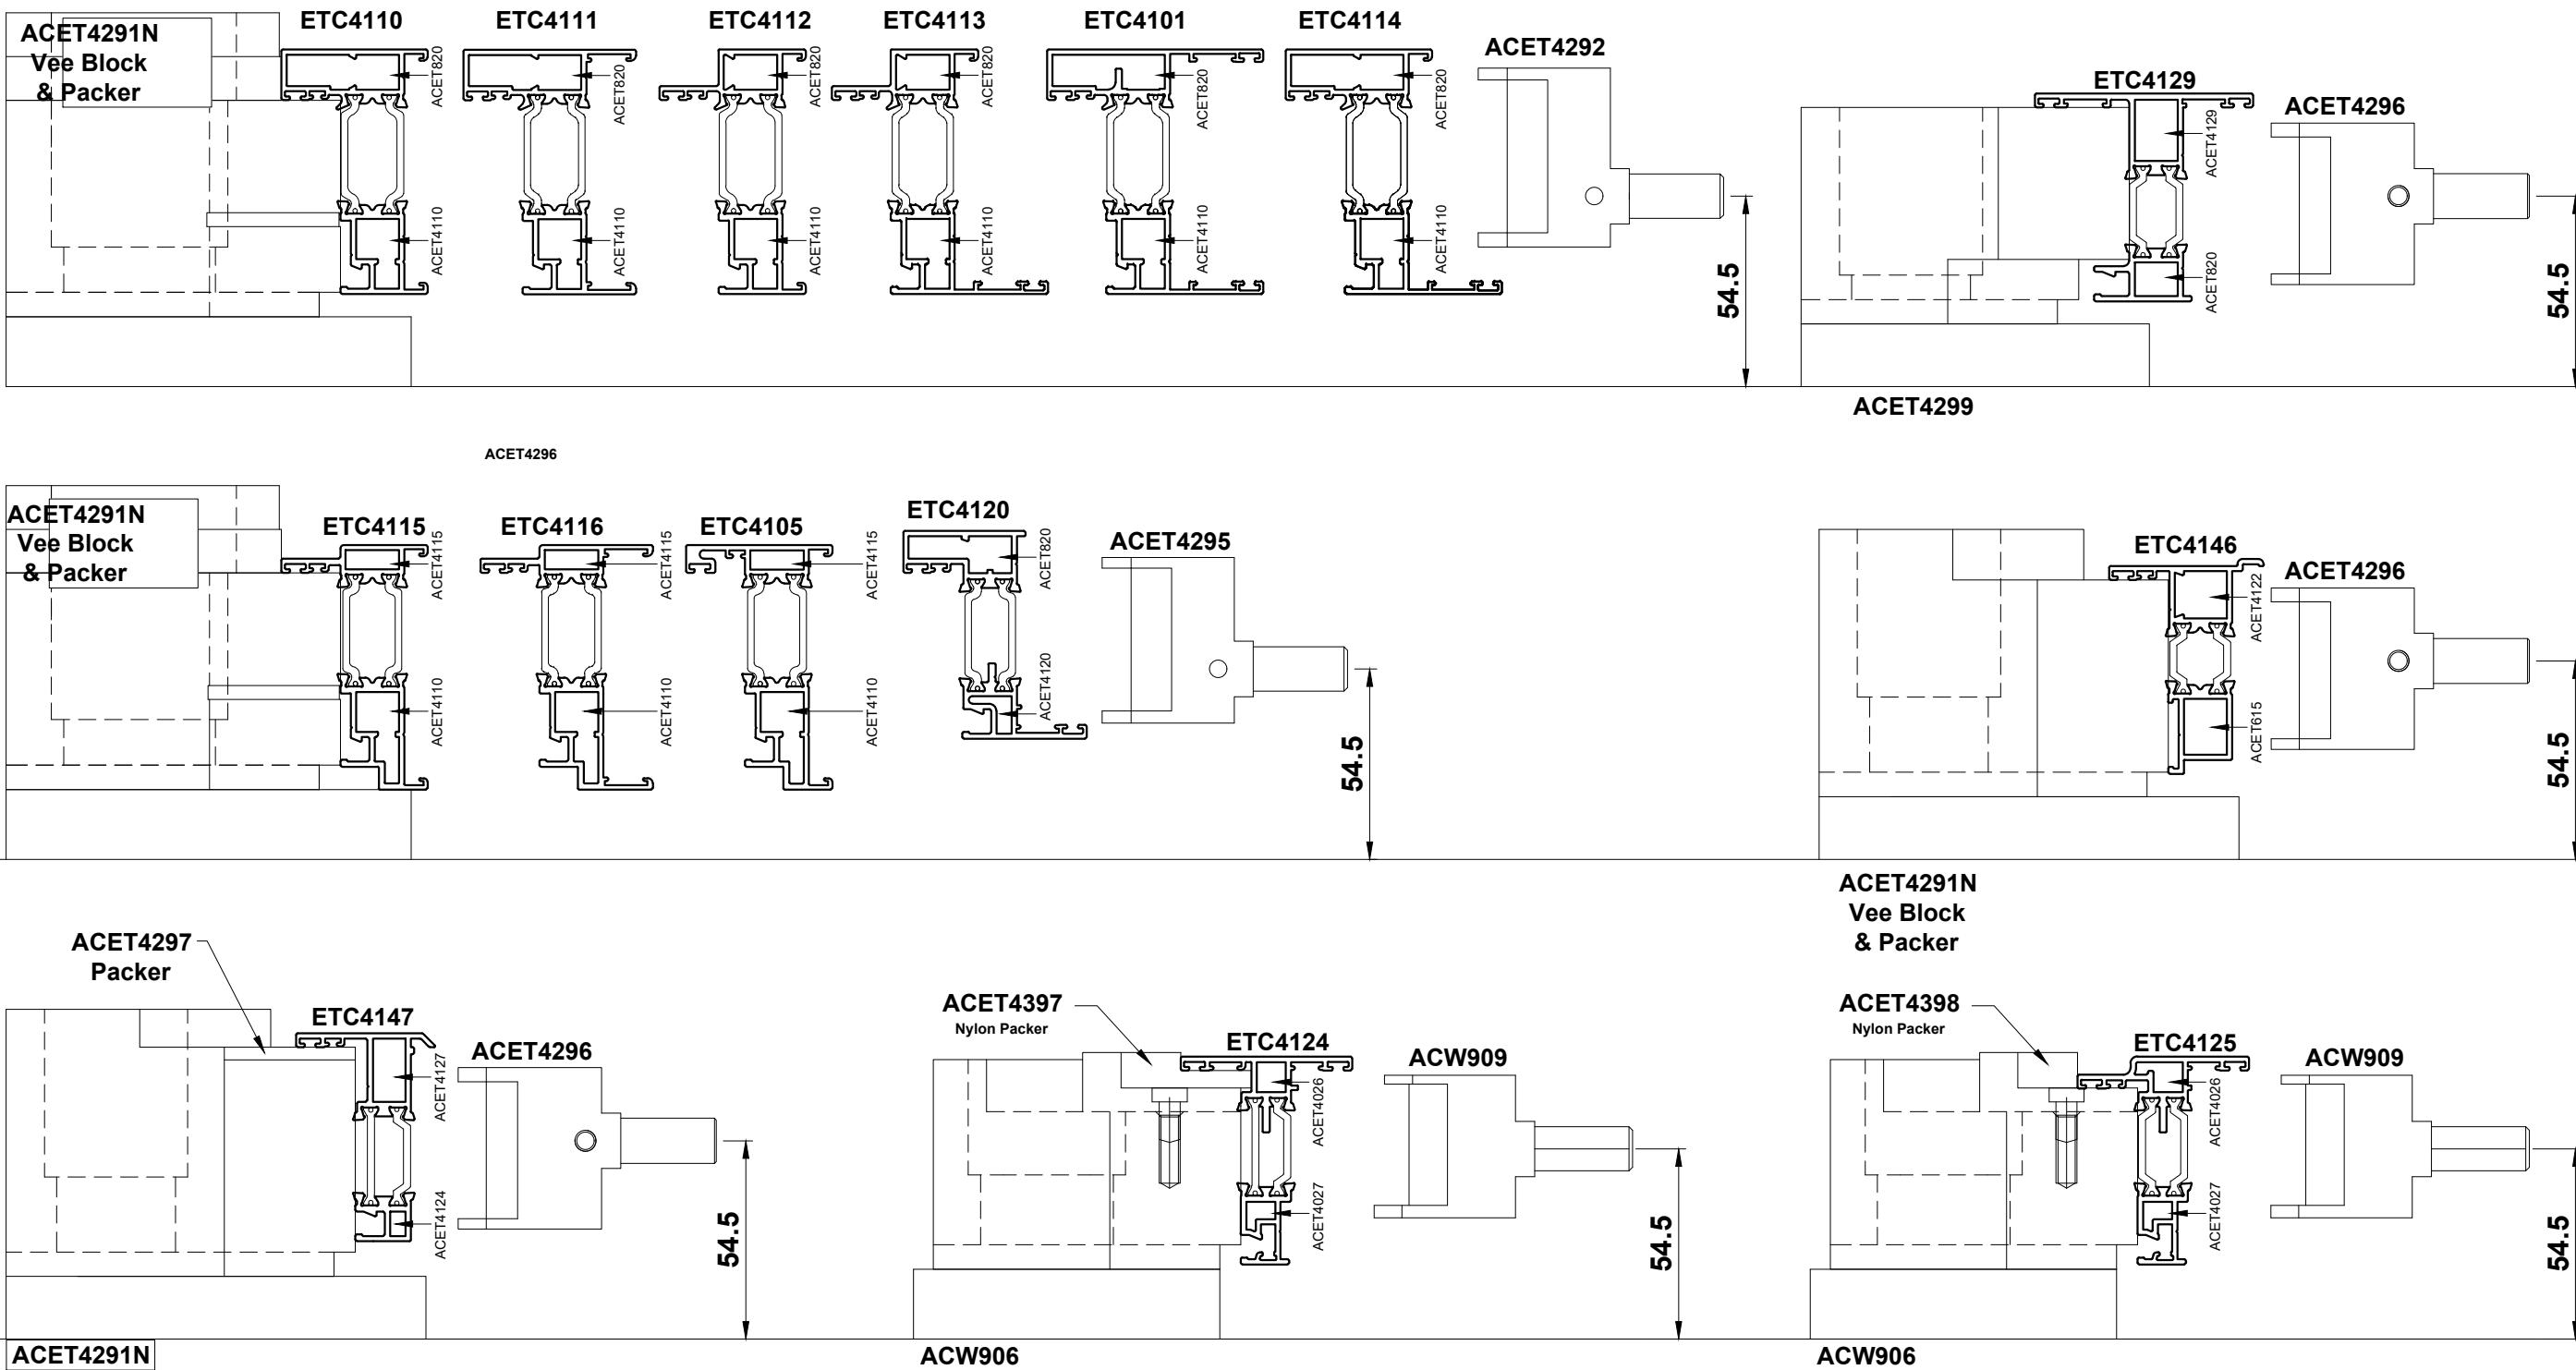
Manual Crimper = WUT024HSZA



Do Not Scale From This Drawing

Corner Crimping with Integrated Gasket




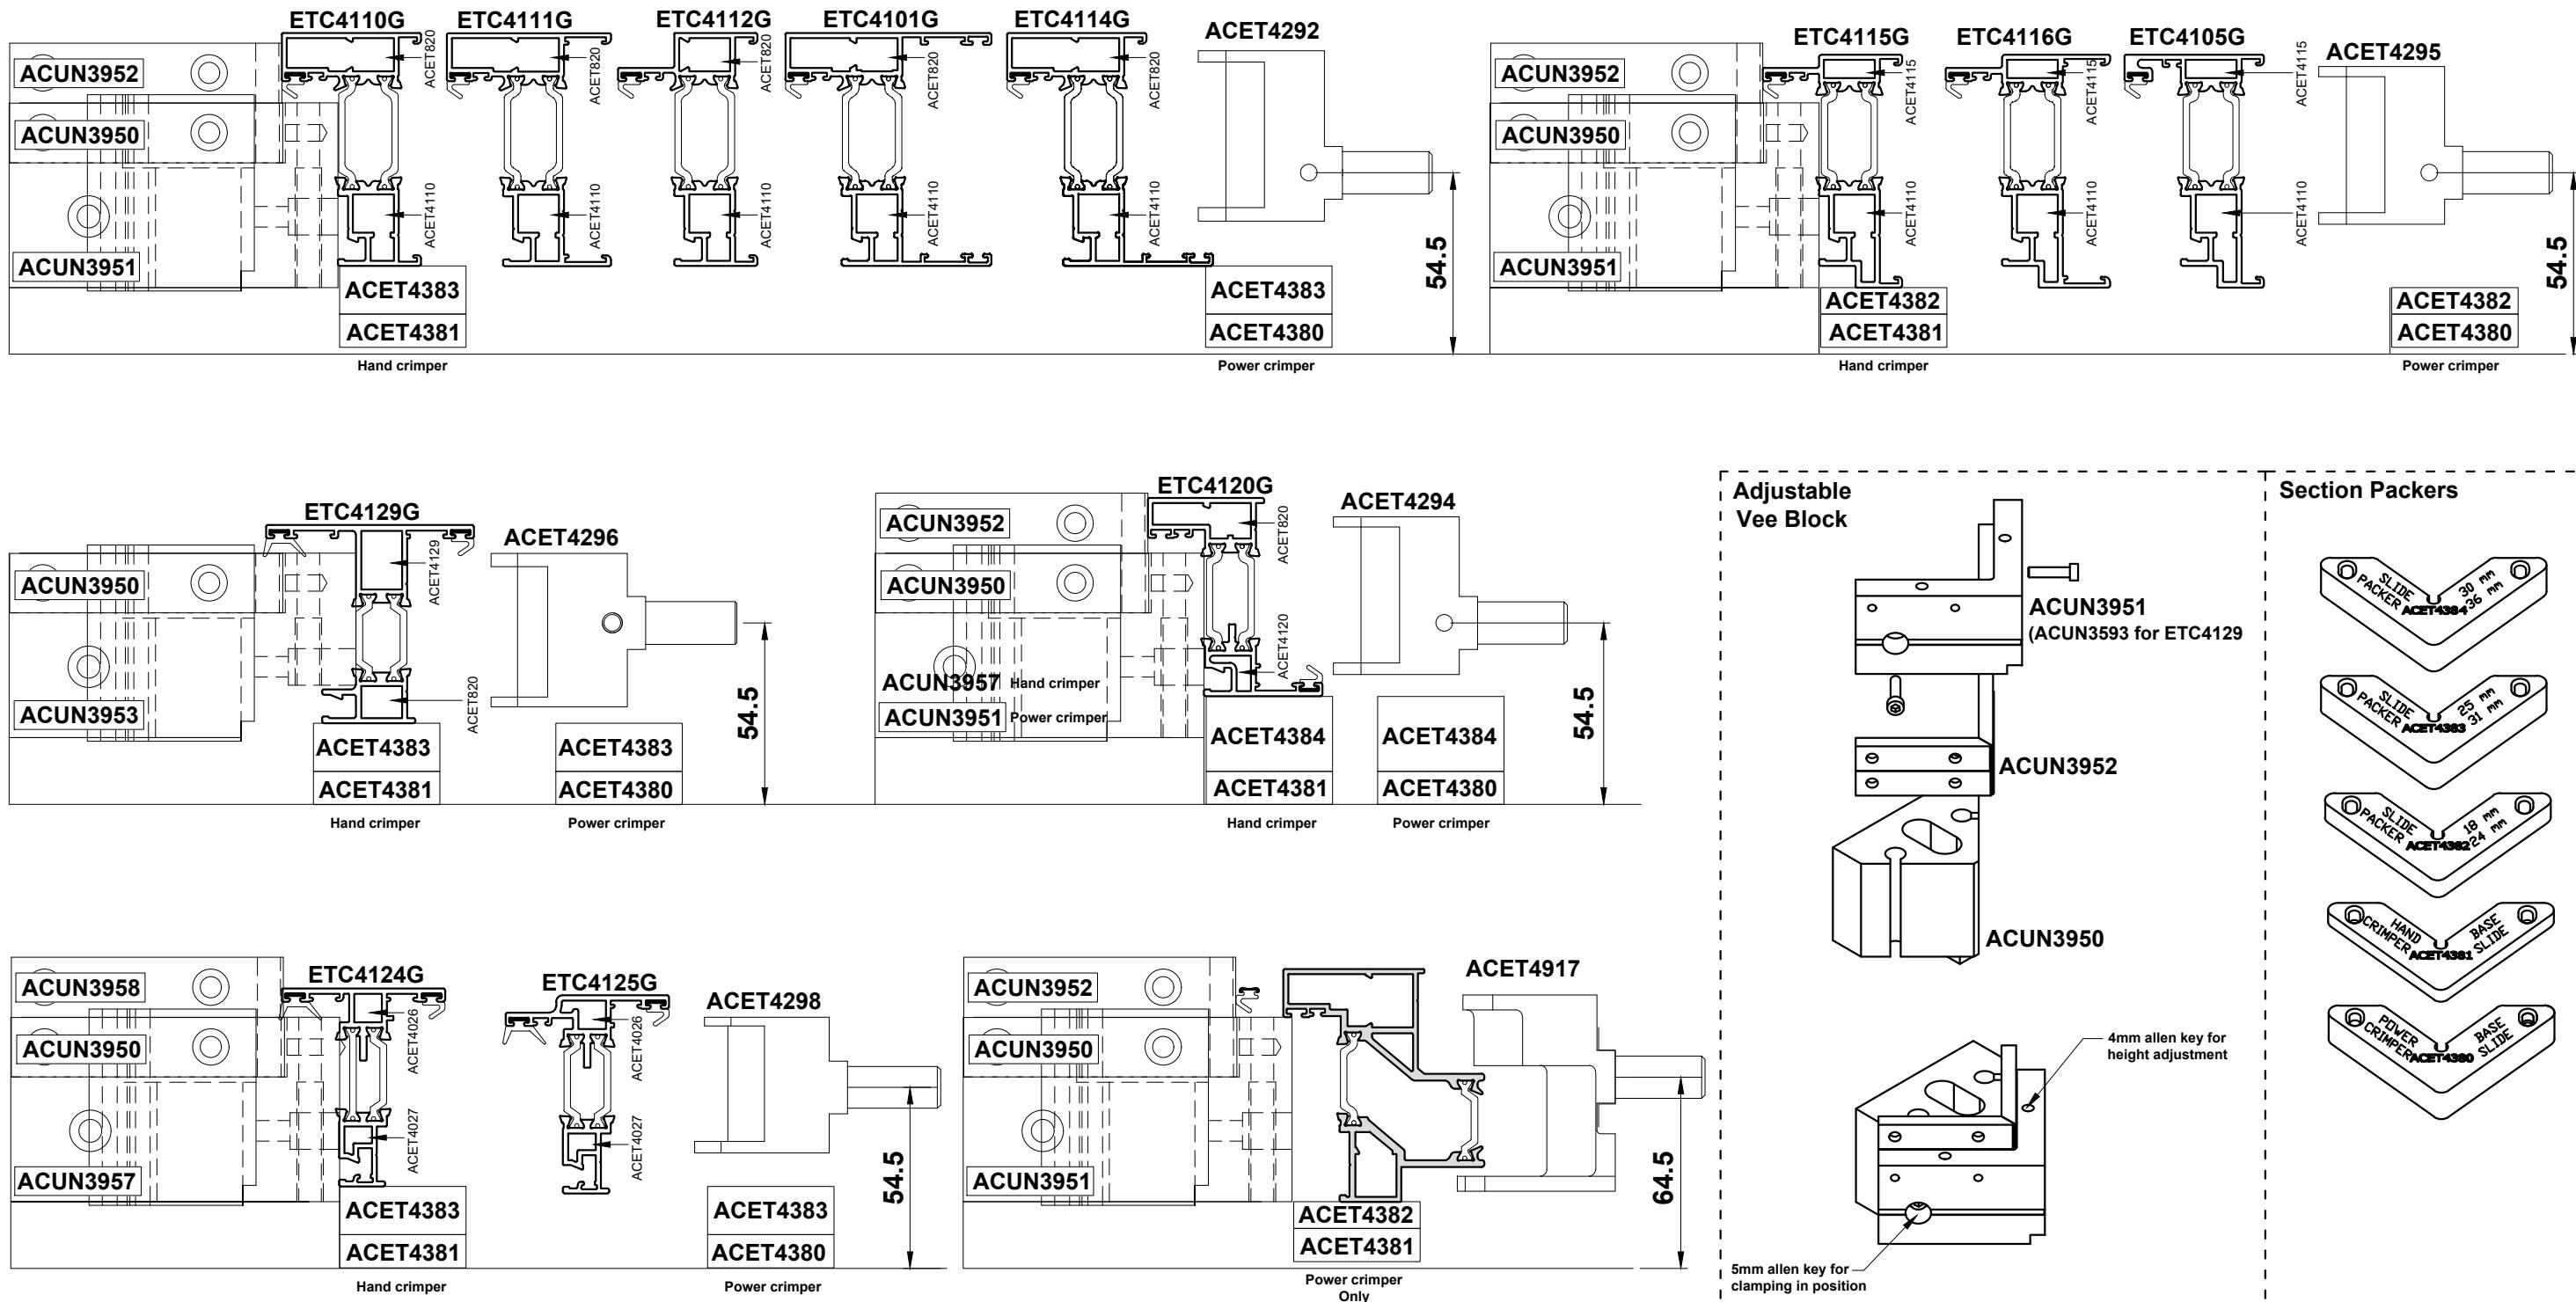
Manual Crimper = WUT024HSZA
Power Crimper = ACCR100




Do Not Scale From This Drawing

Alitherm 400

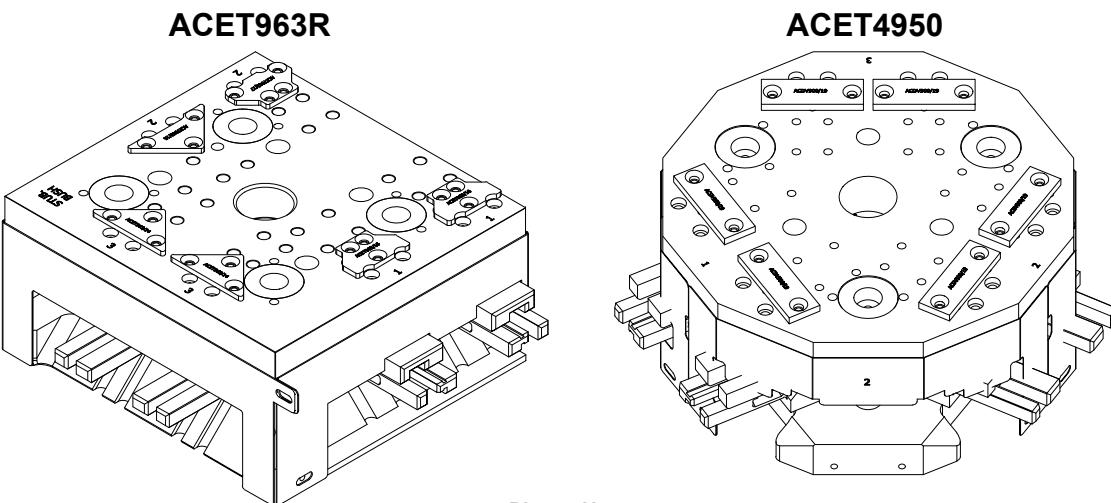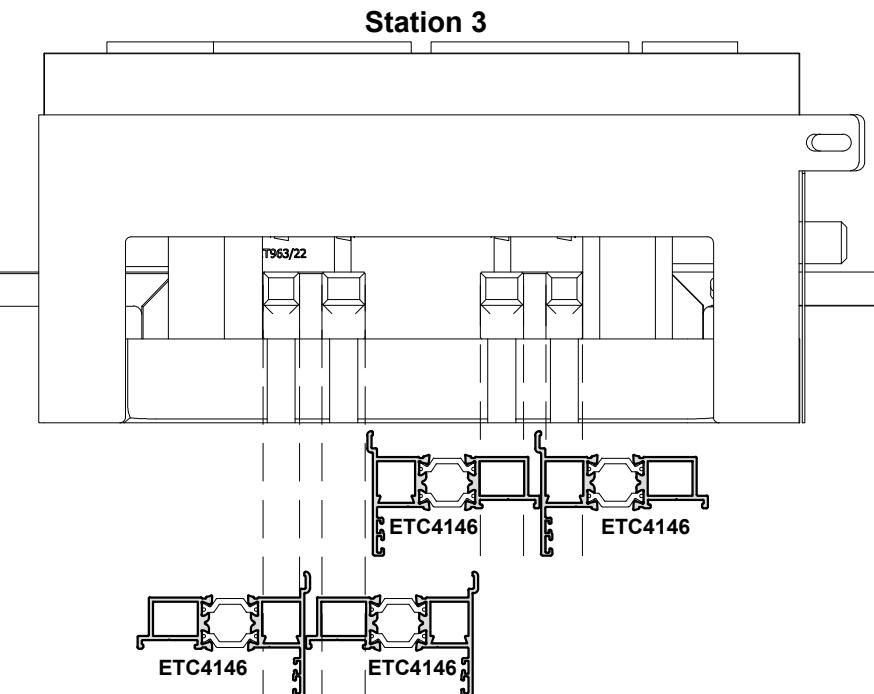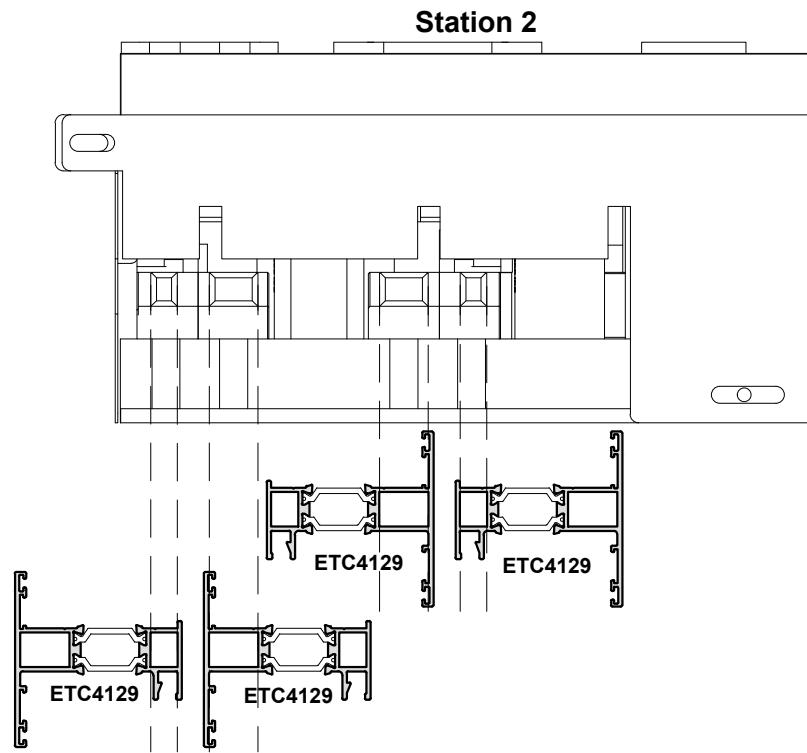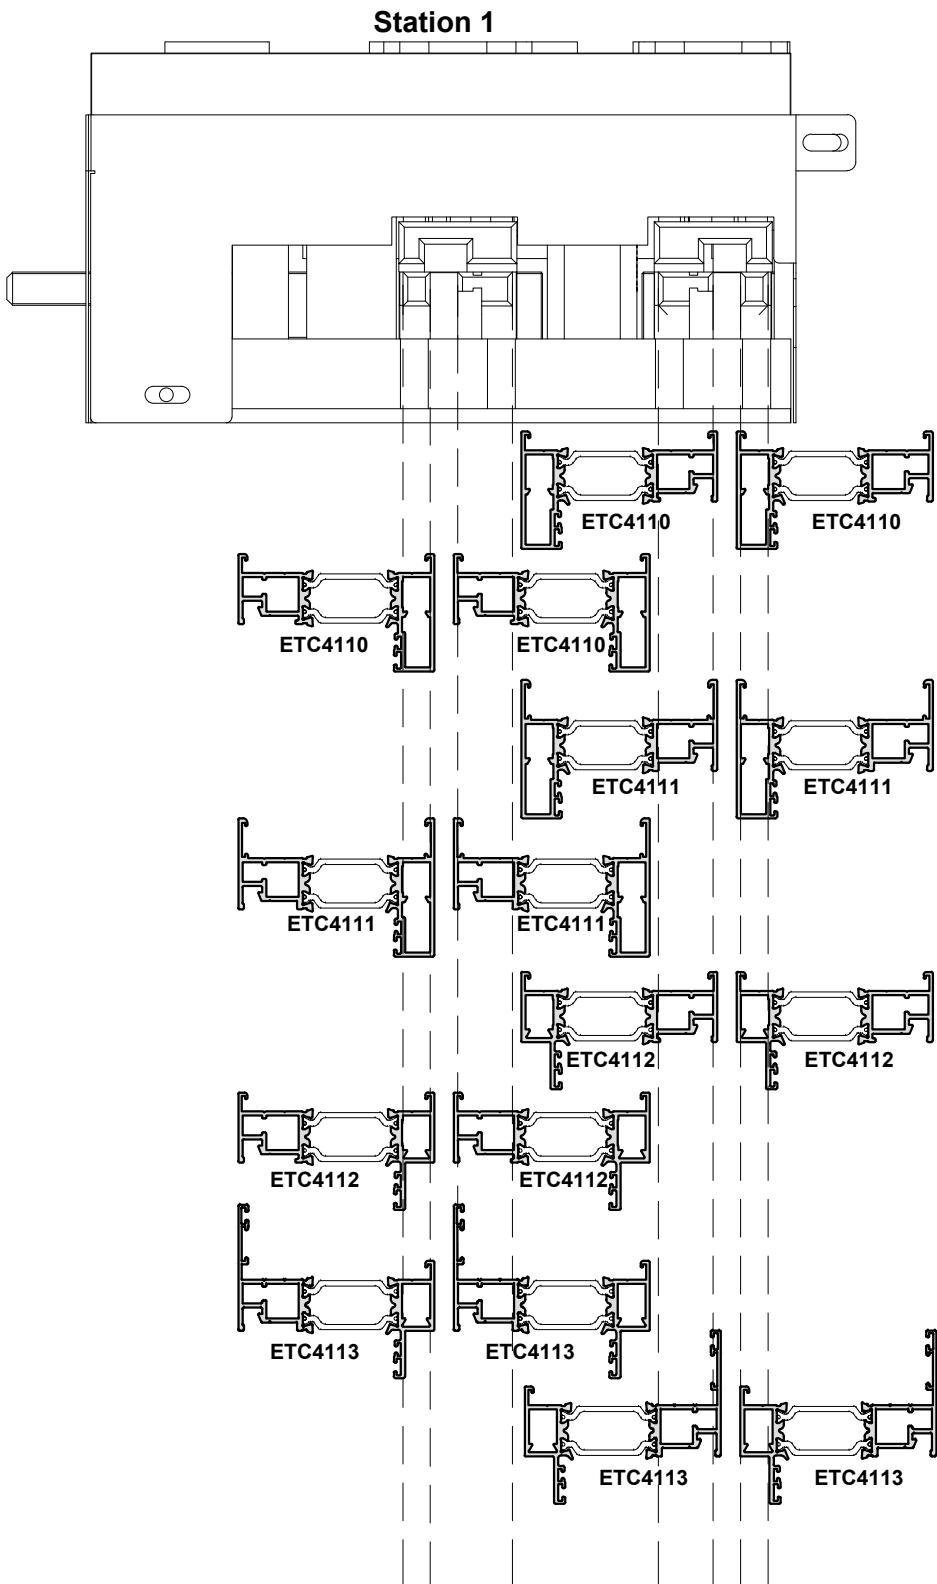ACET963 Punch Tool




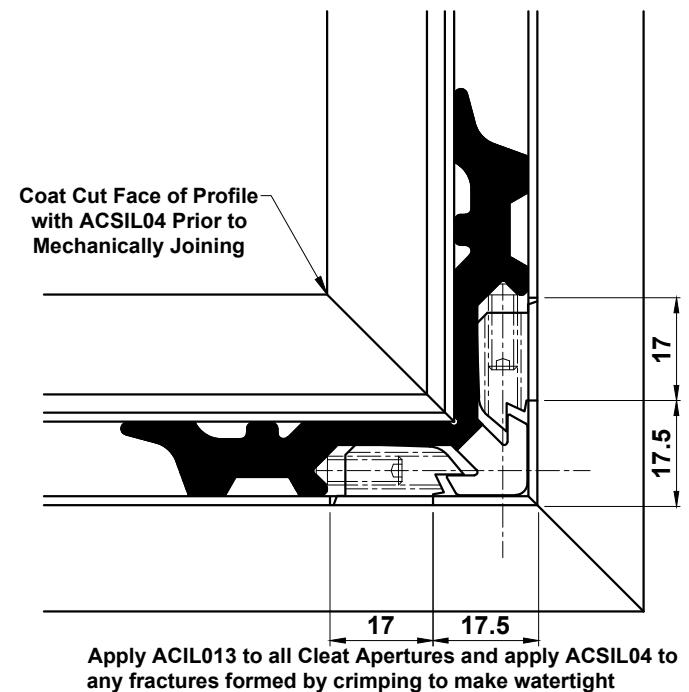Please Note
The following profiles are not compatible with ACET963R or ACET4950:
ETC4101, ETC4105, ETC4114, ETC4115, ETC4116, ETC4117, ETC4120,
ETC4124, ETC4125, ETC4147



Do Not Scale From This Drawing

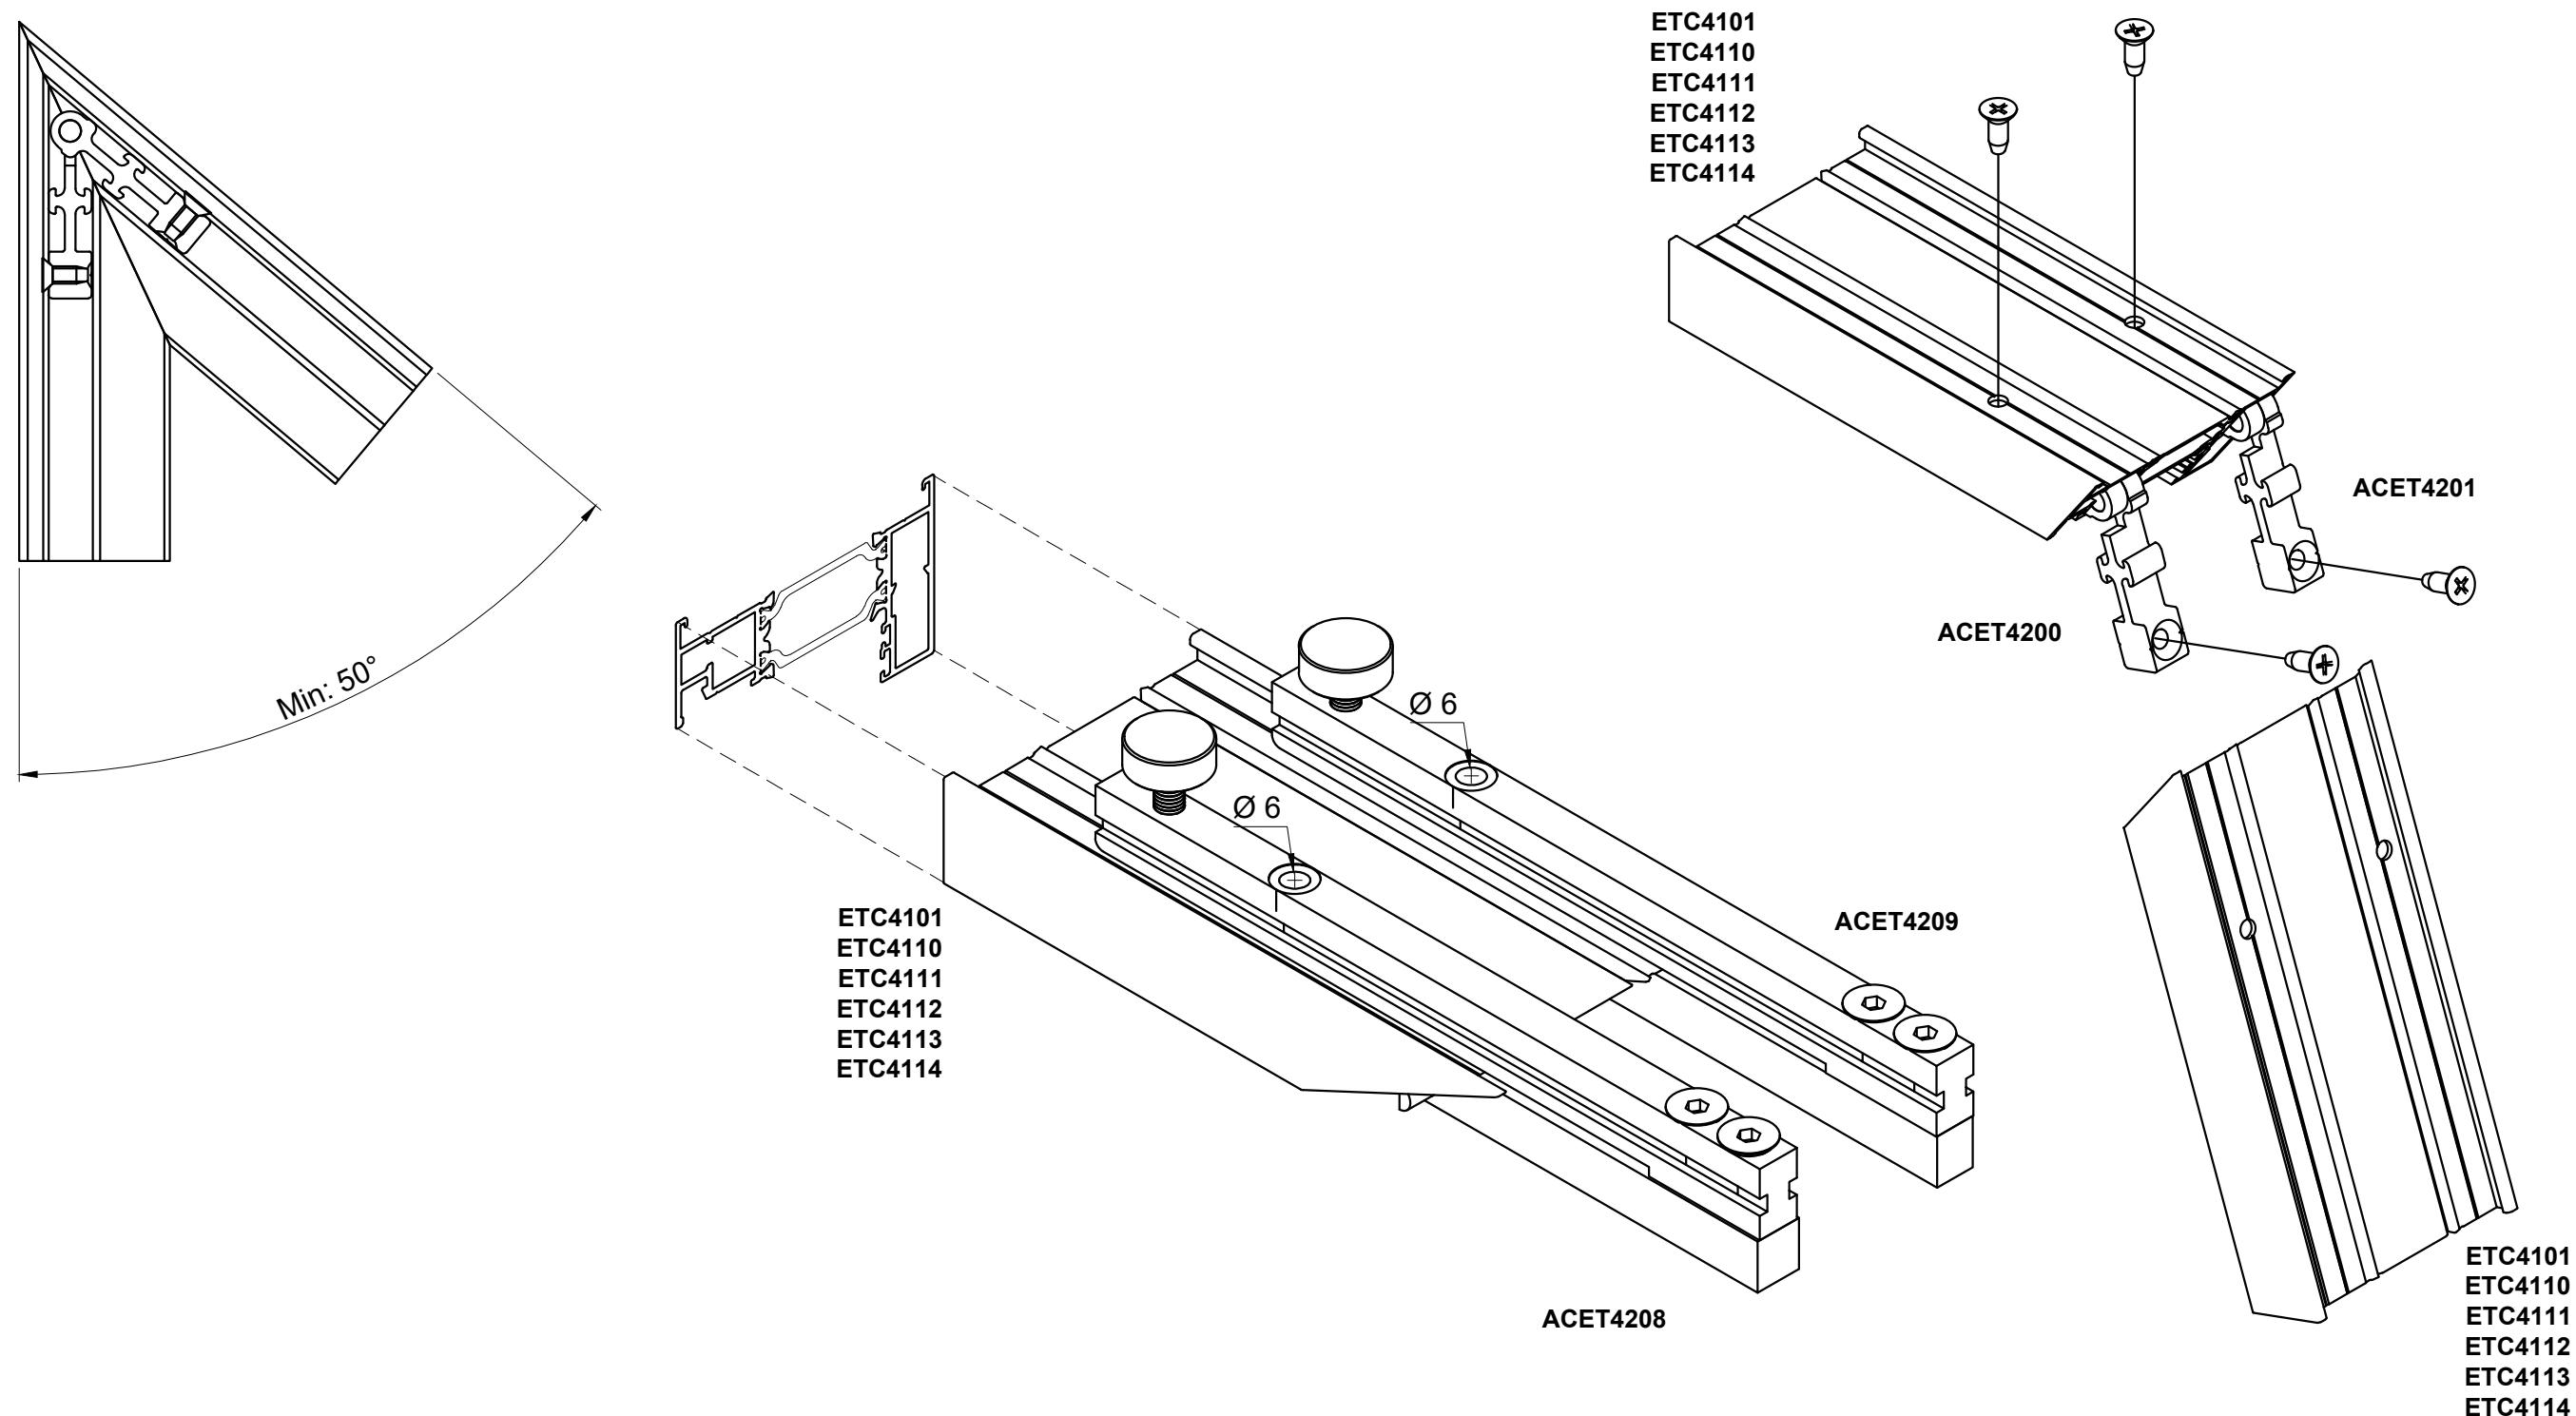Variable Angle Cleats



Do Not Scale From This Drawing

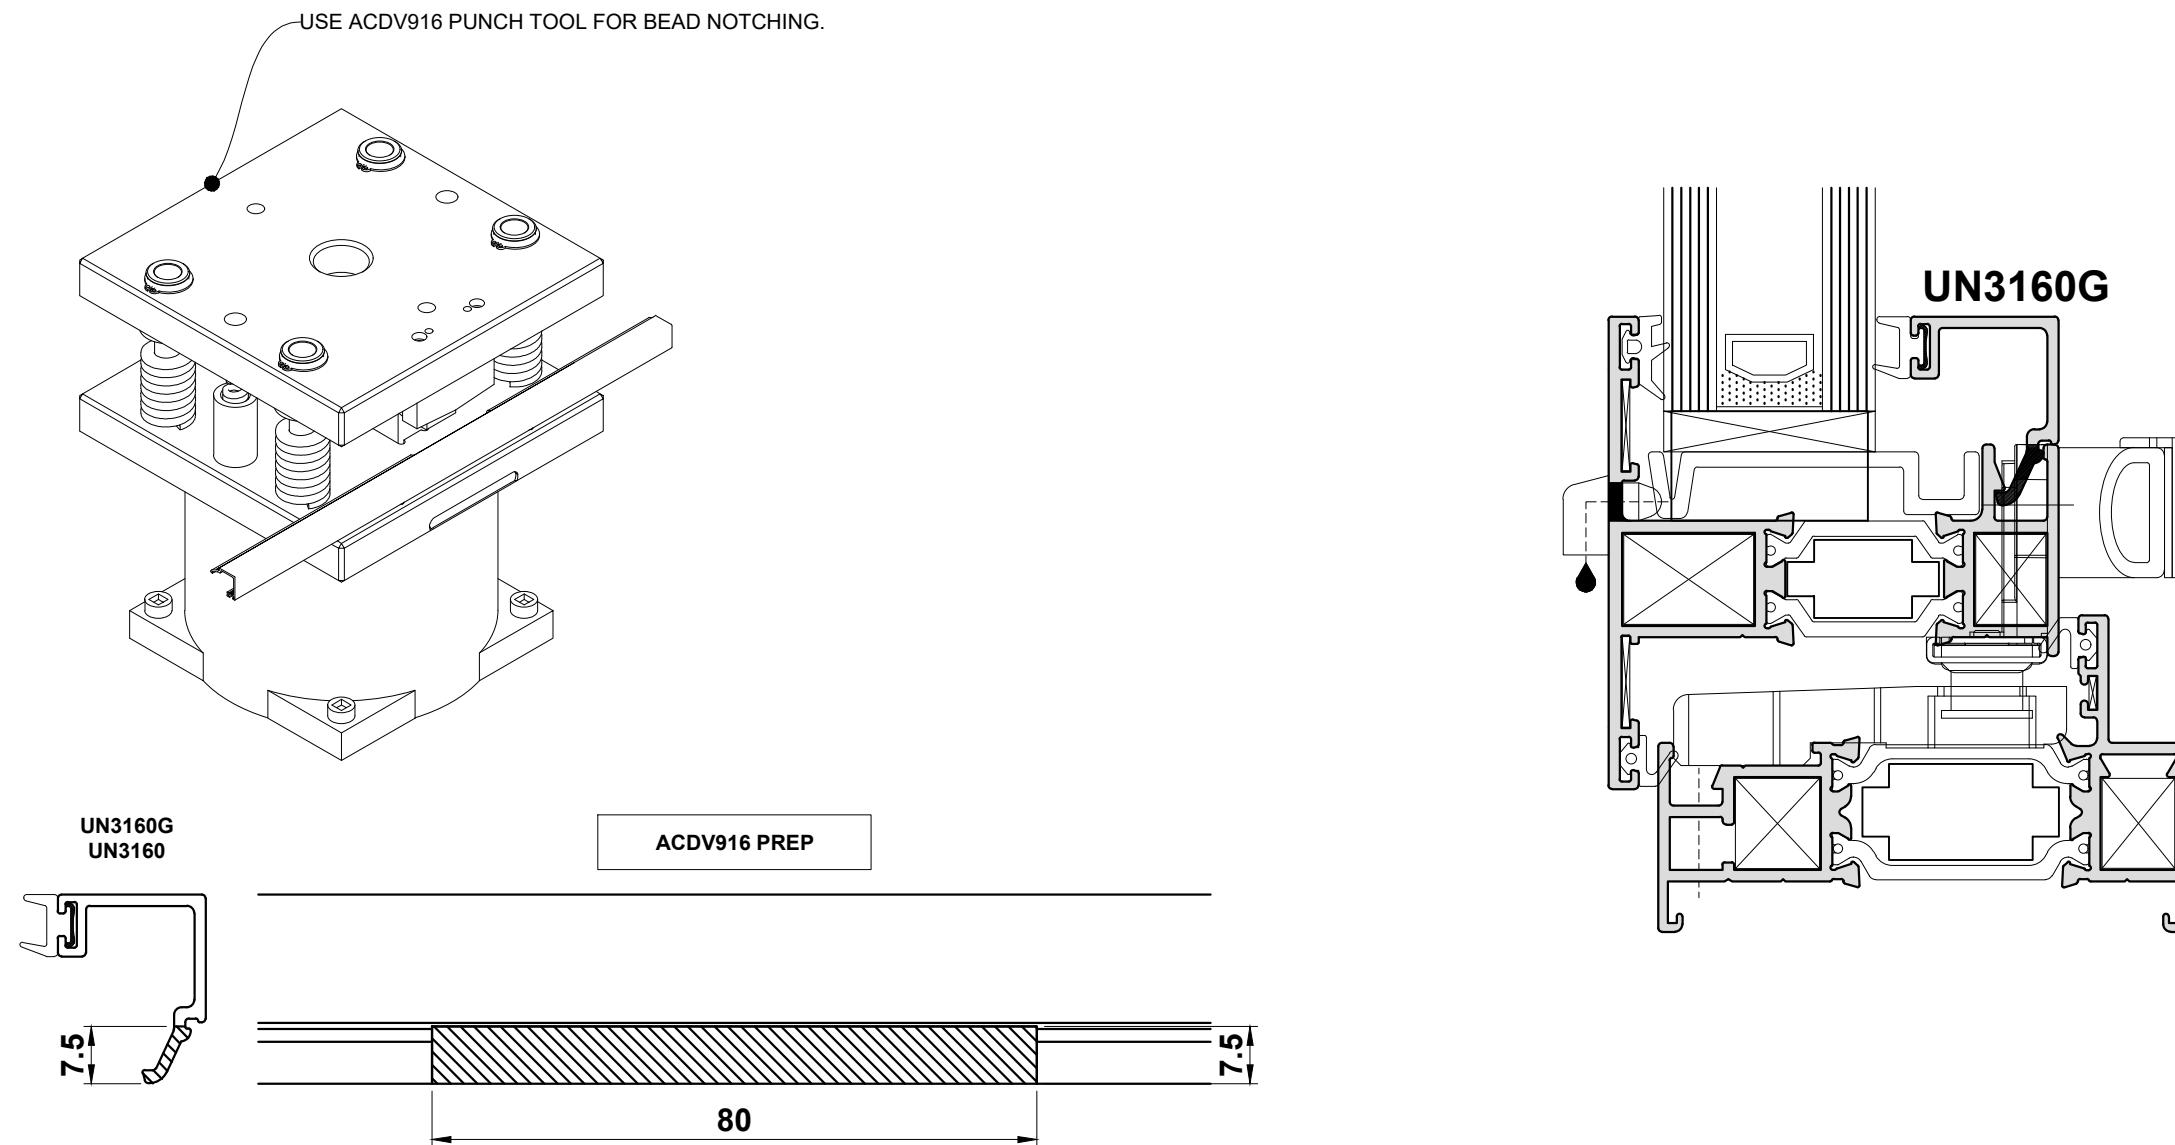
Alitherm 400**Bead Notching ACVD916****LOCK SELECTION NOTES:**

PLEASE FOLLOW TABLE ON PAGE E06 FOR LOCK SELECTION OPTIONS.

ALL SASH / LOCK COMBINATIONS REQUIRE BEAD NOTCHING.



ALL OTHER INTERMEDIATE SHOOTBOLT COMBINATIONS REQUIRE BEAD NOTCHING.

ALL LOCKS & SASHES HAVE BEEN TESTED TO PAS24:2016. PLEASE FOLLOW PAS24:2016 FABRICATION INSTRUCTIONS AND LIMITATIONS.




Do Not Scale From This Drawing

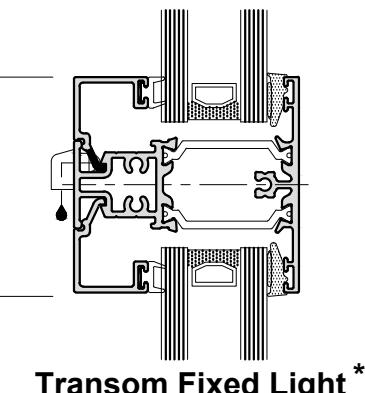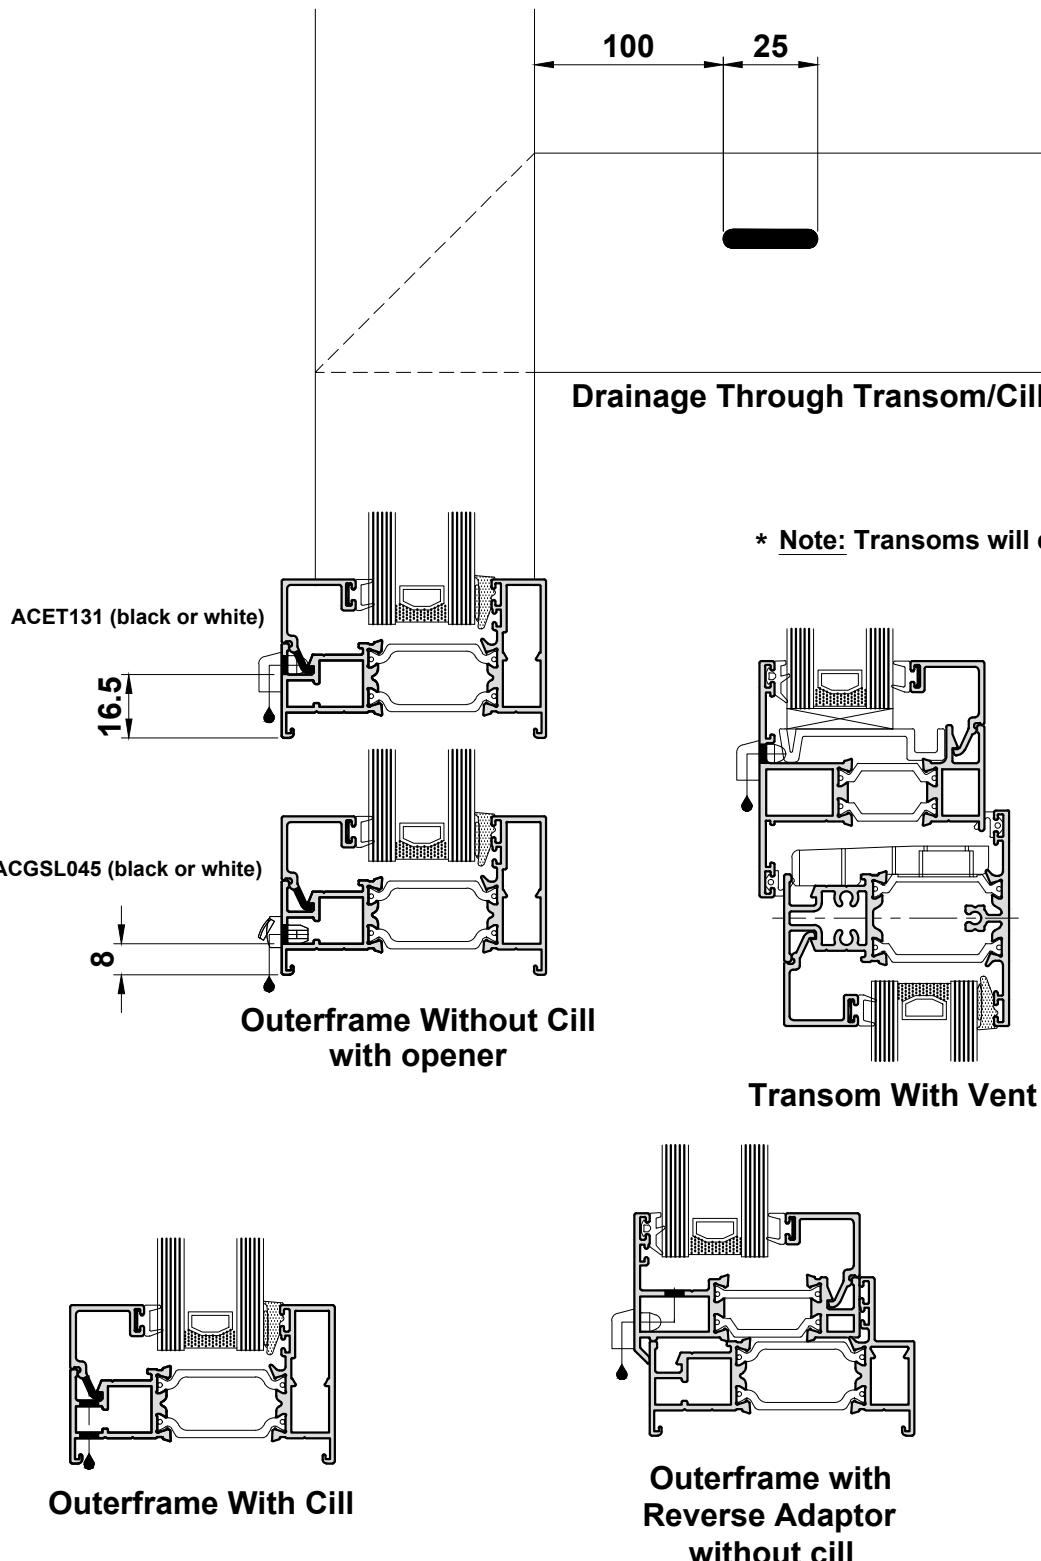
Drainage











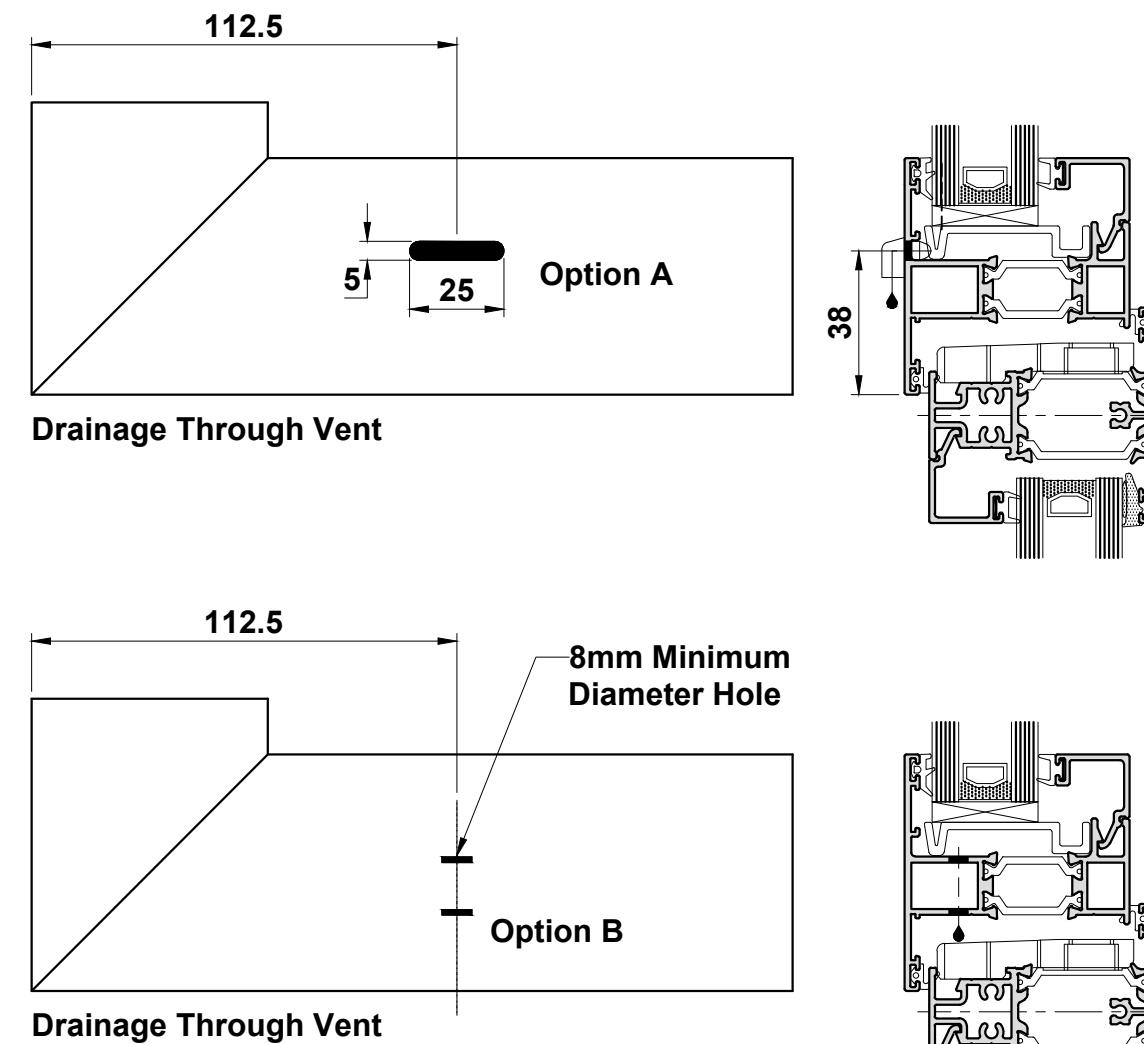
* Note: Transoms will drain through the join to the outerframe.



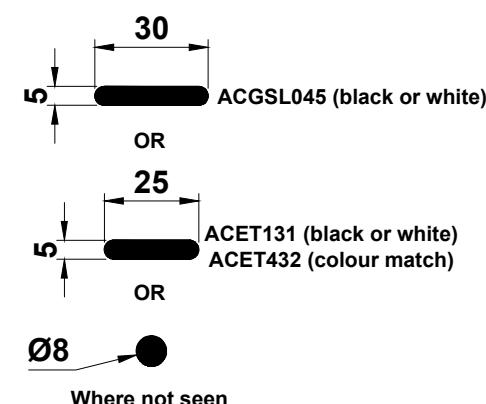
Important Note: All exposed aluminium should be coated using ACSIL014 or painted to match the frame.



Flush Casement Drainage

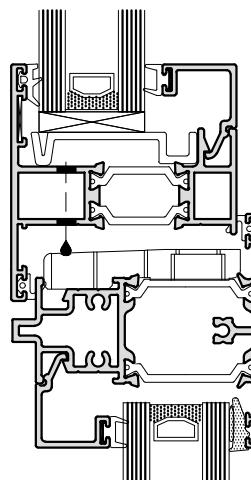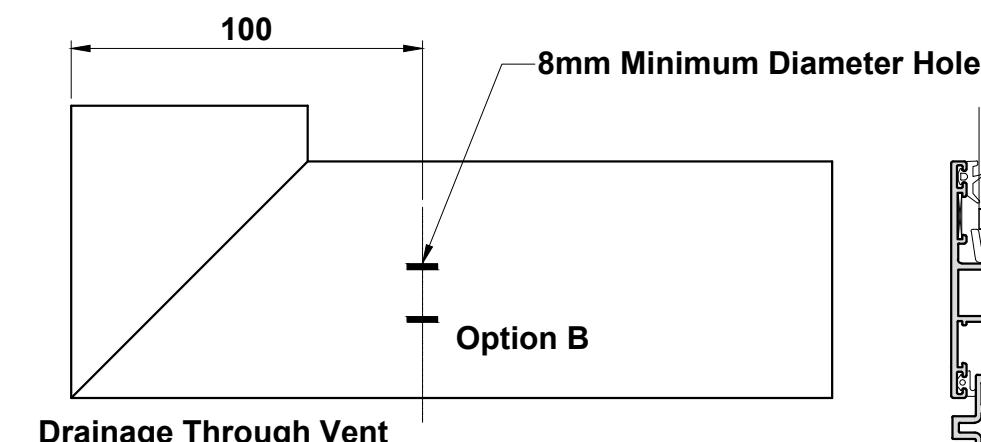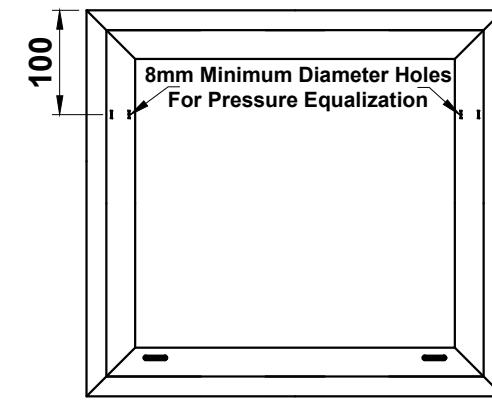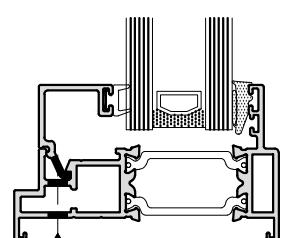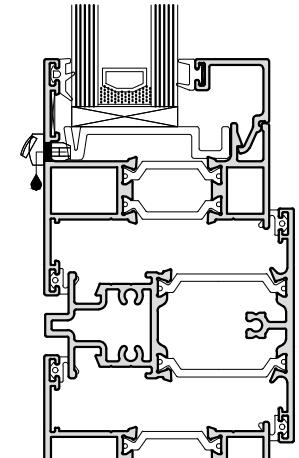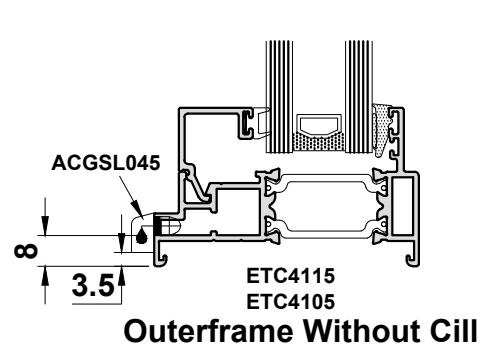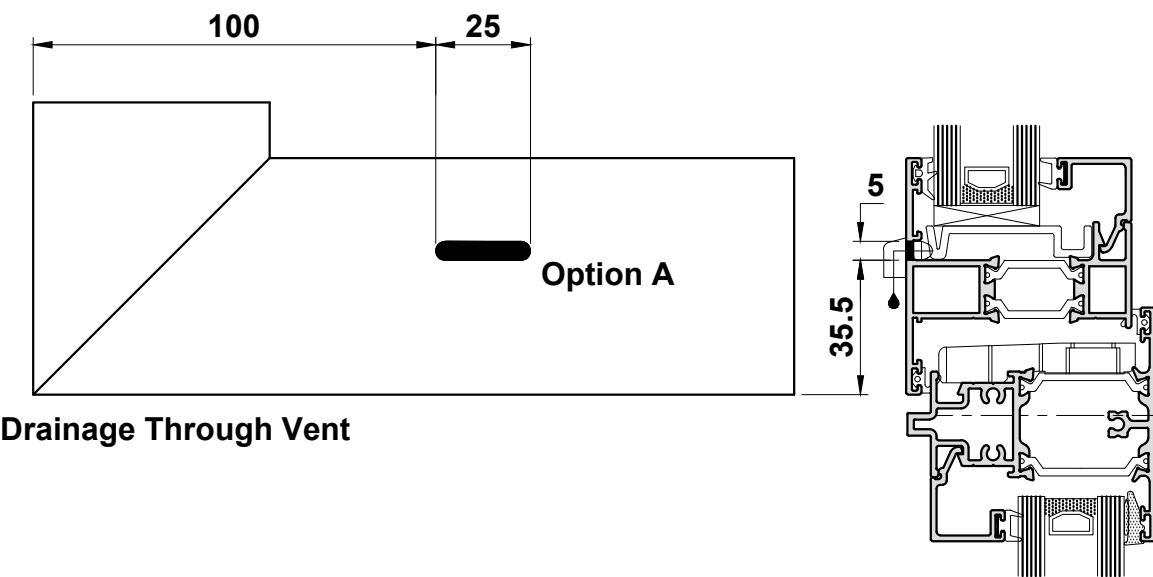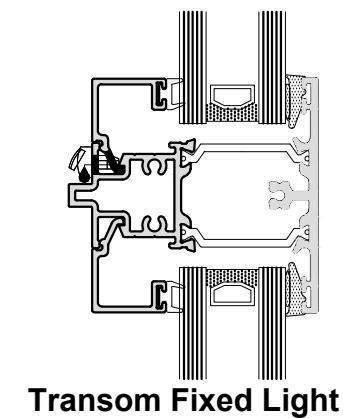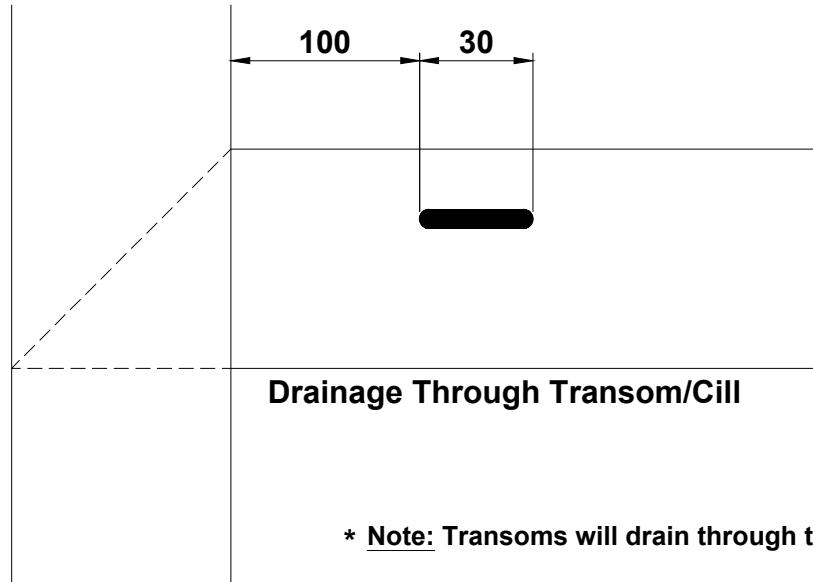

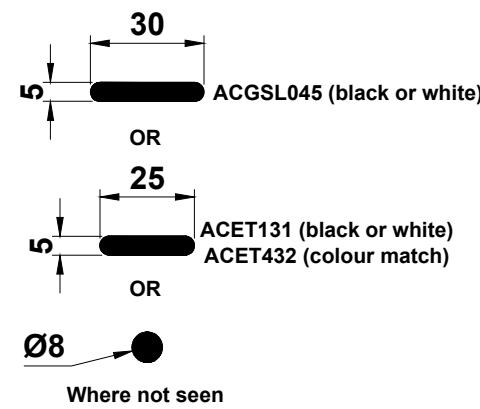
Important Note: All exposed aluminium should be coated using ACSIL014 or painted to match the frame.



Do Not Scale From This Drawing

Sub Cill Drainage


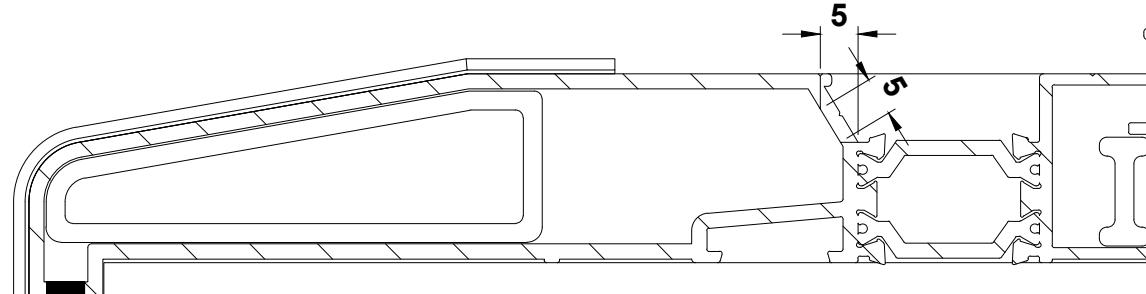
Drainage Option B



Drainage holes to be spaced 100mm in from
each end and at approximately 300mm centres



Ends of cills shall be dammed and
sealed to prevent water egress

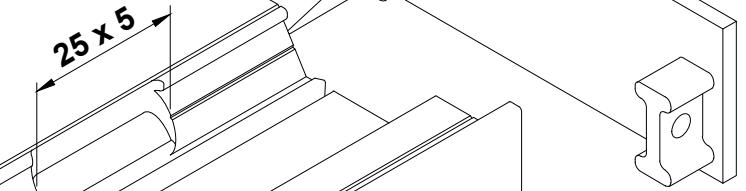Drainage Option B

Drainage Option A
Ø8 min.






Please Note:
Drainage detail
does not apply
to ETC478

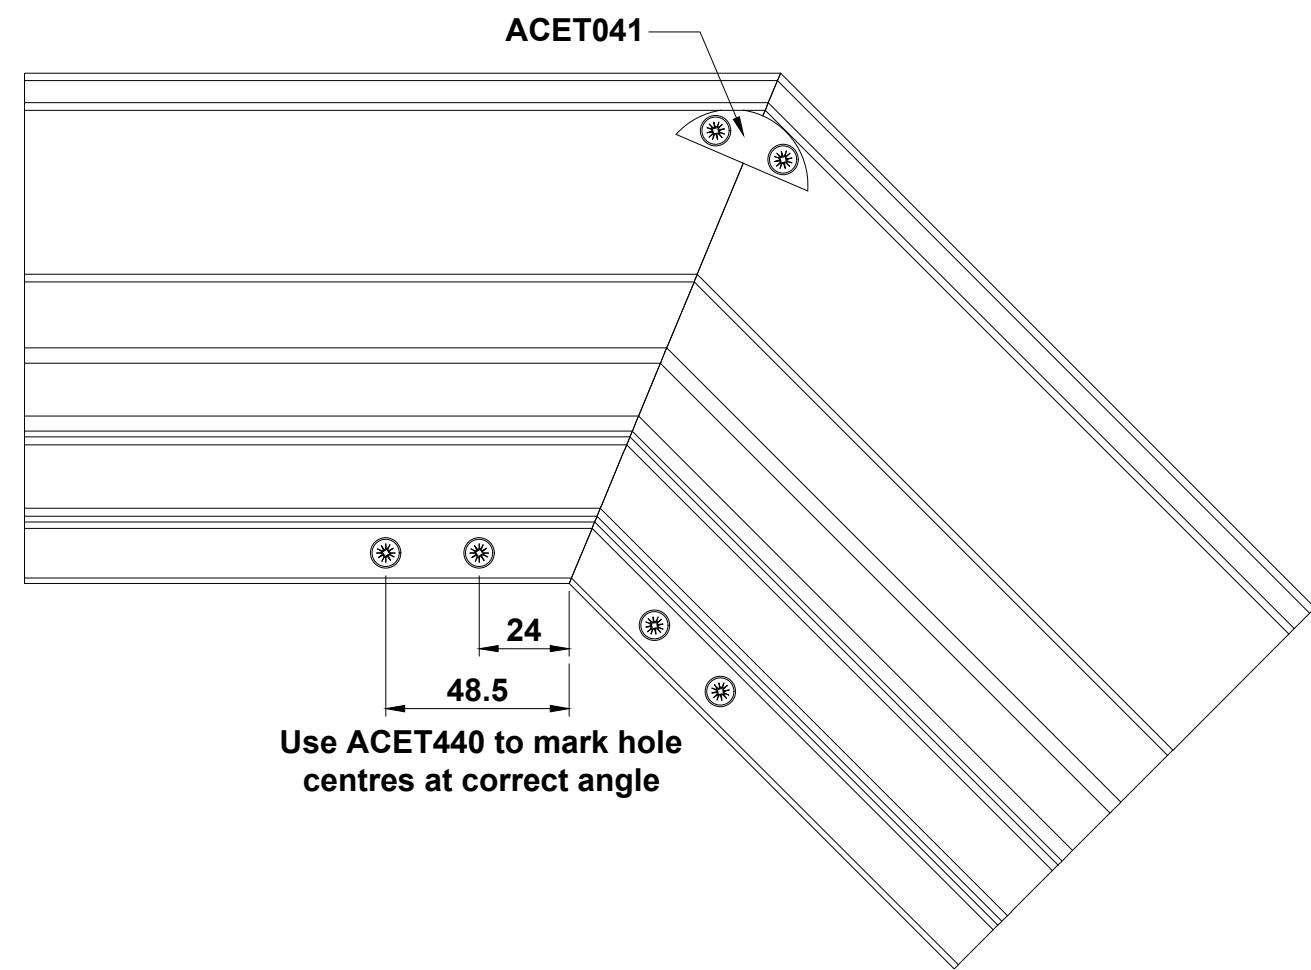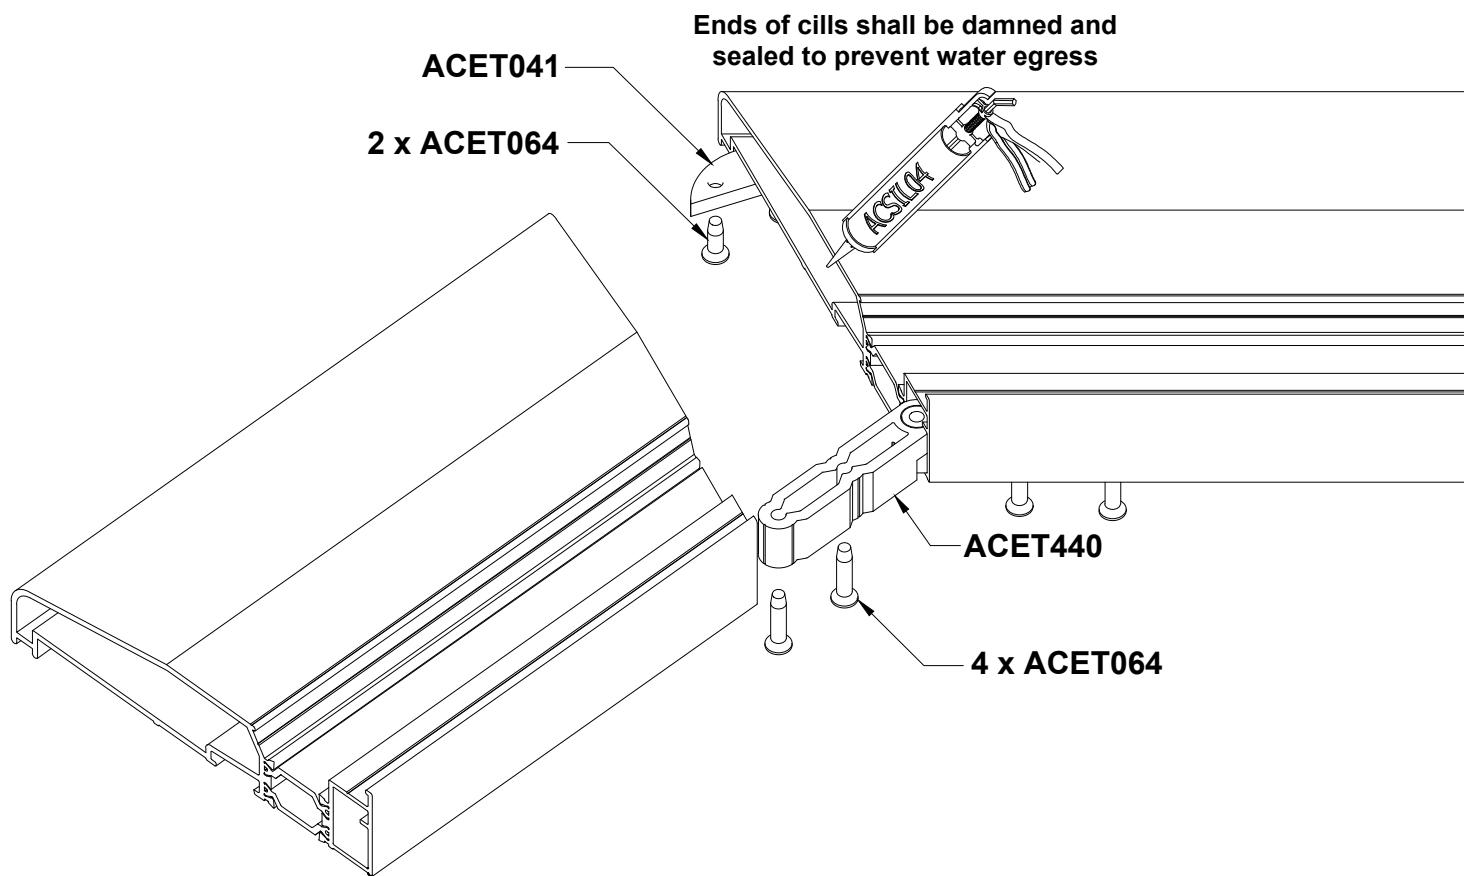Do Not Scale From This Drawing







Alitherm 400**Angled Sub Cill**

Do Not Scale From This Drawing

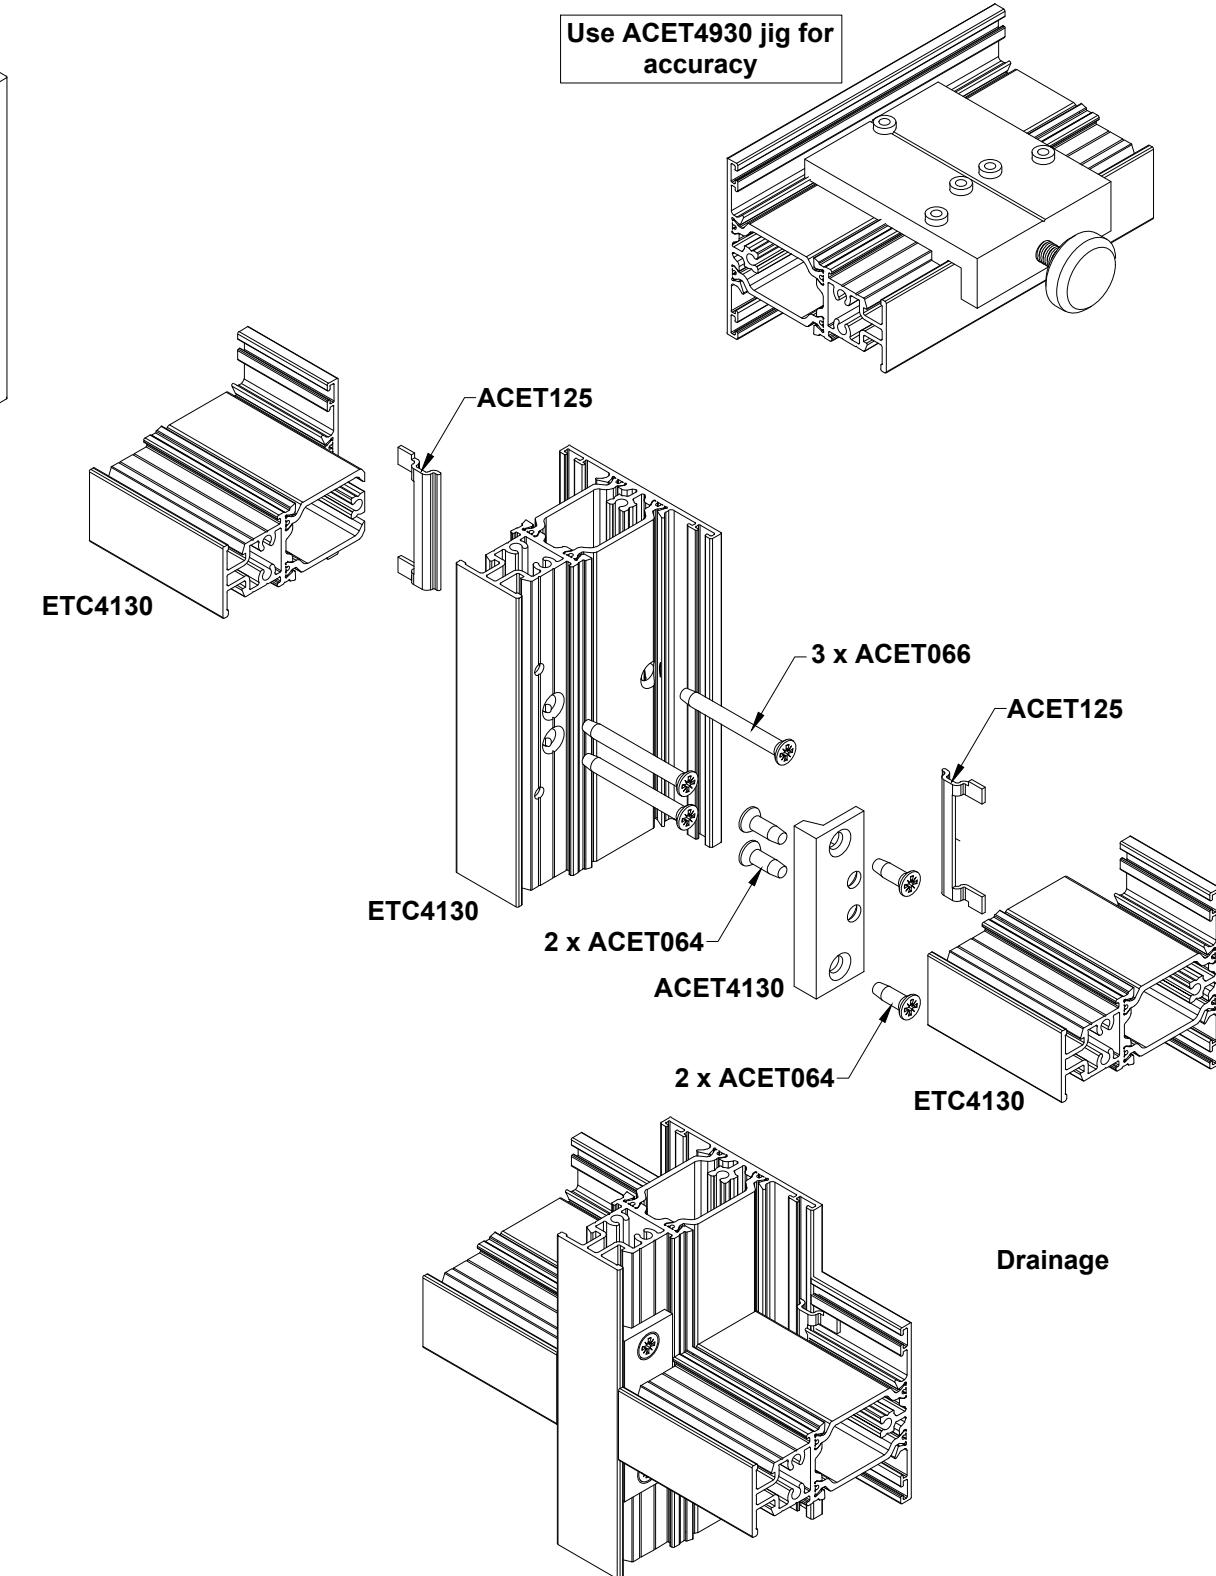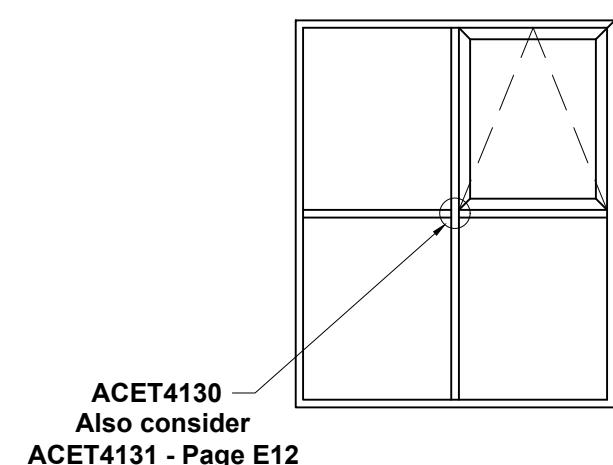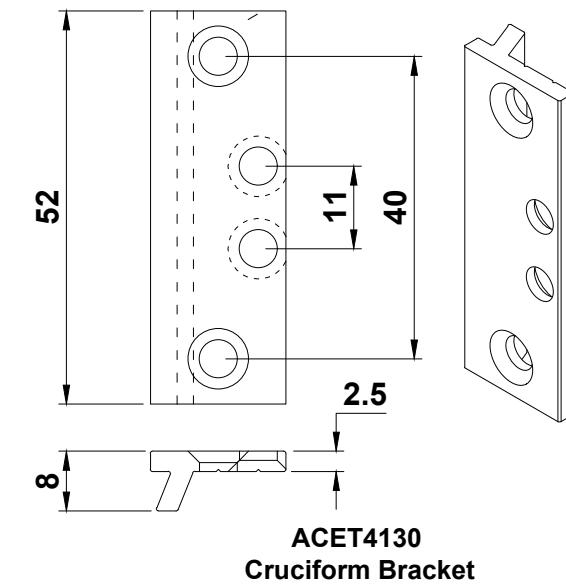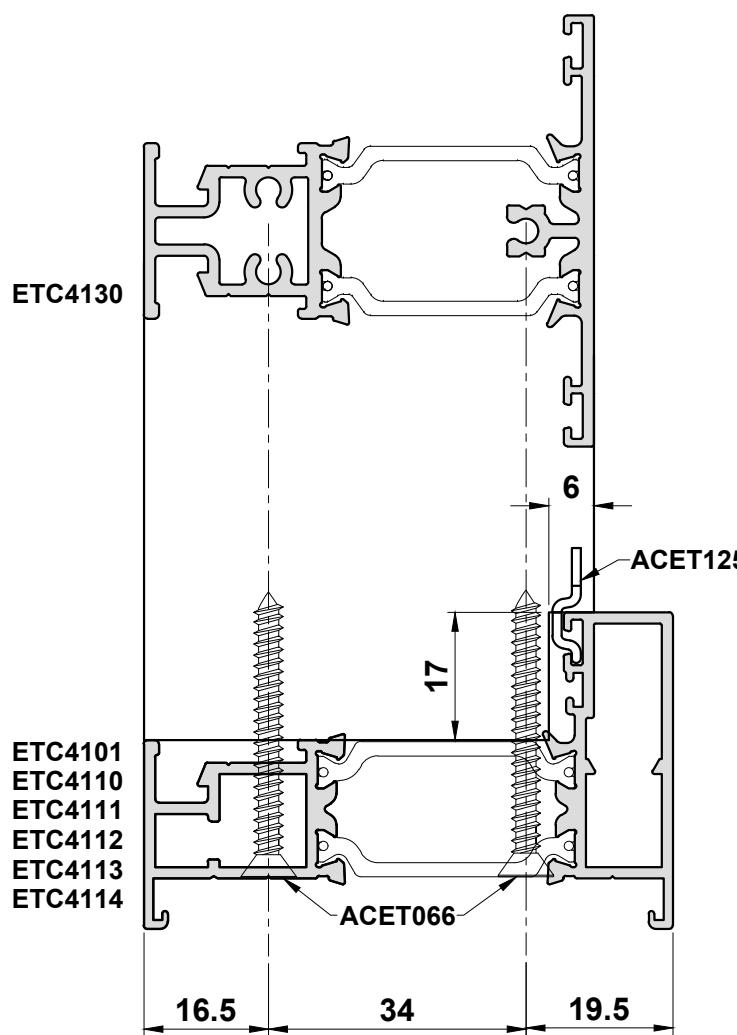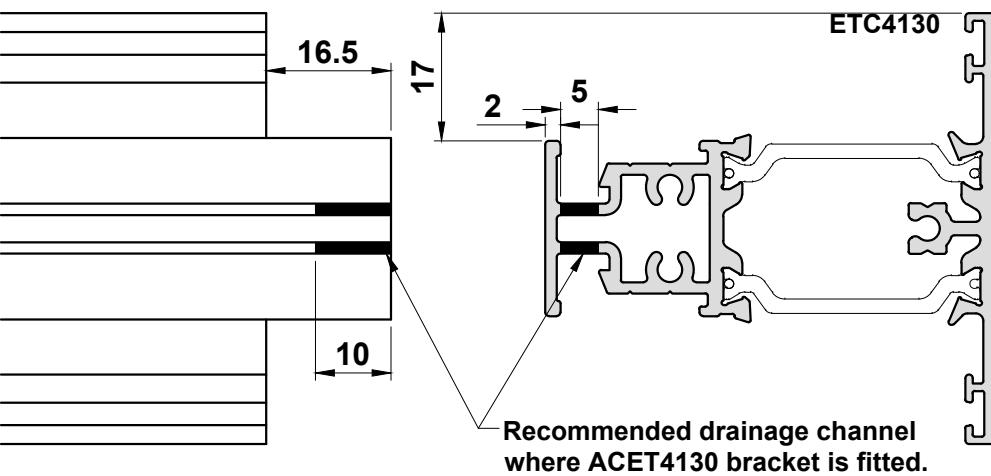ETC4130 Mullion/Transom Detail




Do Not Scale From This Drawing

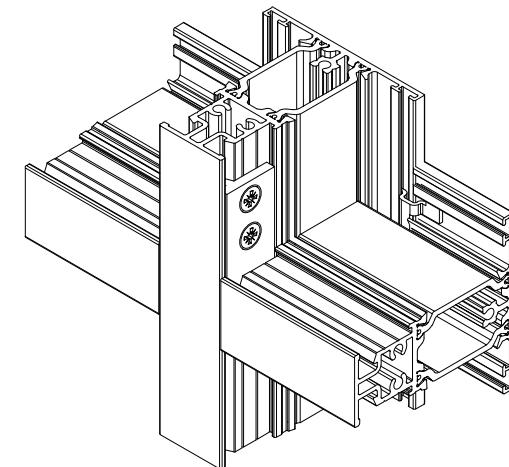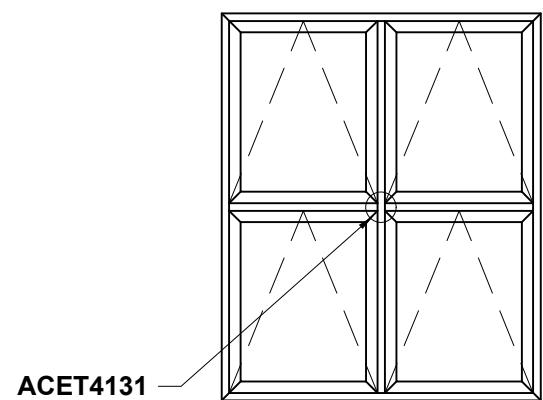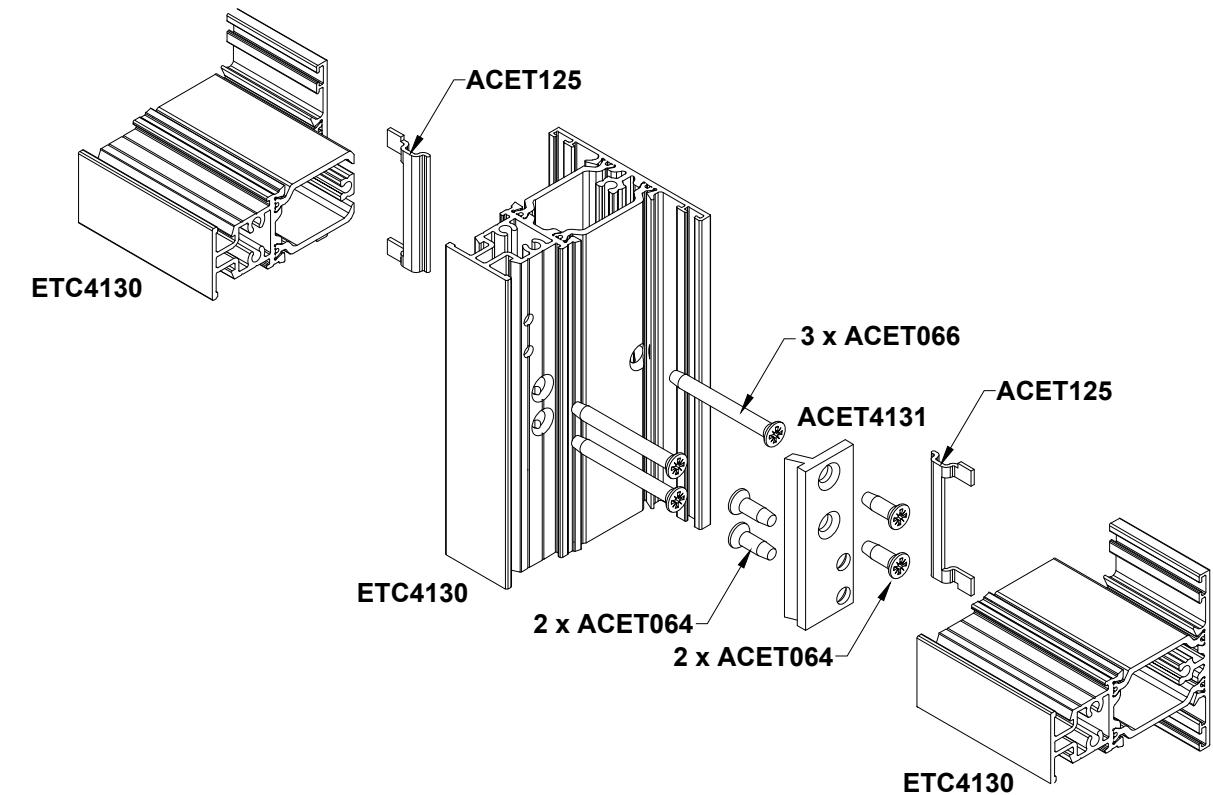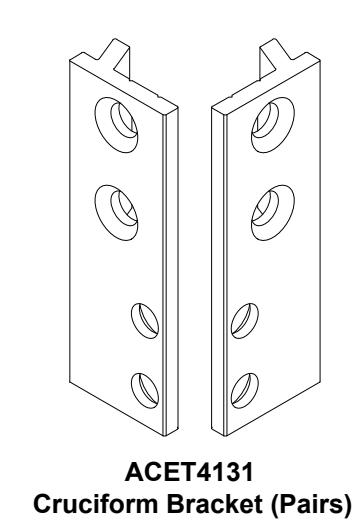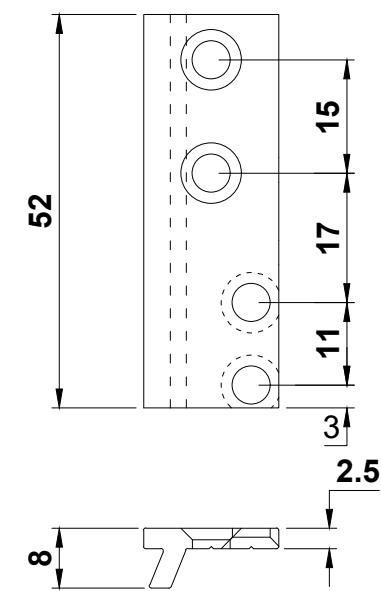
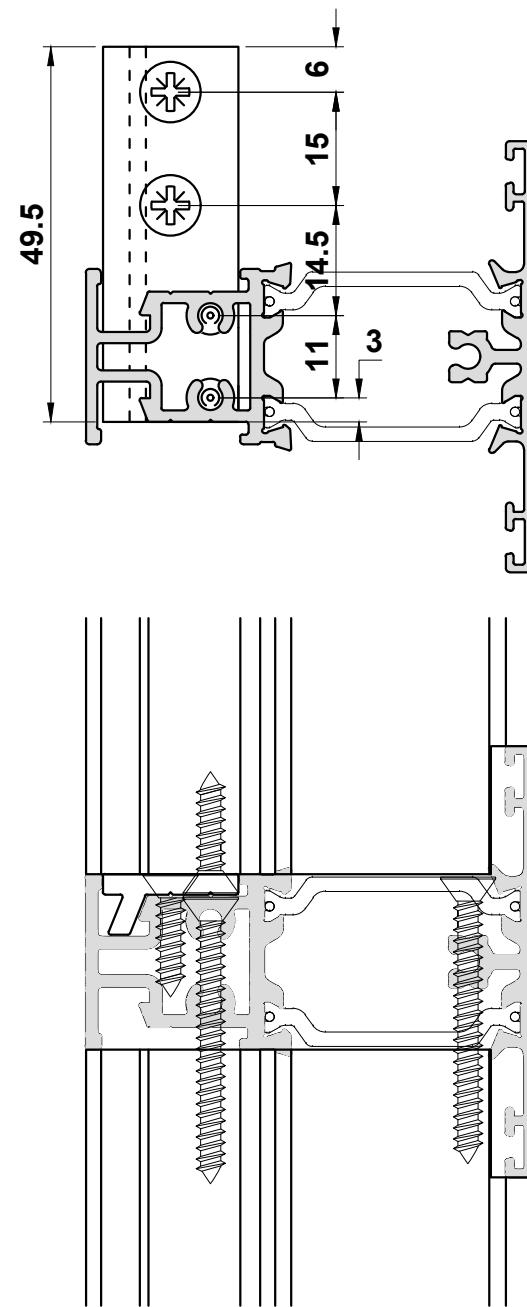
Alitherm 400**ETC4130 Mullion/Transom Detail**

Do Not Scale From This Drawing




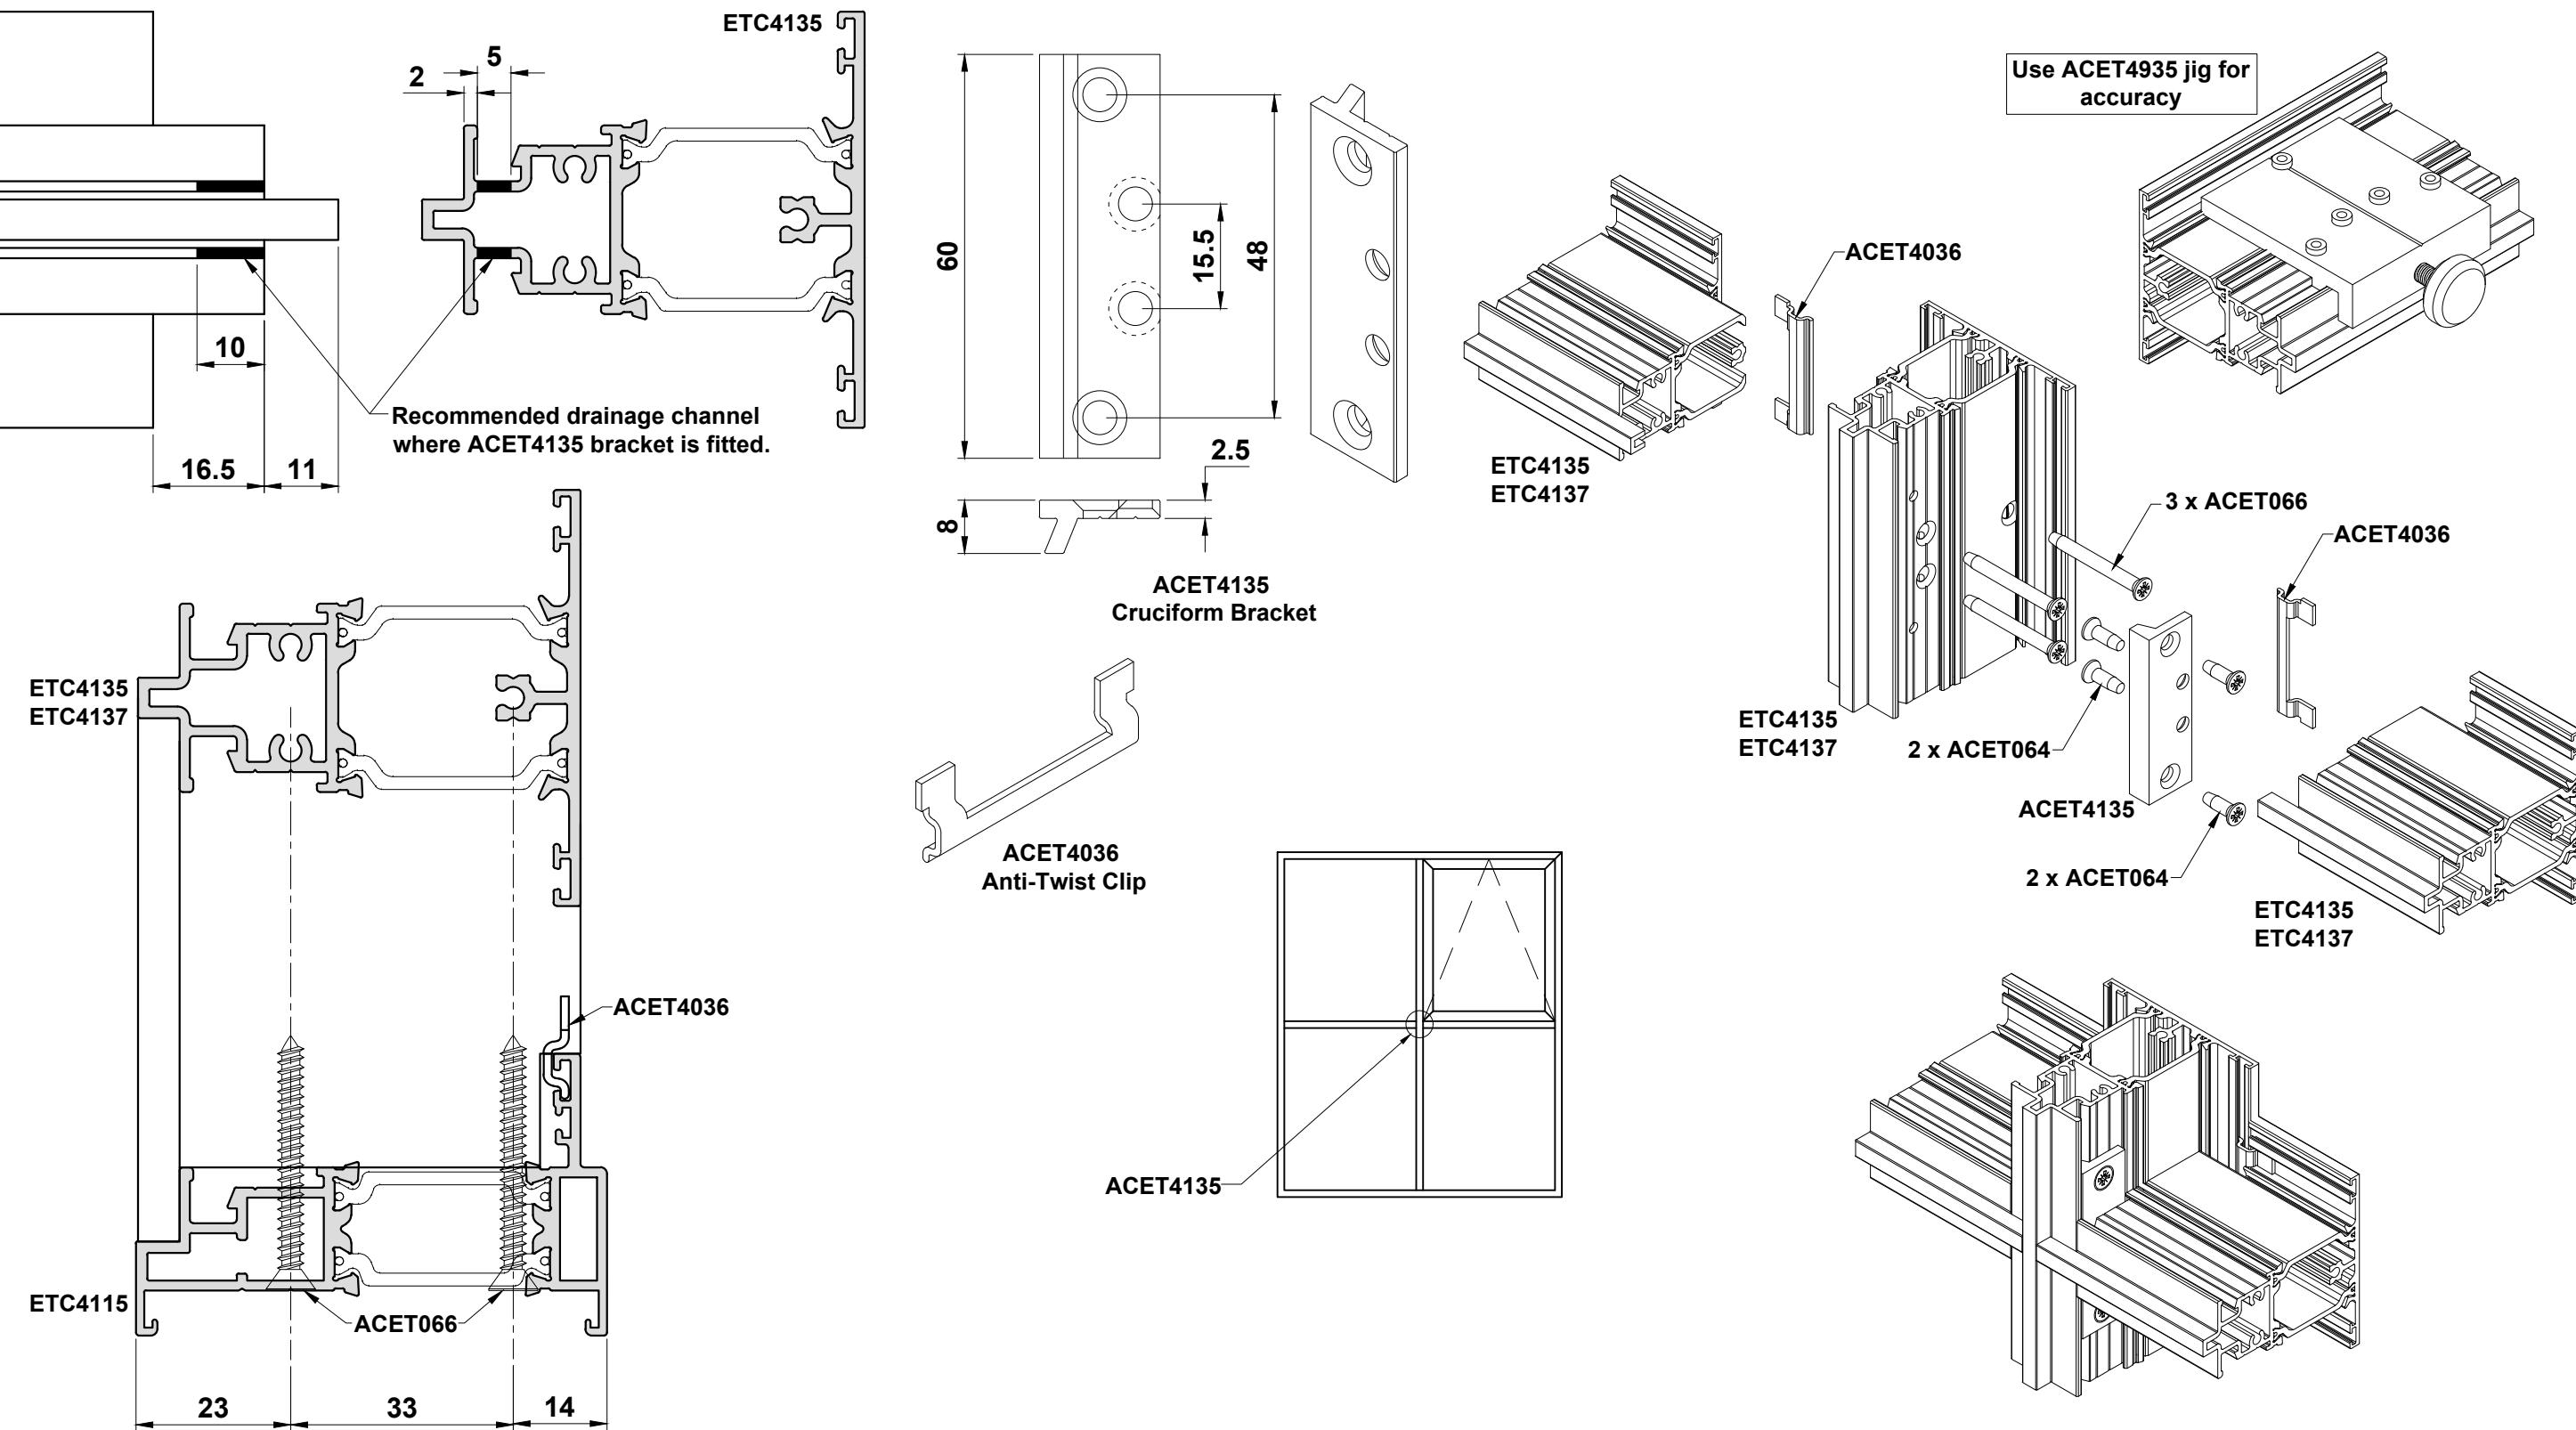
ETC4135 Mullion/Transom Detail



Do Not Scale From This Drawing

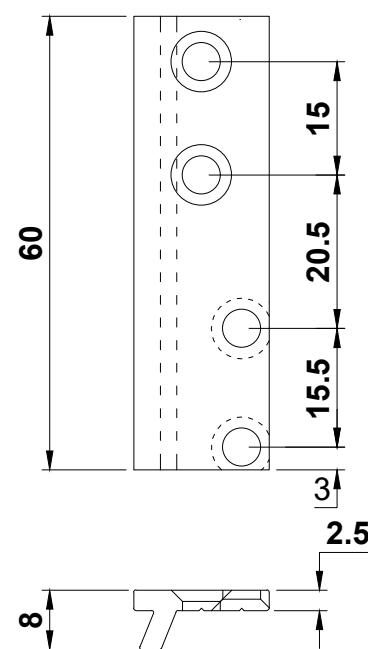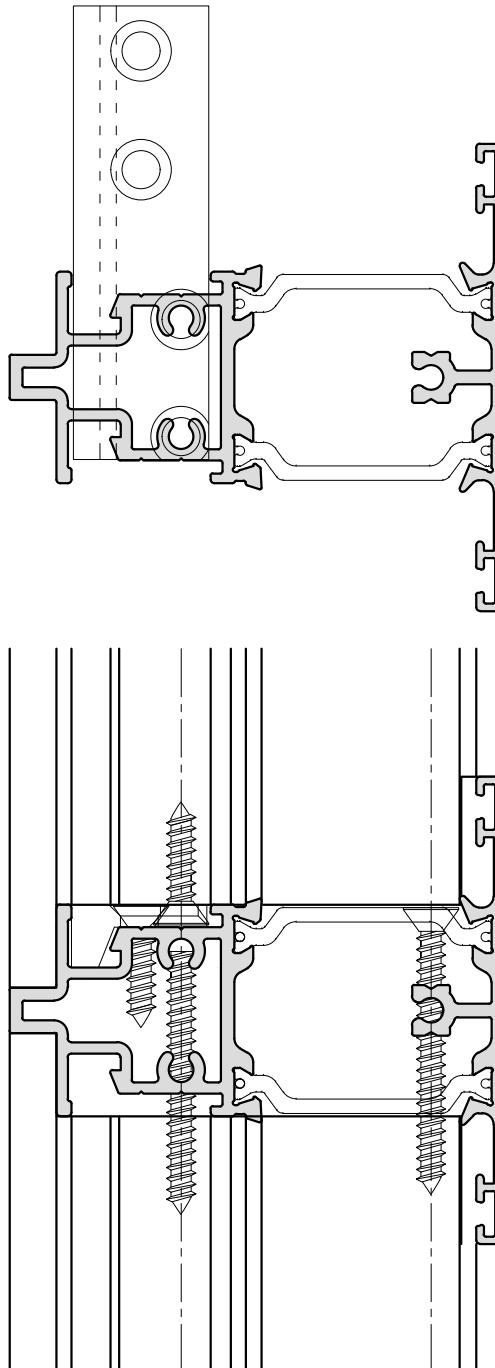
Alitherm 400**ETC4135 Mullion/Transom Detail**

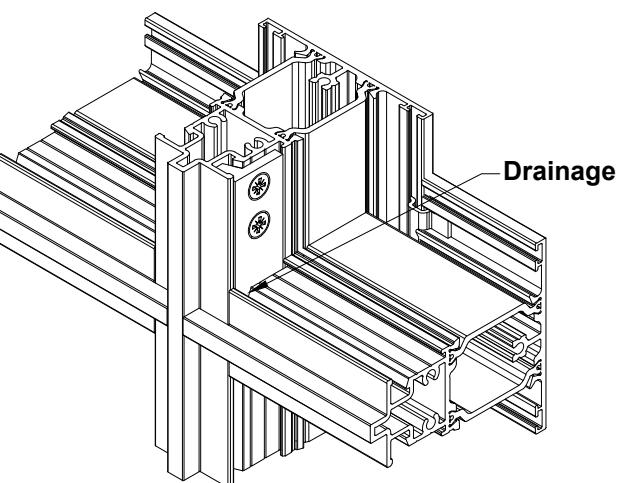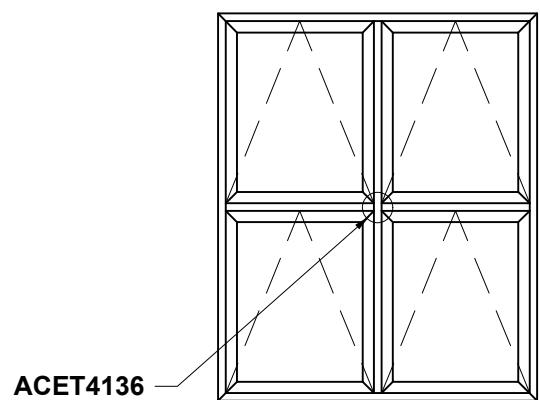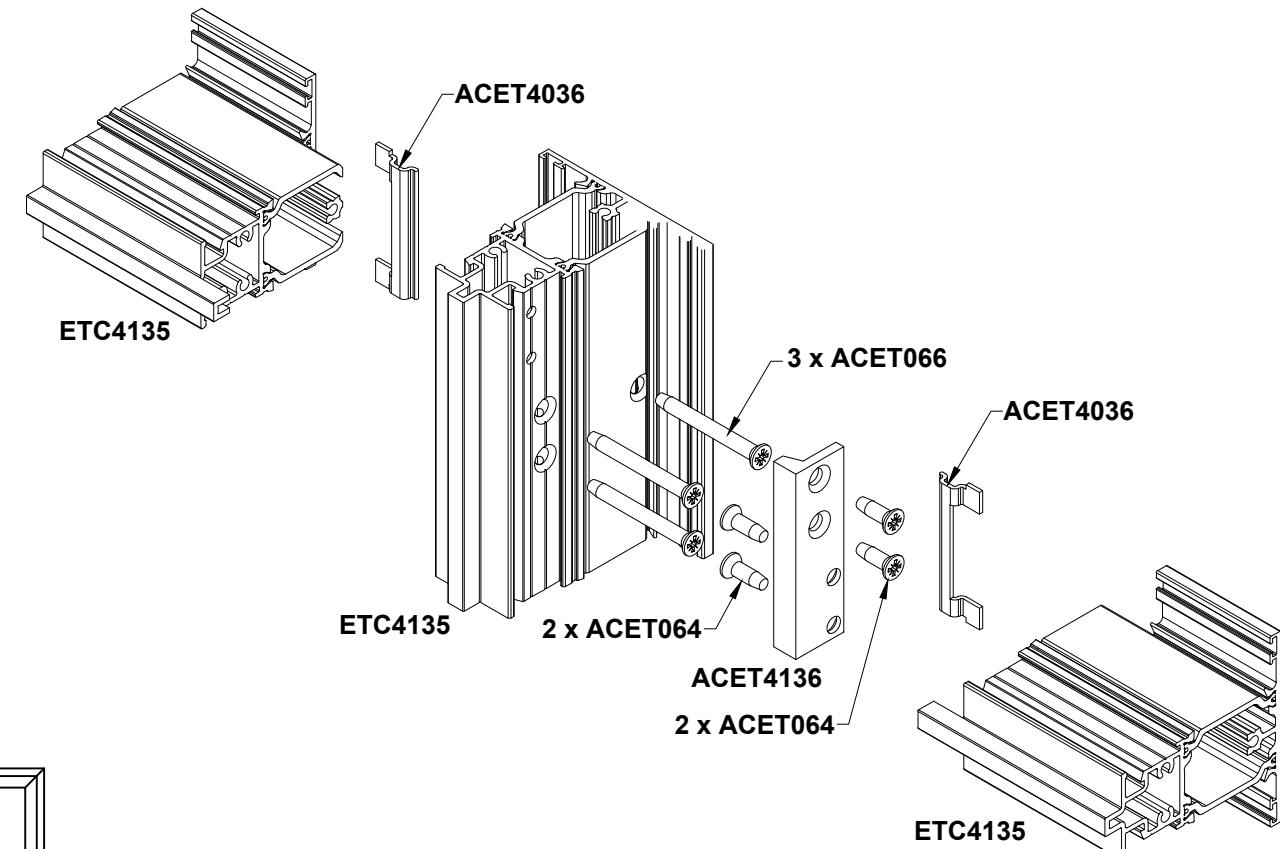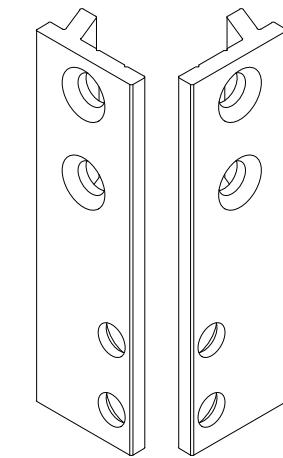ACET4136
Cruciform Bracket (Pairs)




Do Not Scale From This Drawing

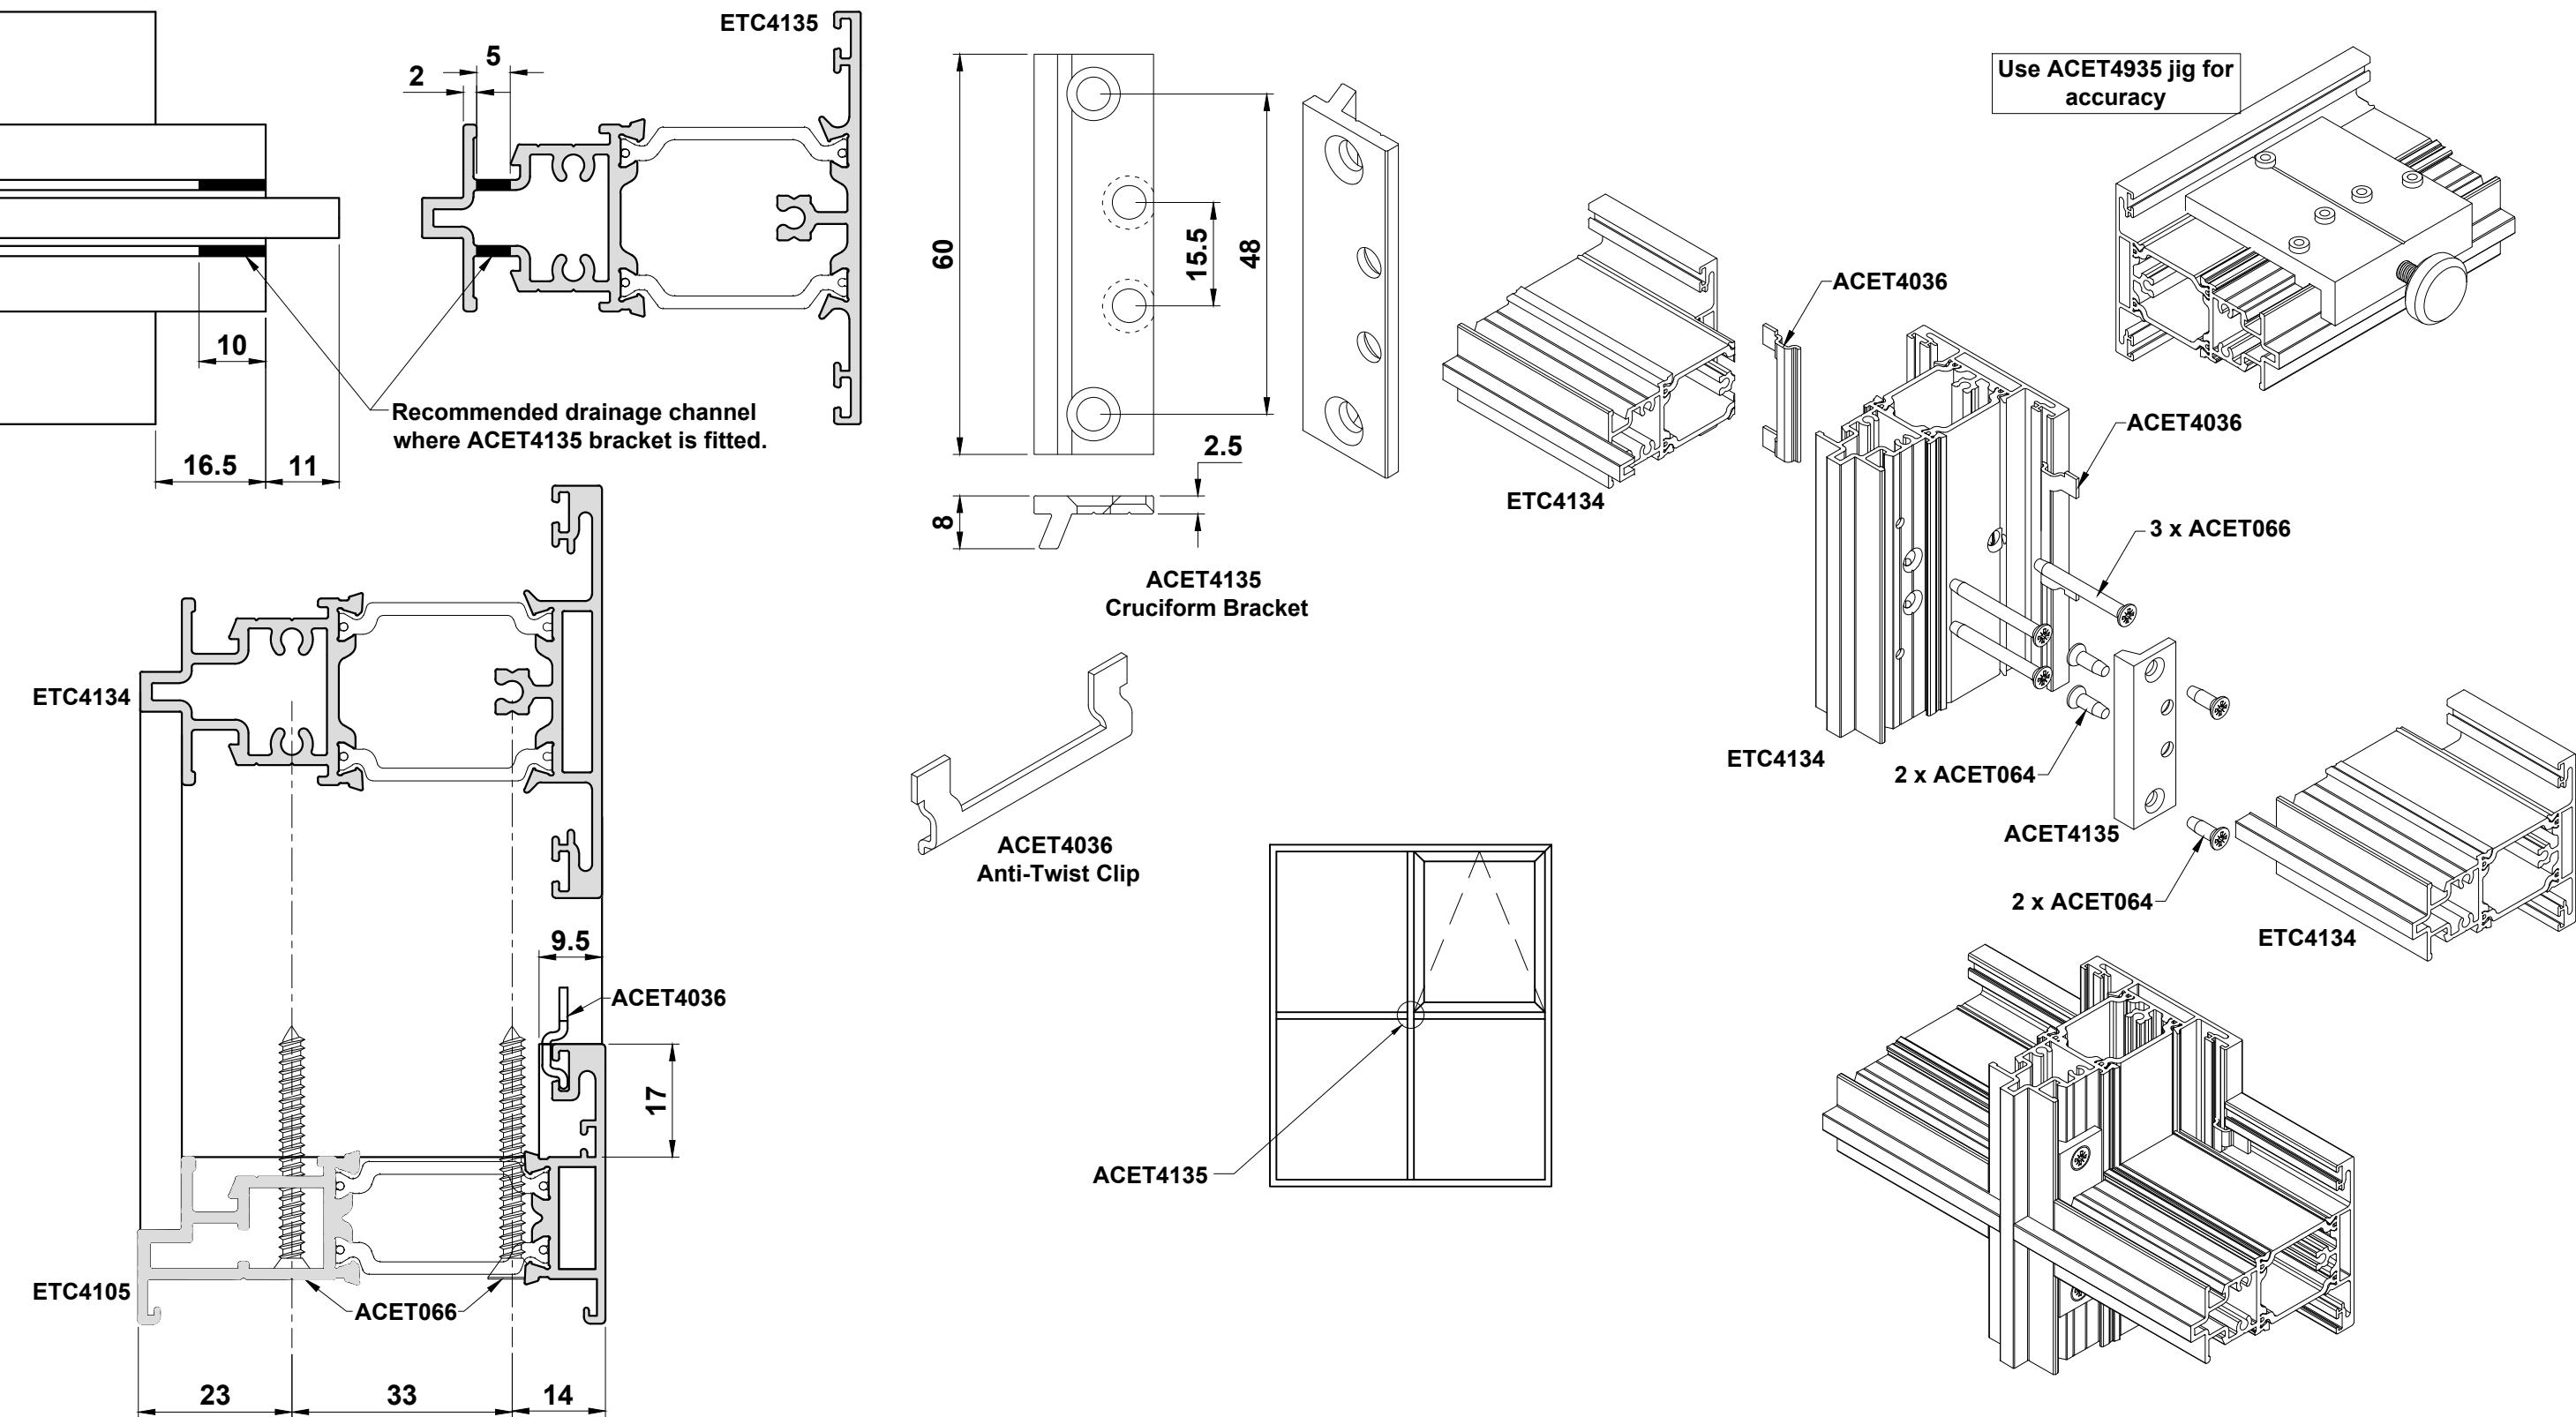ETC4134 Mullion/Transom Detail





Do Not Scale From This Drawing

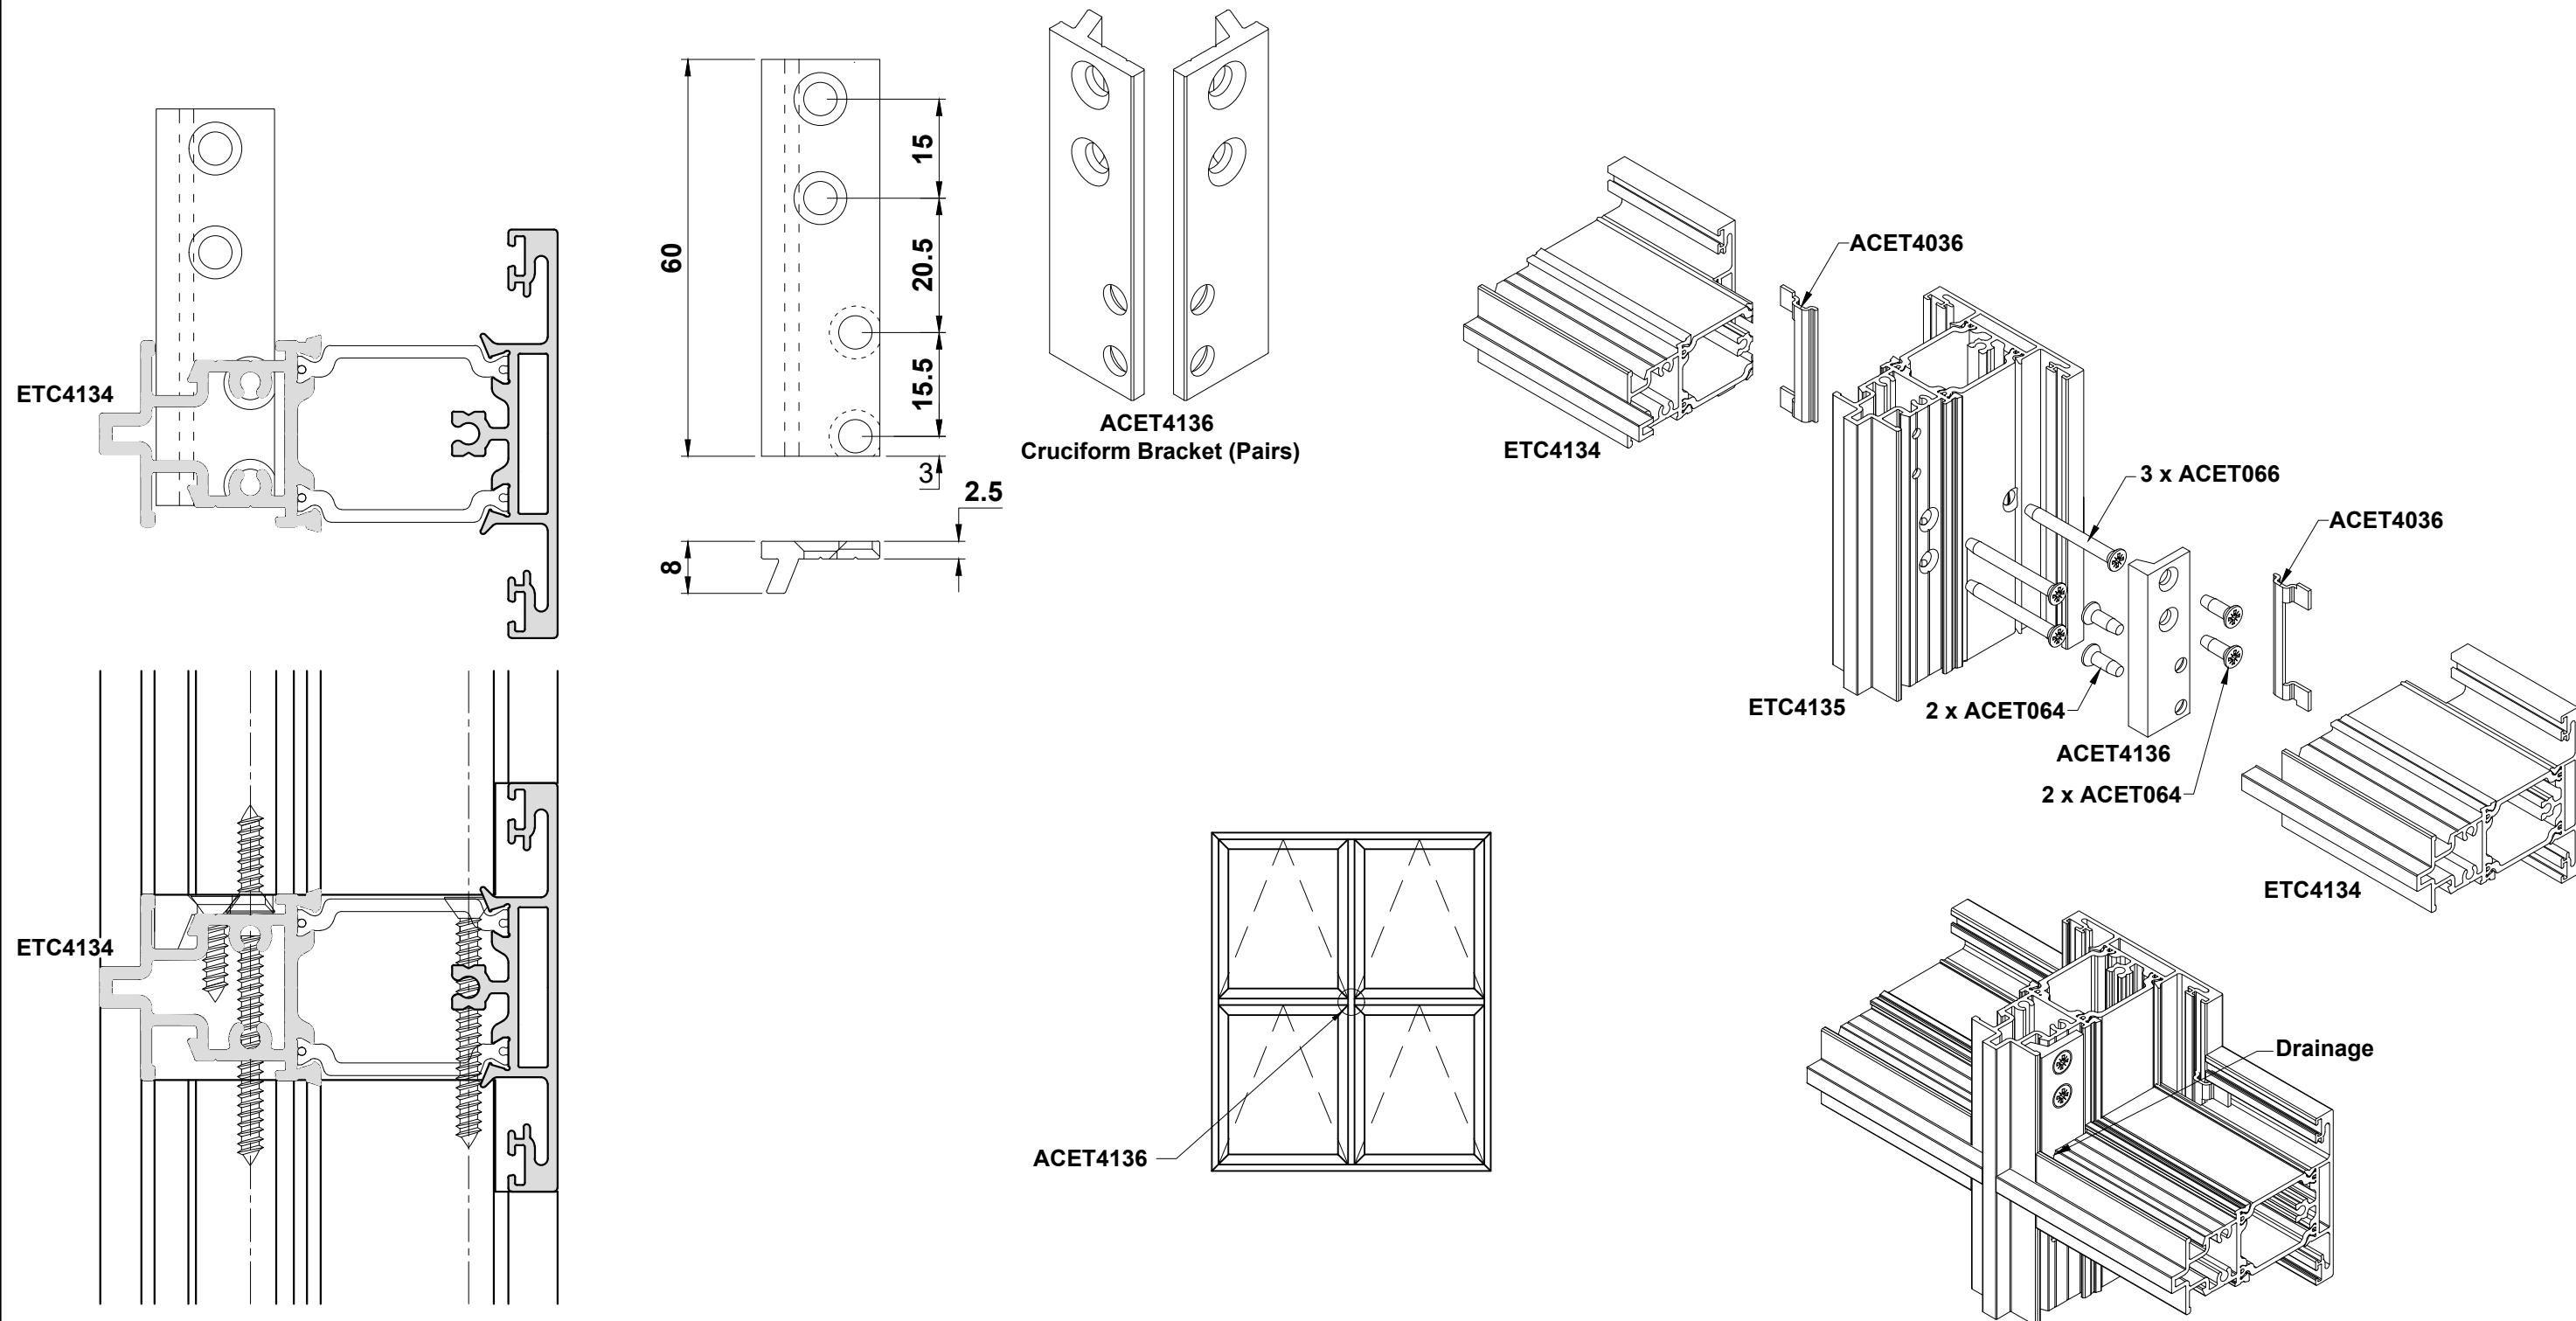ETC4134 Mullion/Transom Detail




Do Not Scale From This Drawing

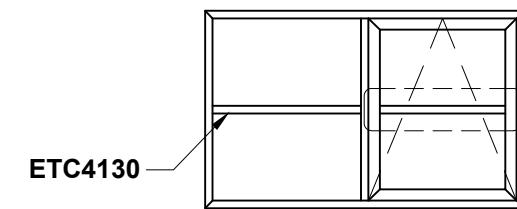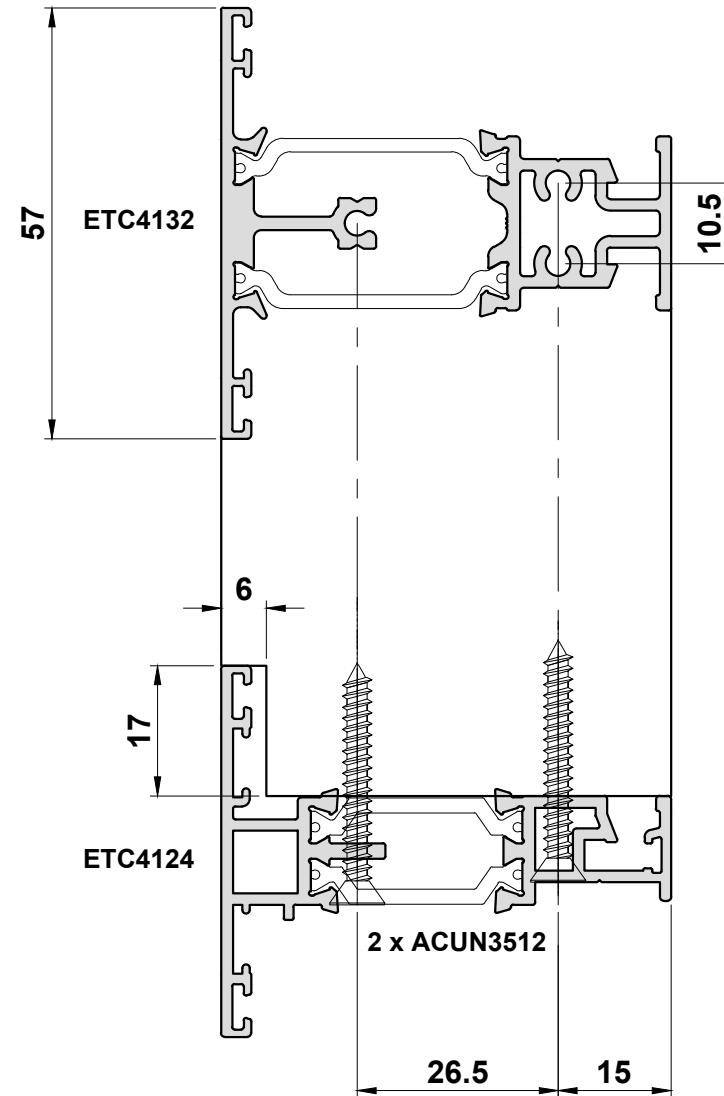ETC4132 & ETC4133 Dummy Transoms




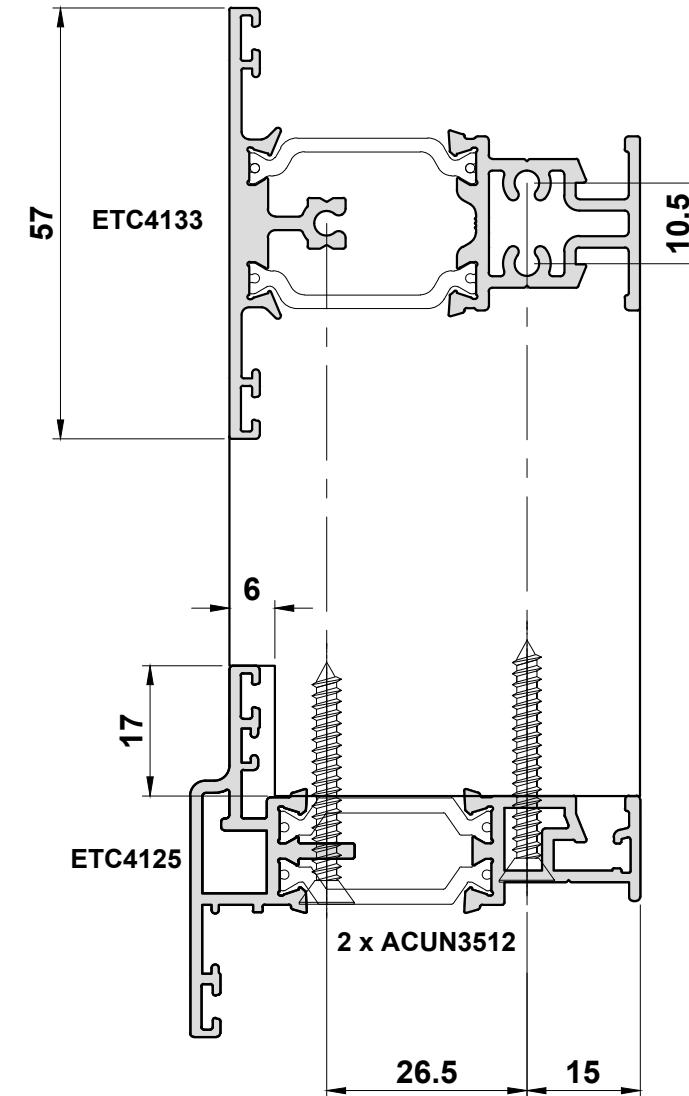Note:
End mill cutters can be ordered through Smart Systems Ltd.
Please contact the Technical Department for an order form.
Standard delivery is 2-3 weeks approx.



Alitherm 400

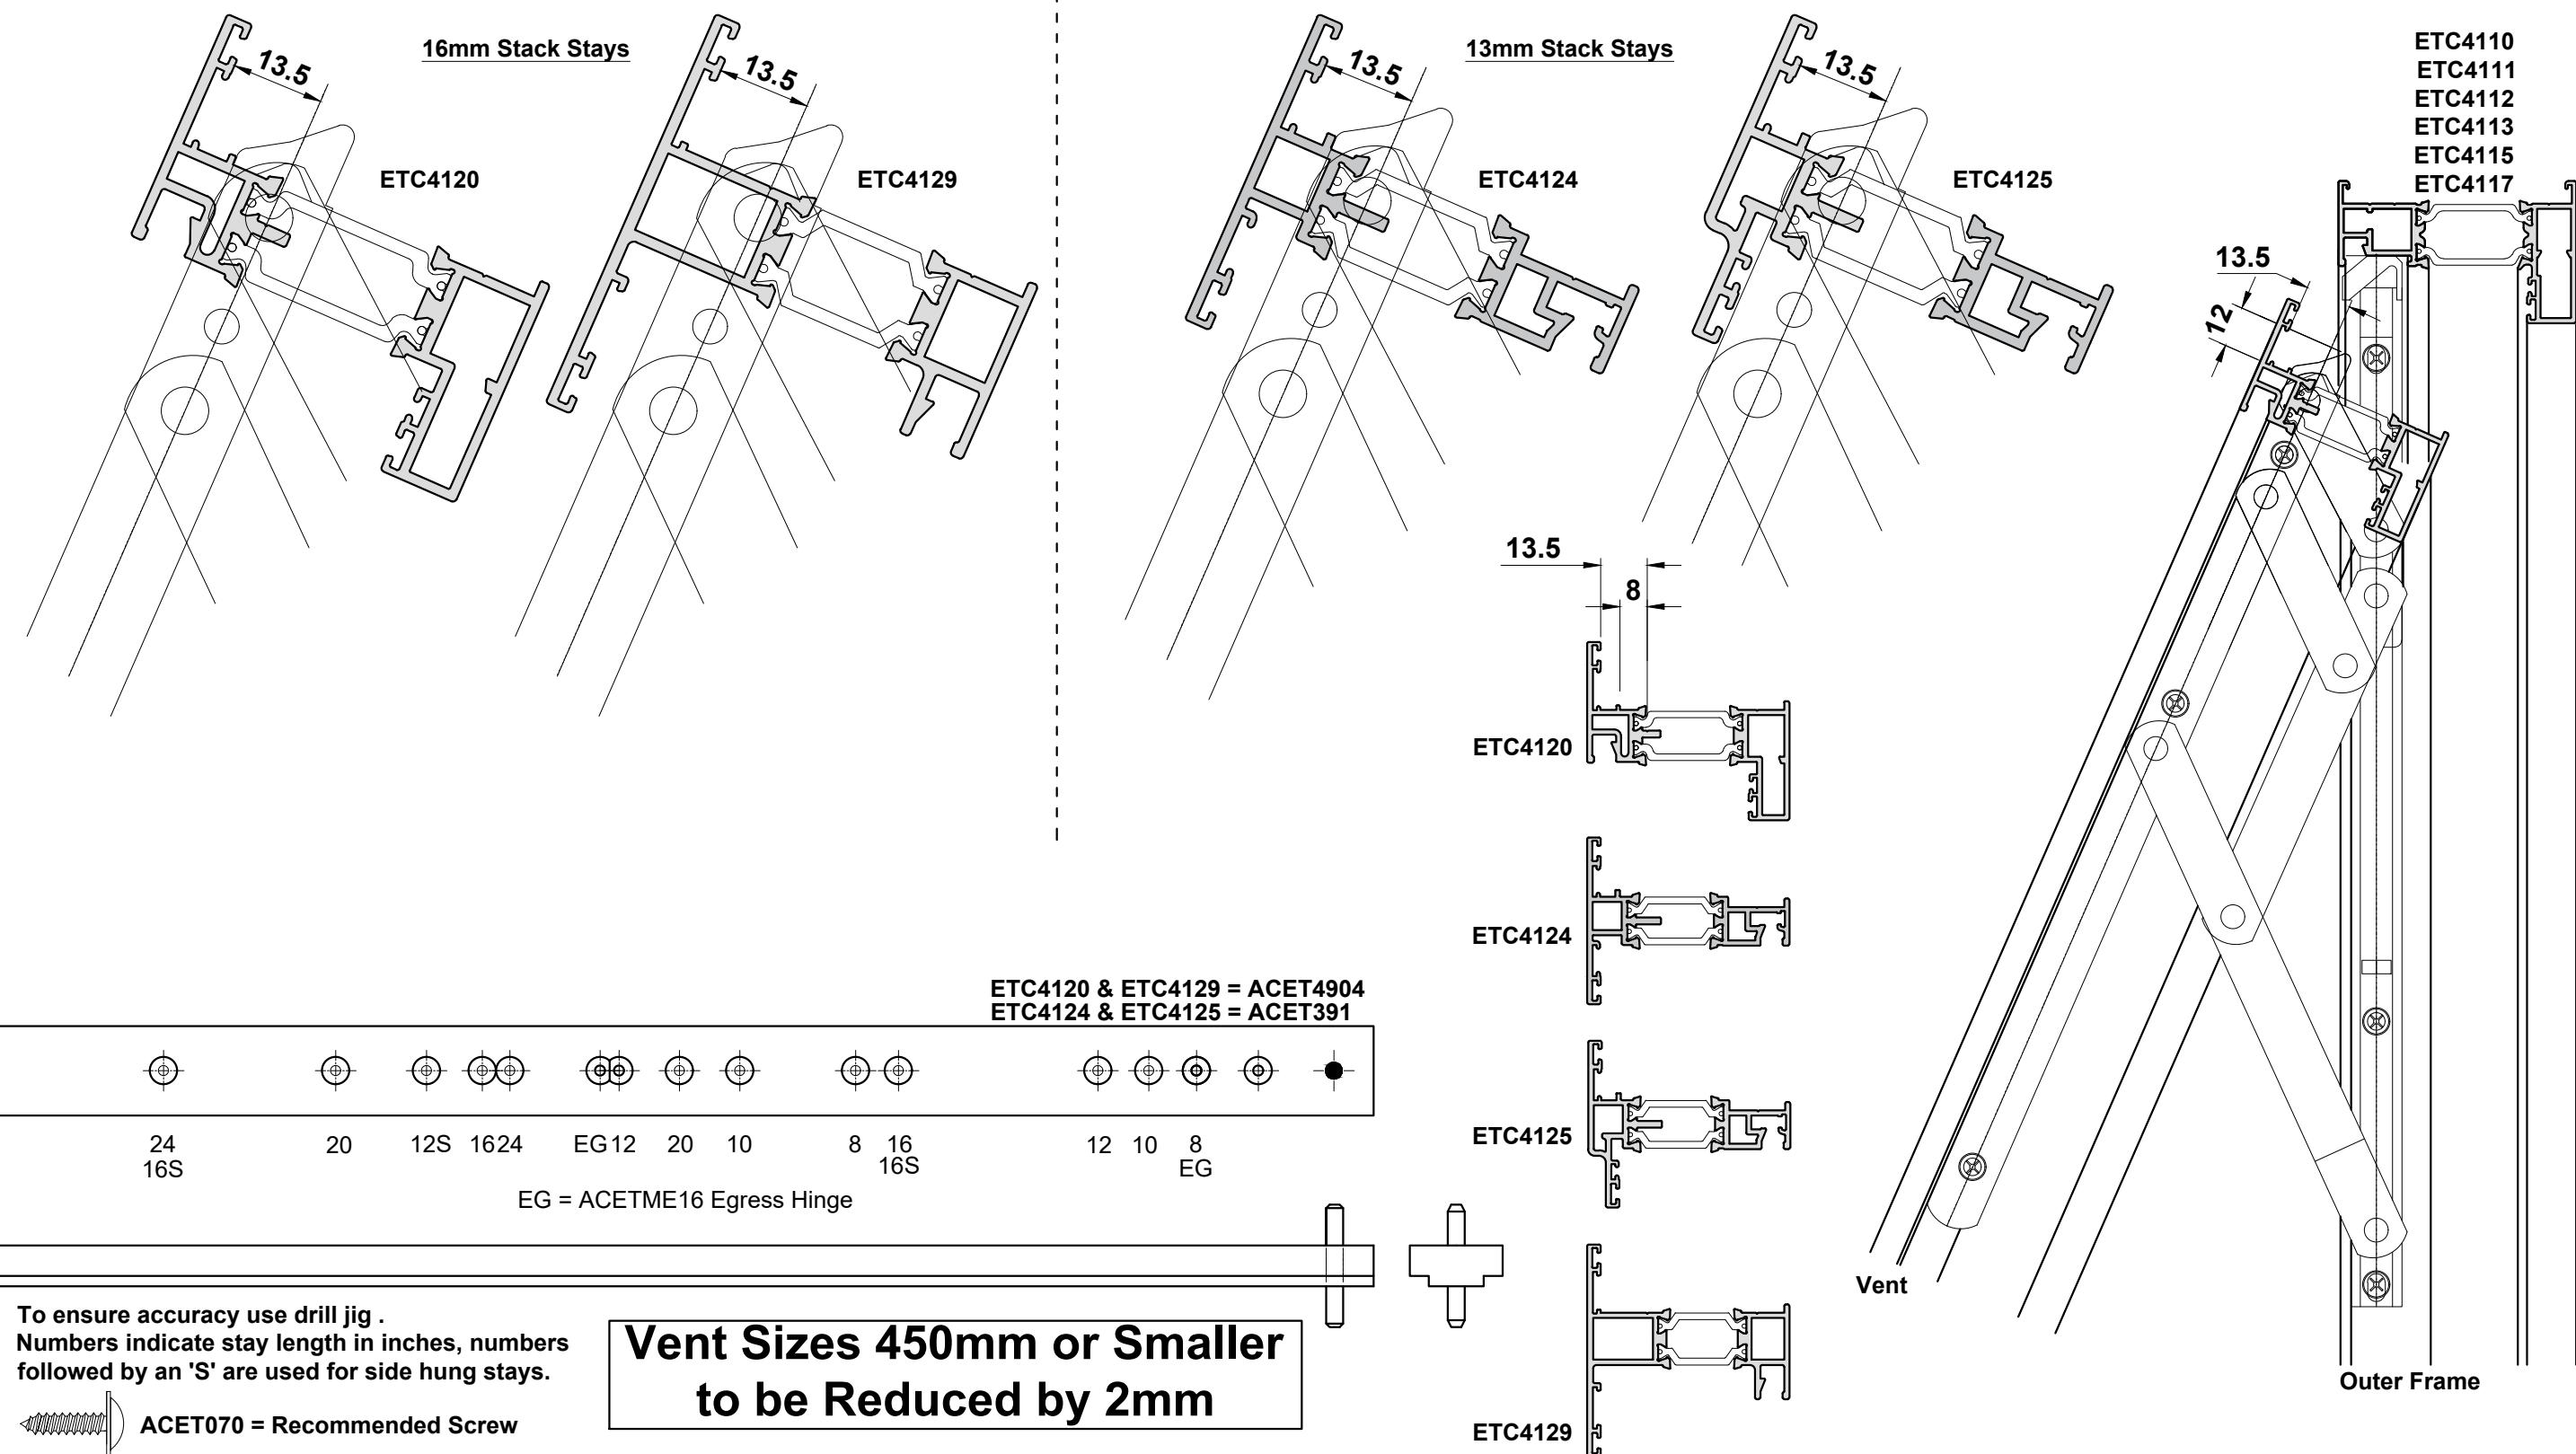
Friction Stay Details



Do Not Scale From This Drawing

Egress Hinge Details

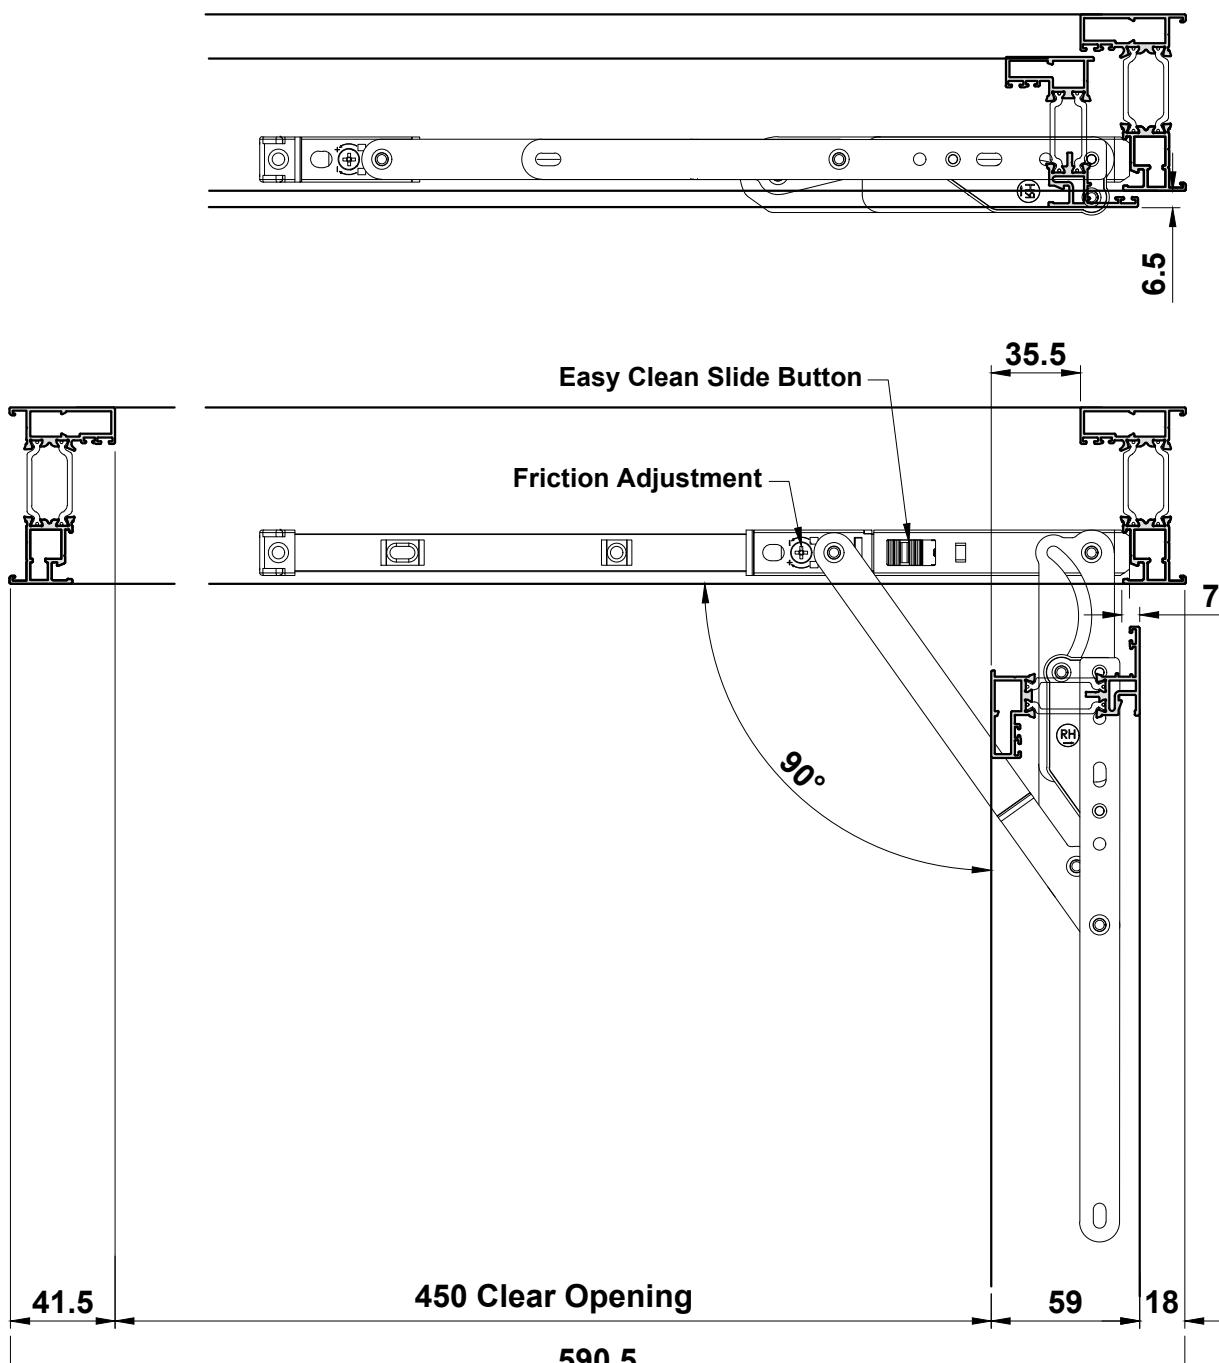Example Opening Detail




For further information regarding clear openings, please see
the Smart Systems' White Paper Document B

The benefits of these hinges are:

- True 90° opening angle
- Achieves minimum fire escape requirement on smaller windows
- Can be moved into easy clean position, with automatic reset on closing
- Superior carrying weight (40kg max)
- The 345mm length replaces the current 305mm & 406mm hinges
- Tested to BS EN1670 and exceeded Grade 5 for ultimate corrosion resistance
- Tested to EN1191 over 25,000 cycles under 40kg.

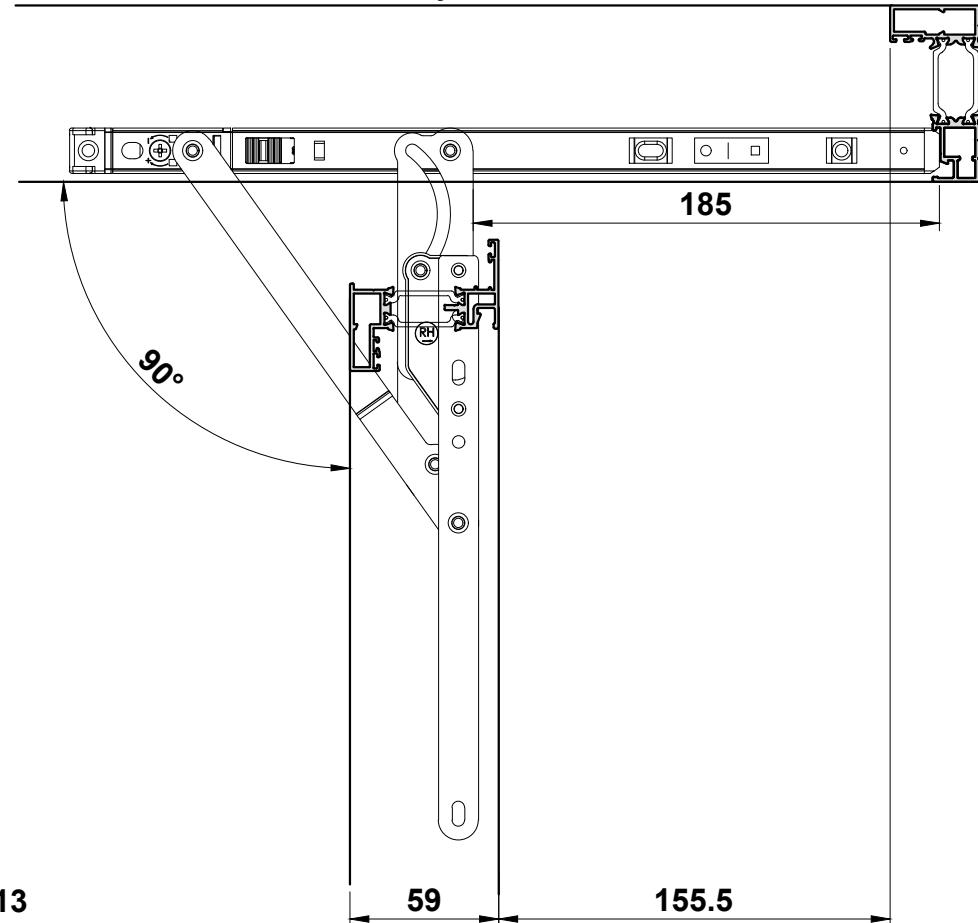Easy Clean Position




**ACETME16 & ACETME13
Egress Hinges**

Side Hung	Sashes	Jig	Max. Vent	Width		Typical
			Weight (kgs)	Minimum	Maximum	
ACETME13	ETC4124 & ETC4125	ACETME93	40	365	865	-
ACETME16	ETC4120 & ETC4129	ACETME96				





Alitherm 400

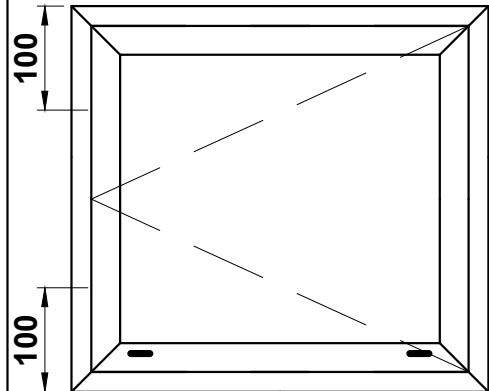Security Hinge Protectors & Pull-In Blocks





Please Note:

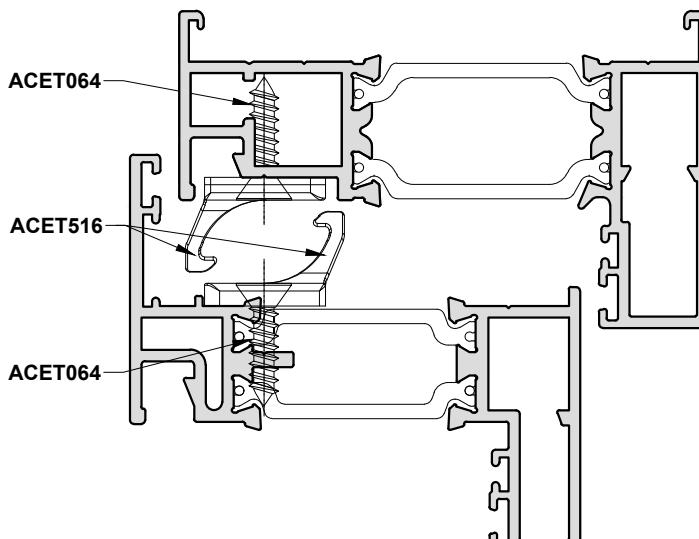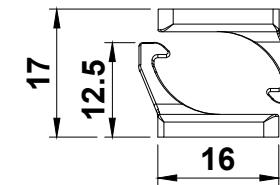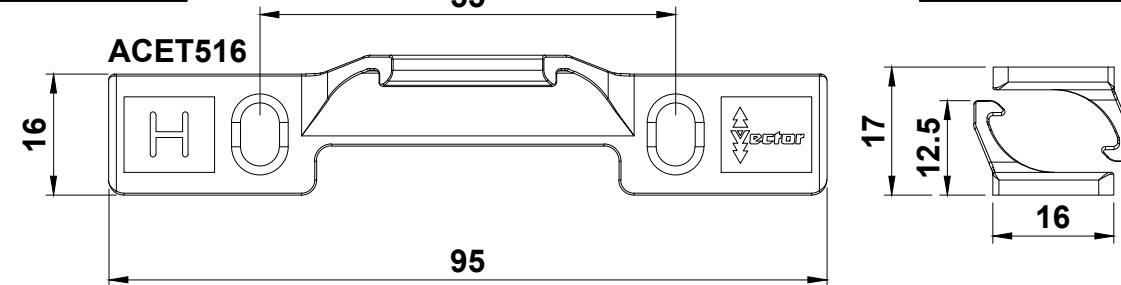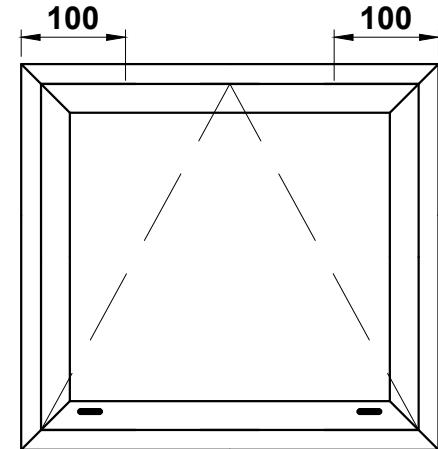
- 2 pairs per opening vent to be fitted to hinged side of window
- Each pair must be fitted with the hook centre within 100mm of each hinge



Pull In Block		
Sash	Pull In Block	'X'
ETC4120	ACET652	17
ETC4124	ACET352	14.5
ETC4129	ACET652	17

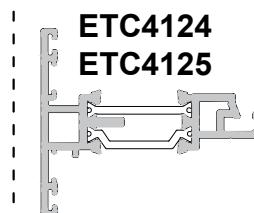
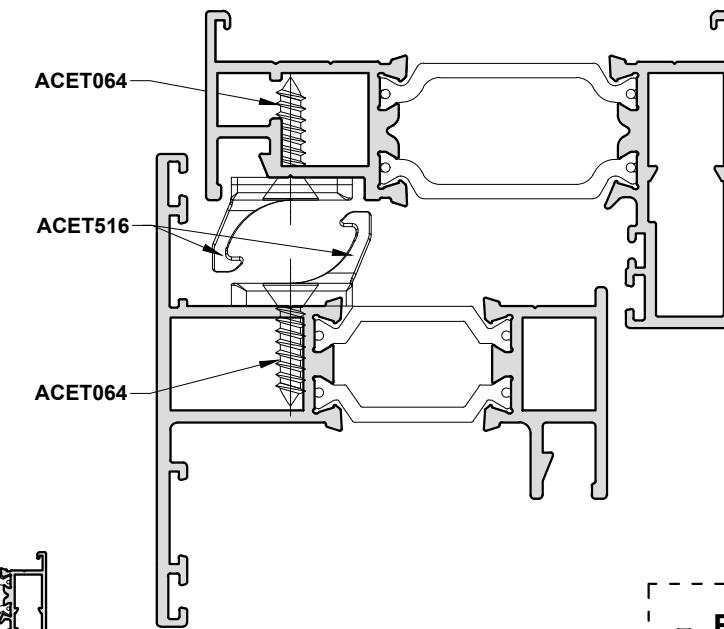


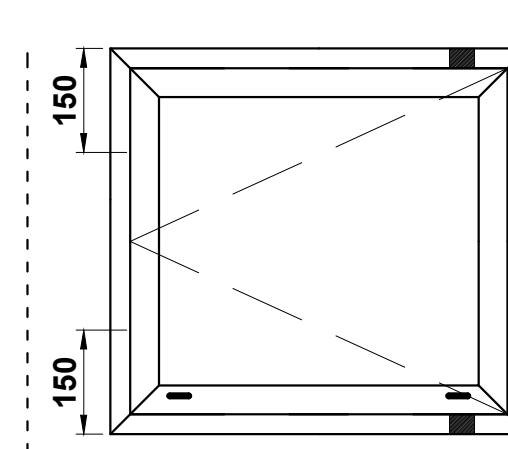Important Fabrication Note:
ETC4124 & ETC4125 require
ACET513 Hinge Protectors &
ACET352 Pull-In Blocks.




Please Note:

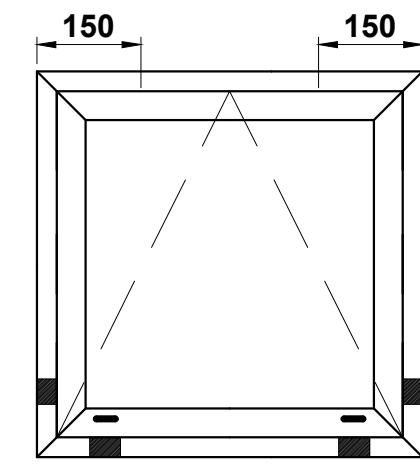- 2 pairs per opening vent to be fitted to hinged side of window
- Each pair must be fitted with the wedge centre within 150mm of each hinge and in the centre of the window when sash height or width is greater than 800mm.
- When used with ACET516 and security takes priority, install ACET652 centre within 200mm of hinge.




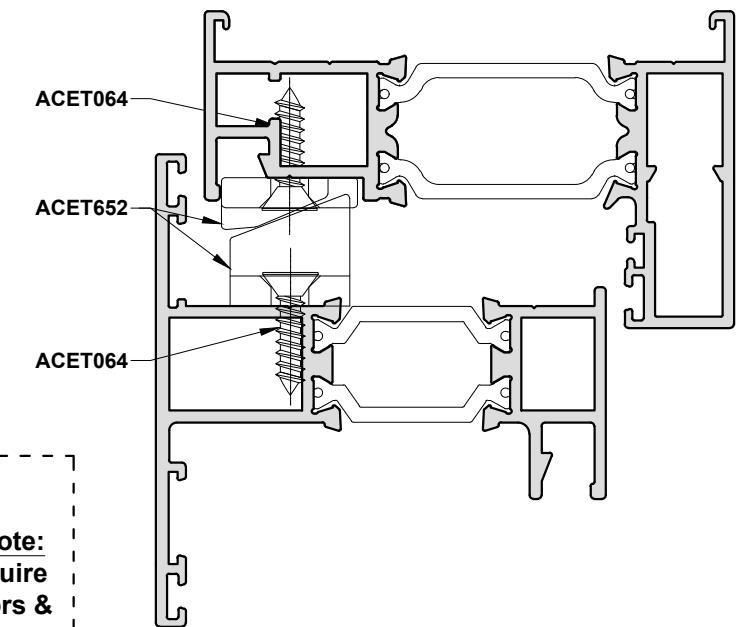Please note that for fitting each sash, we recommend using 4 x ACET4180, as shown in the images above.




Do Not Scale From This Drawing





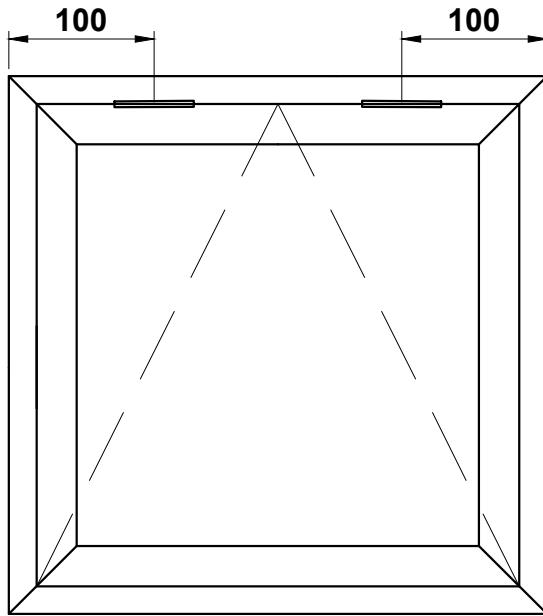
ACET4050 Hinge Details



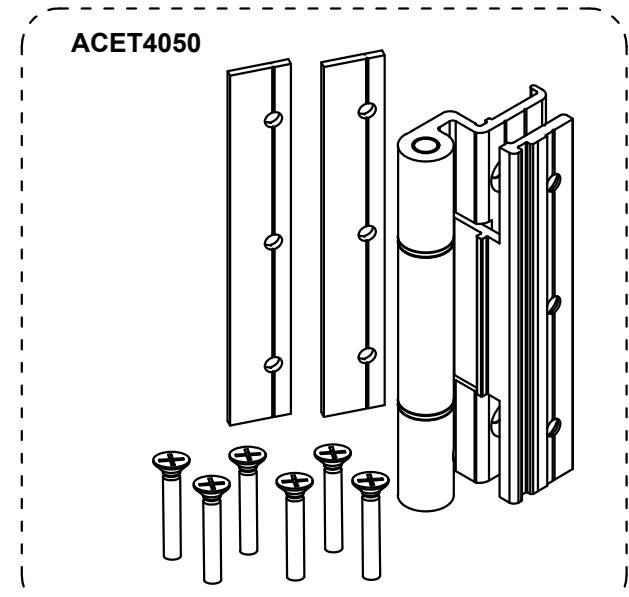Please note: ACET4050 Butt Hinge is not covered by the Kitemark.




Top Hung Max. 50kg
Side Hung Max. 40kg

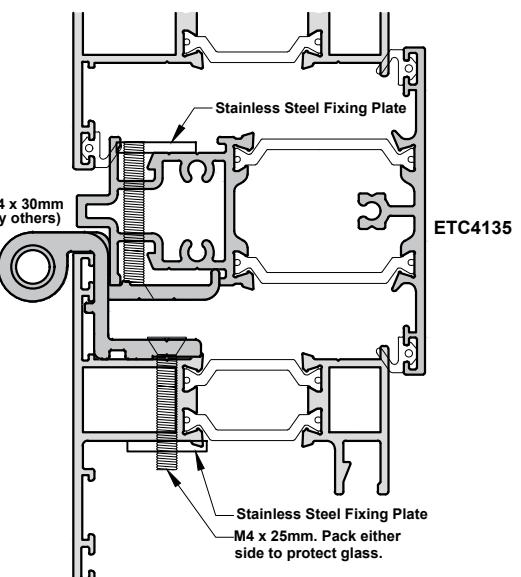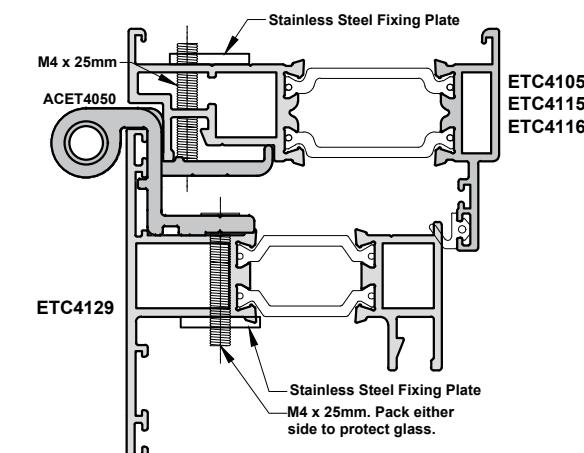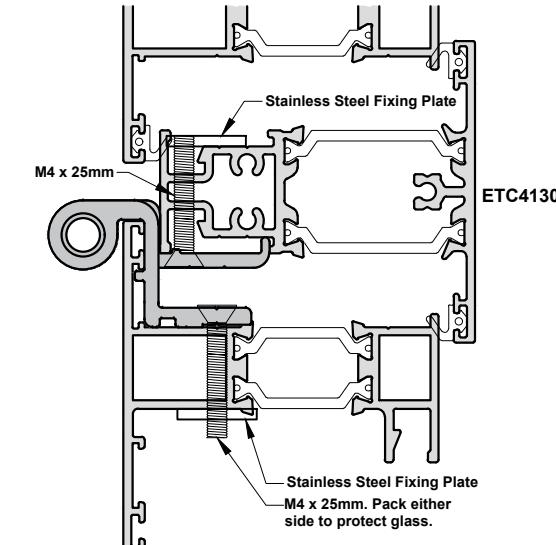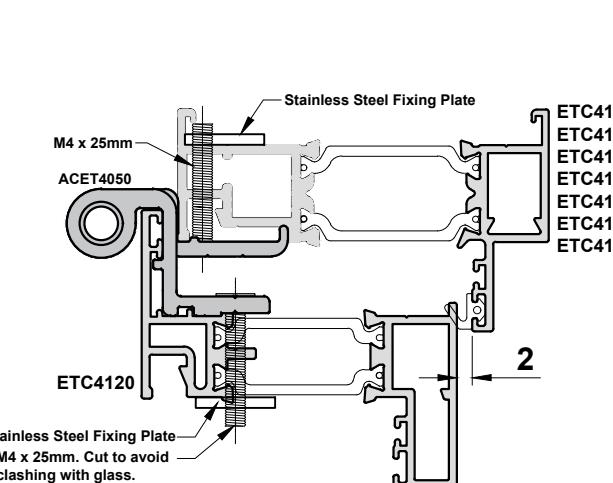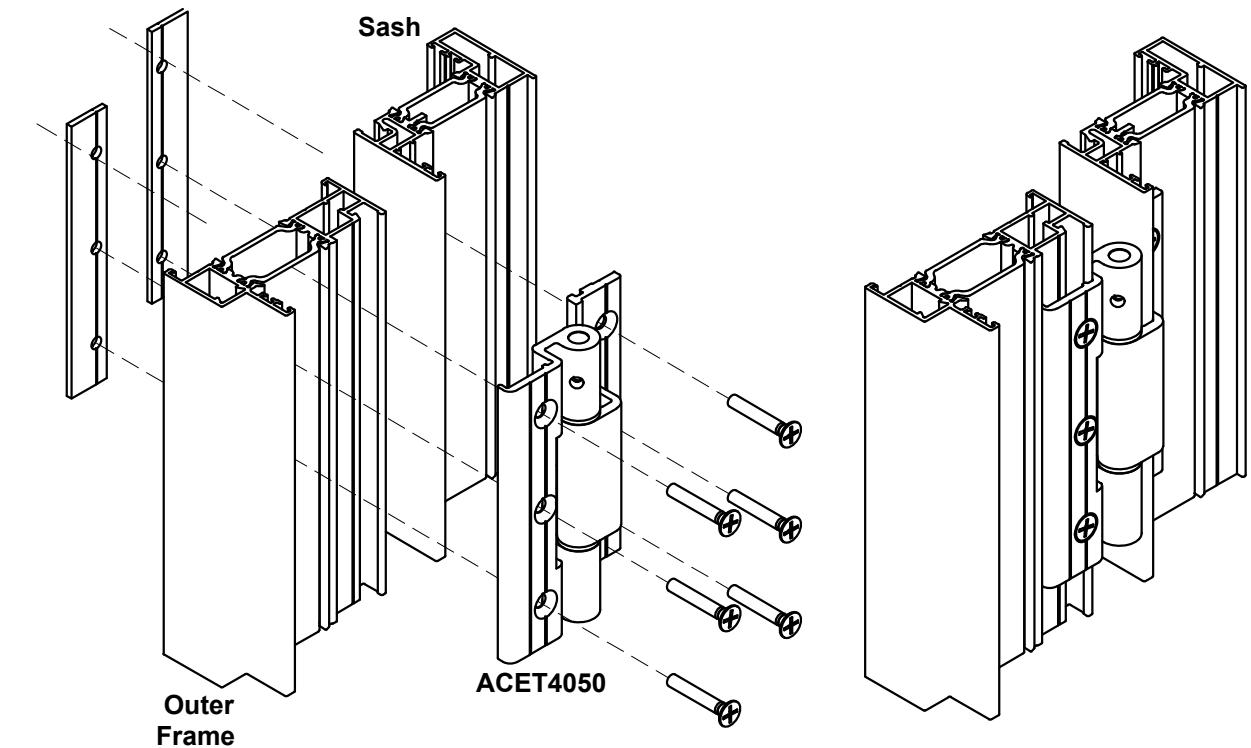


Important note:
ACET4050 Butt Hinge is not compatible with ETC4124 & ETC4125

Alitherm 400



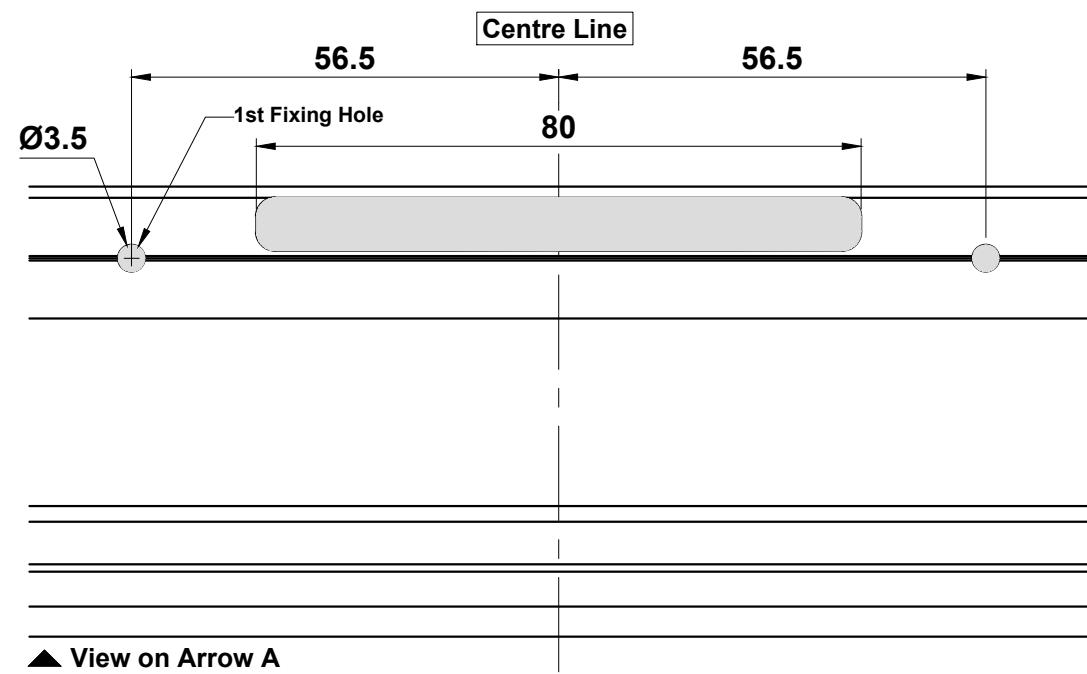
Espag Locking Prep Detail



▲ View on Arrow A

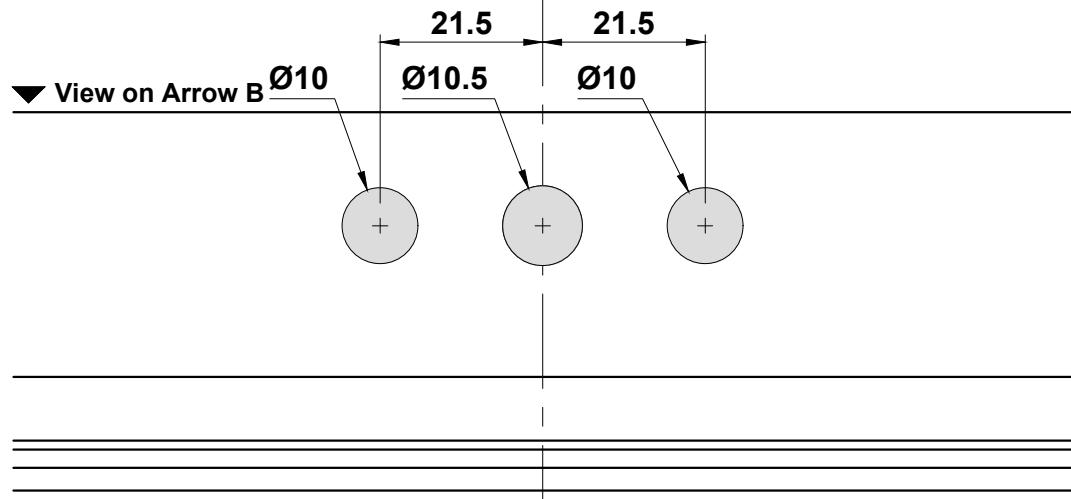






▼ View on Arrow B

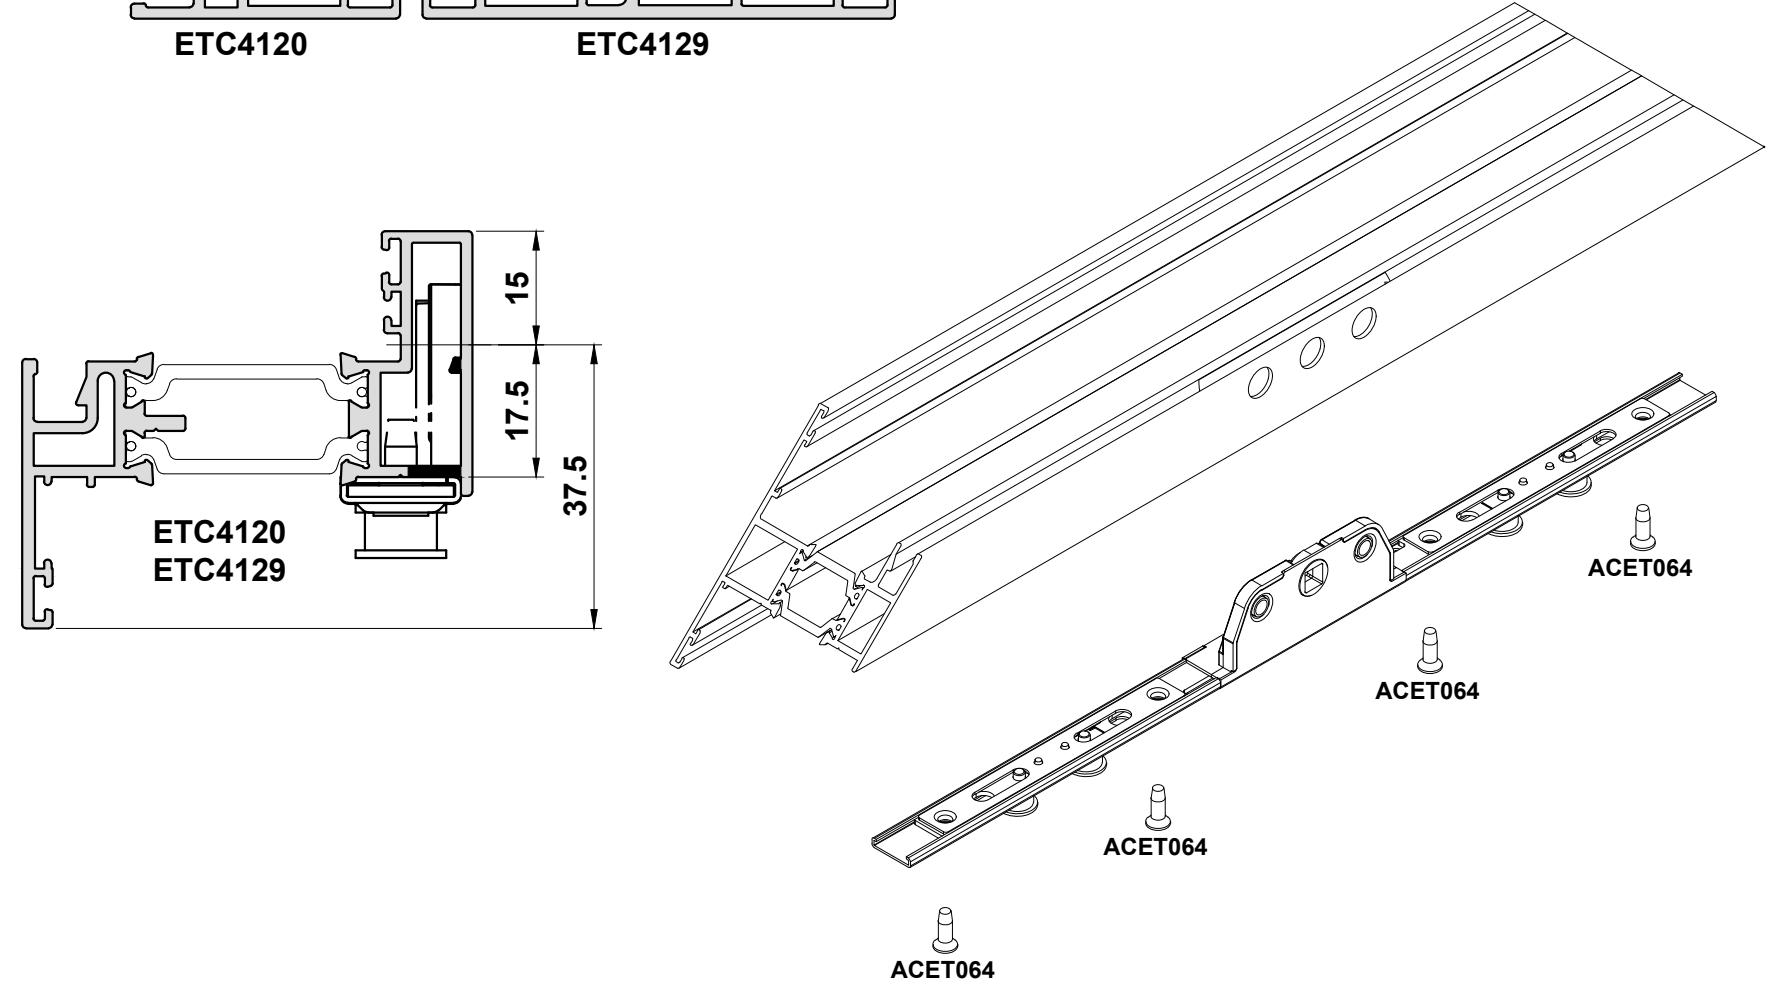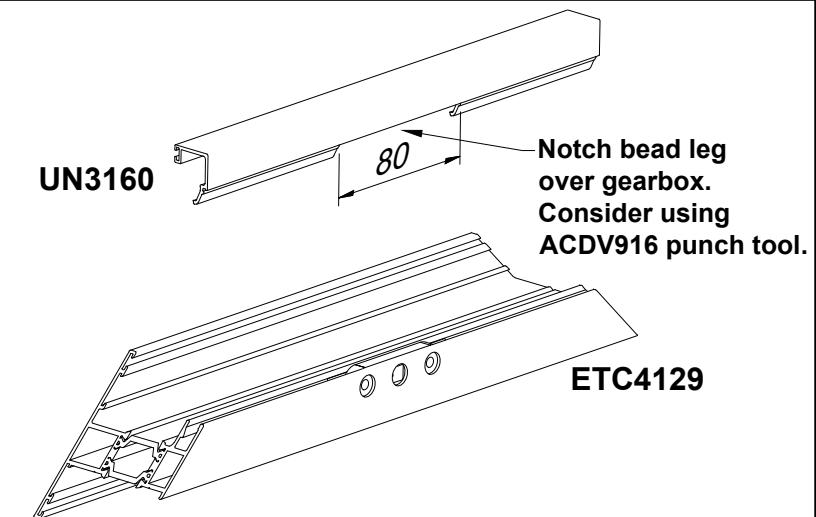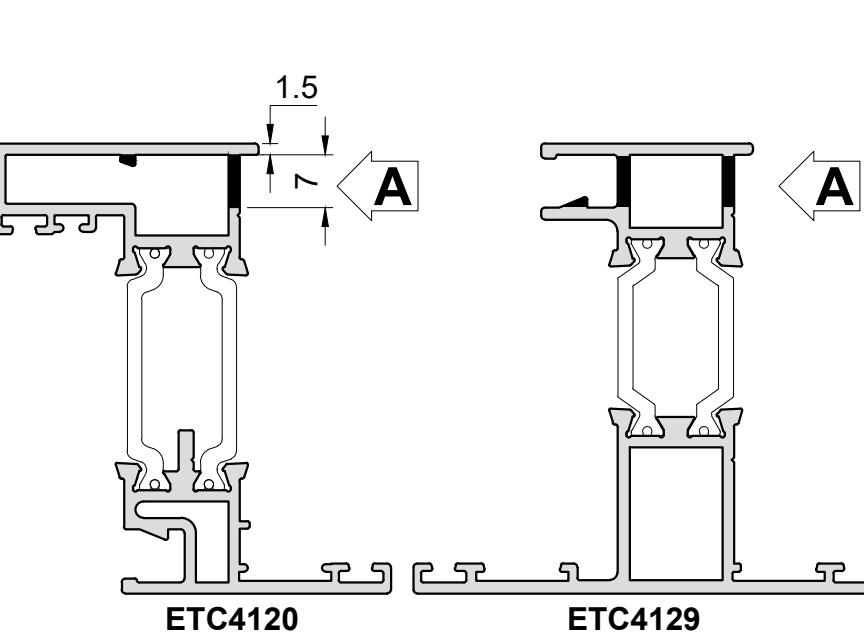


Do Not Scale From This Drawing

Alitherm 400

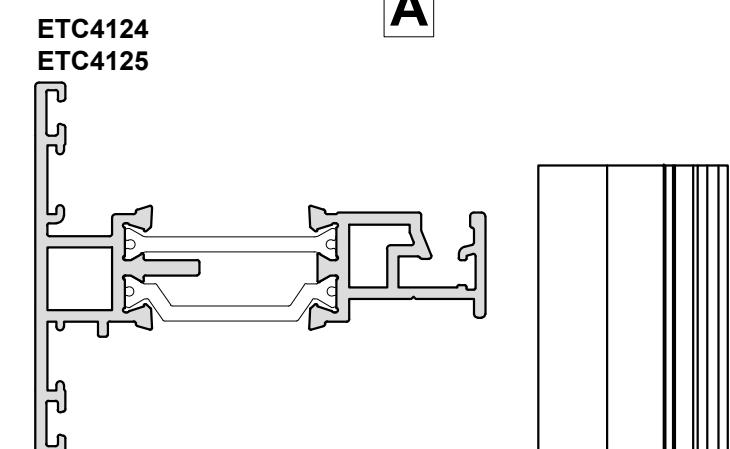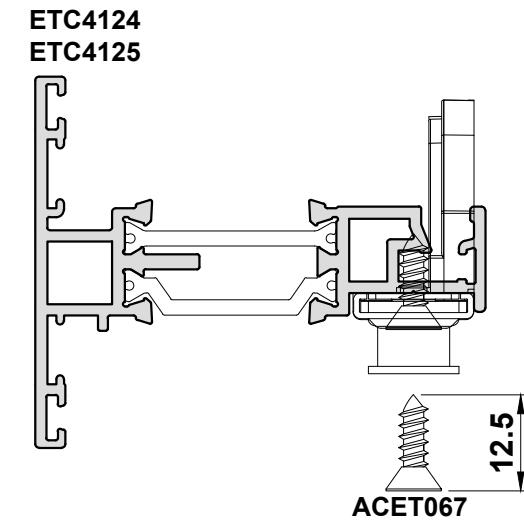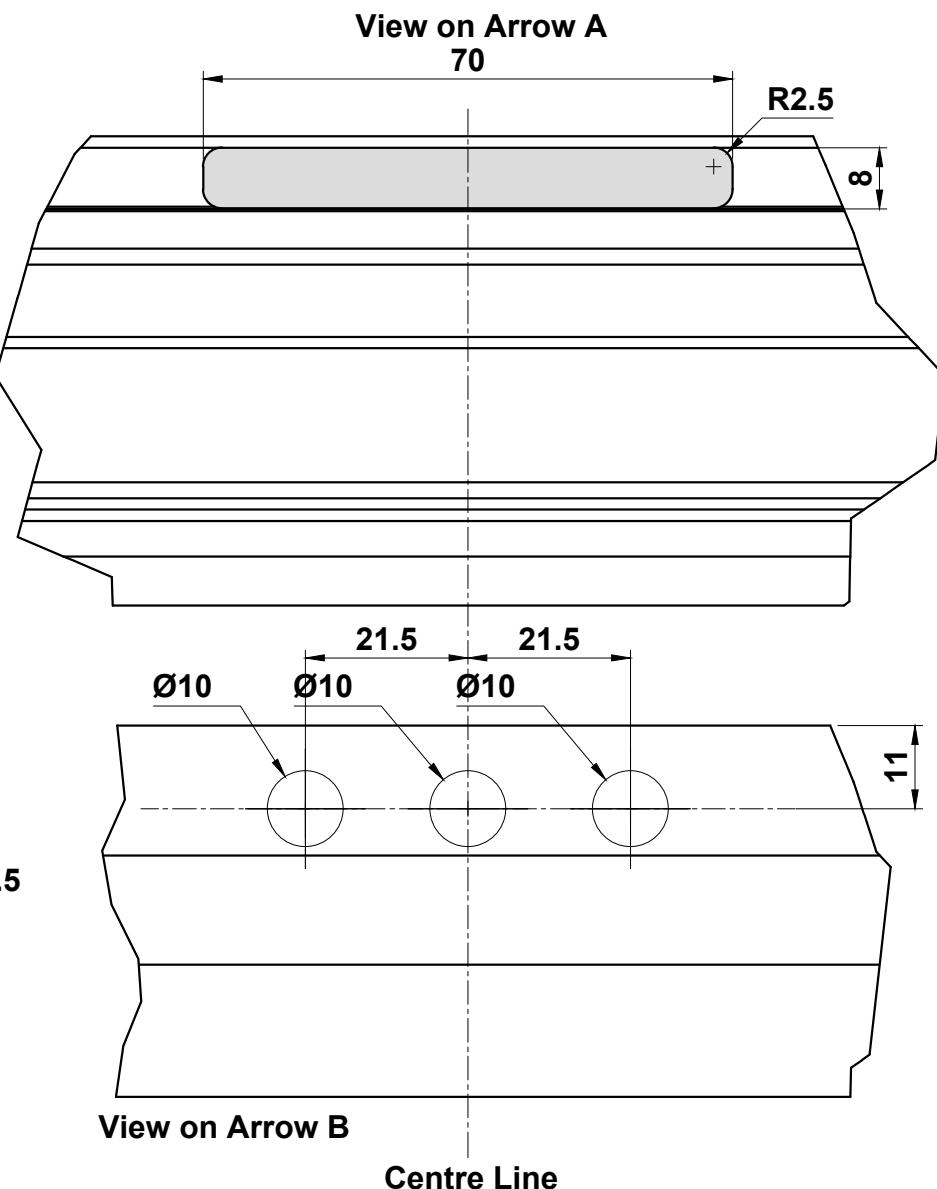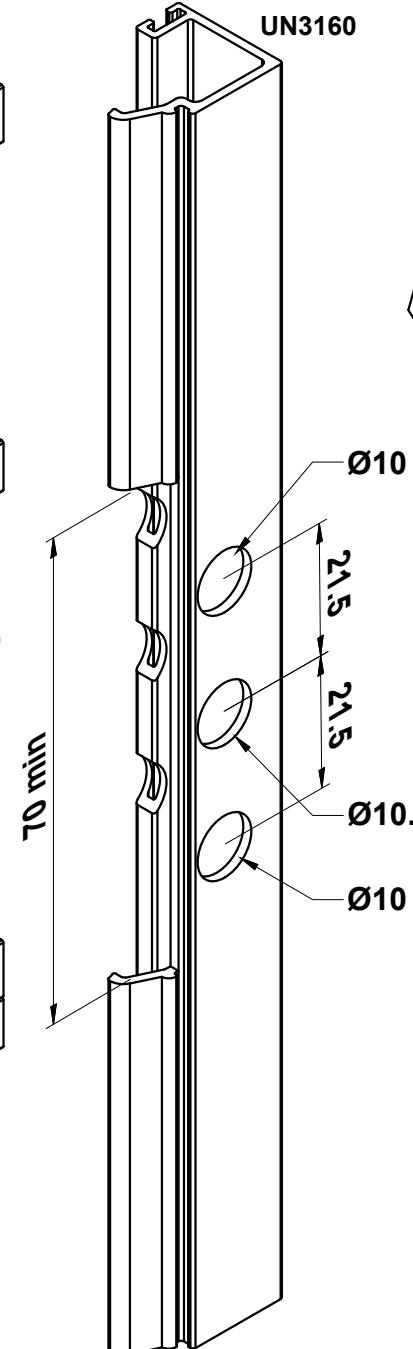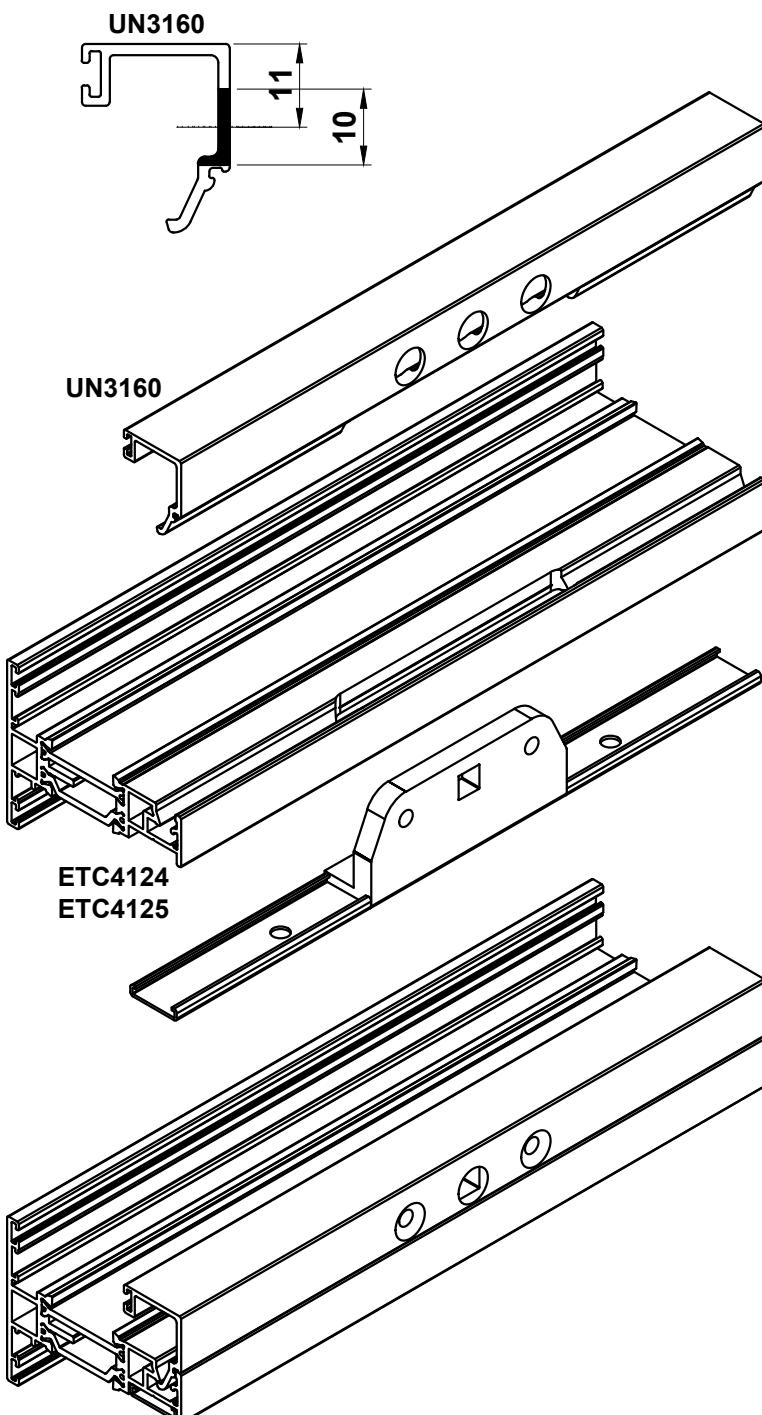Lock & Handle Machining




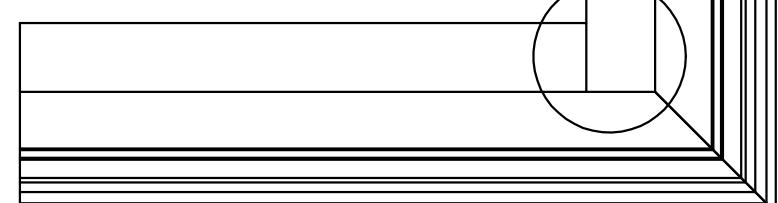For side hung vents, the vertical beads may be cut full height to avoid removing the handle when glazing.




Alitherm 400

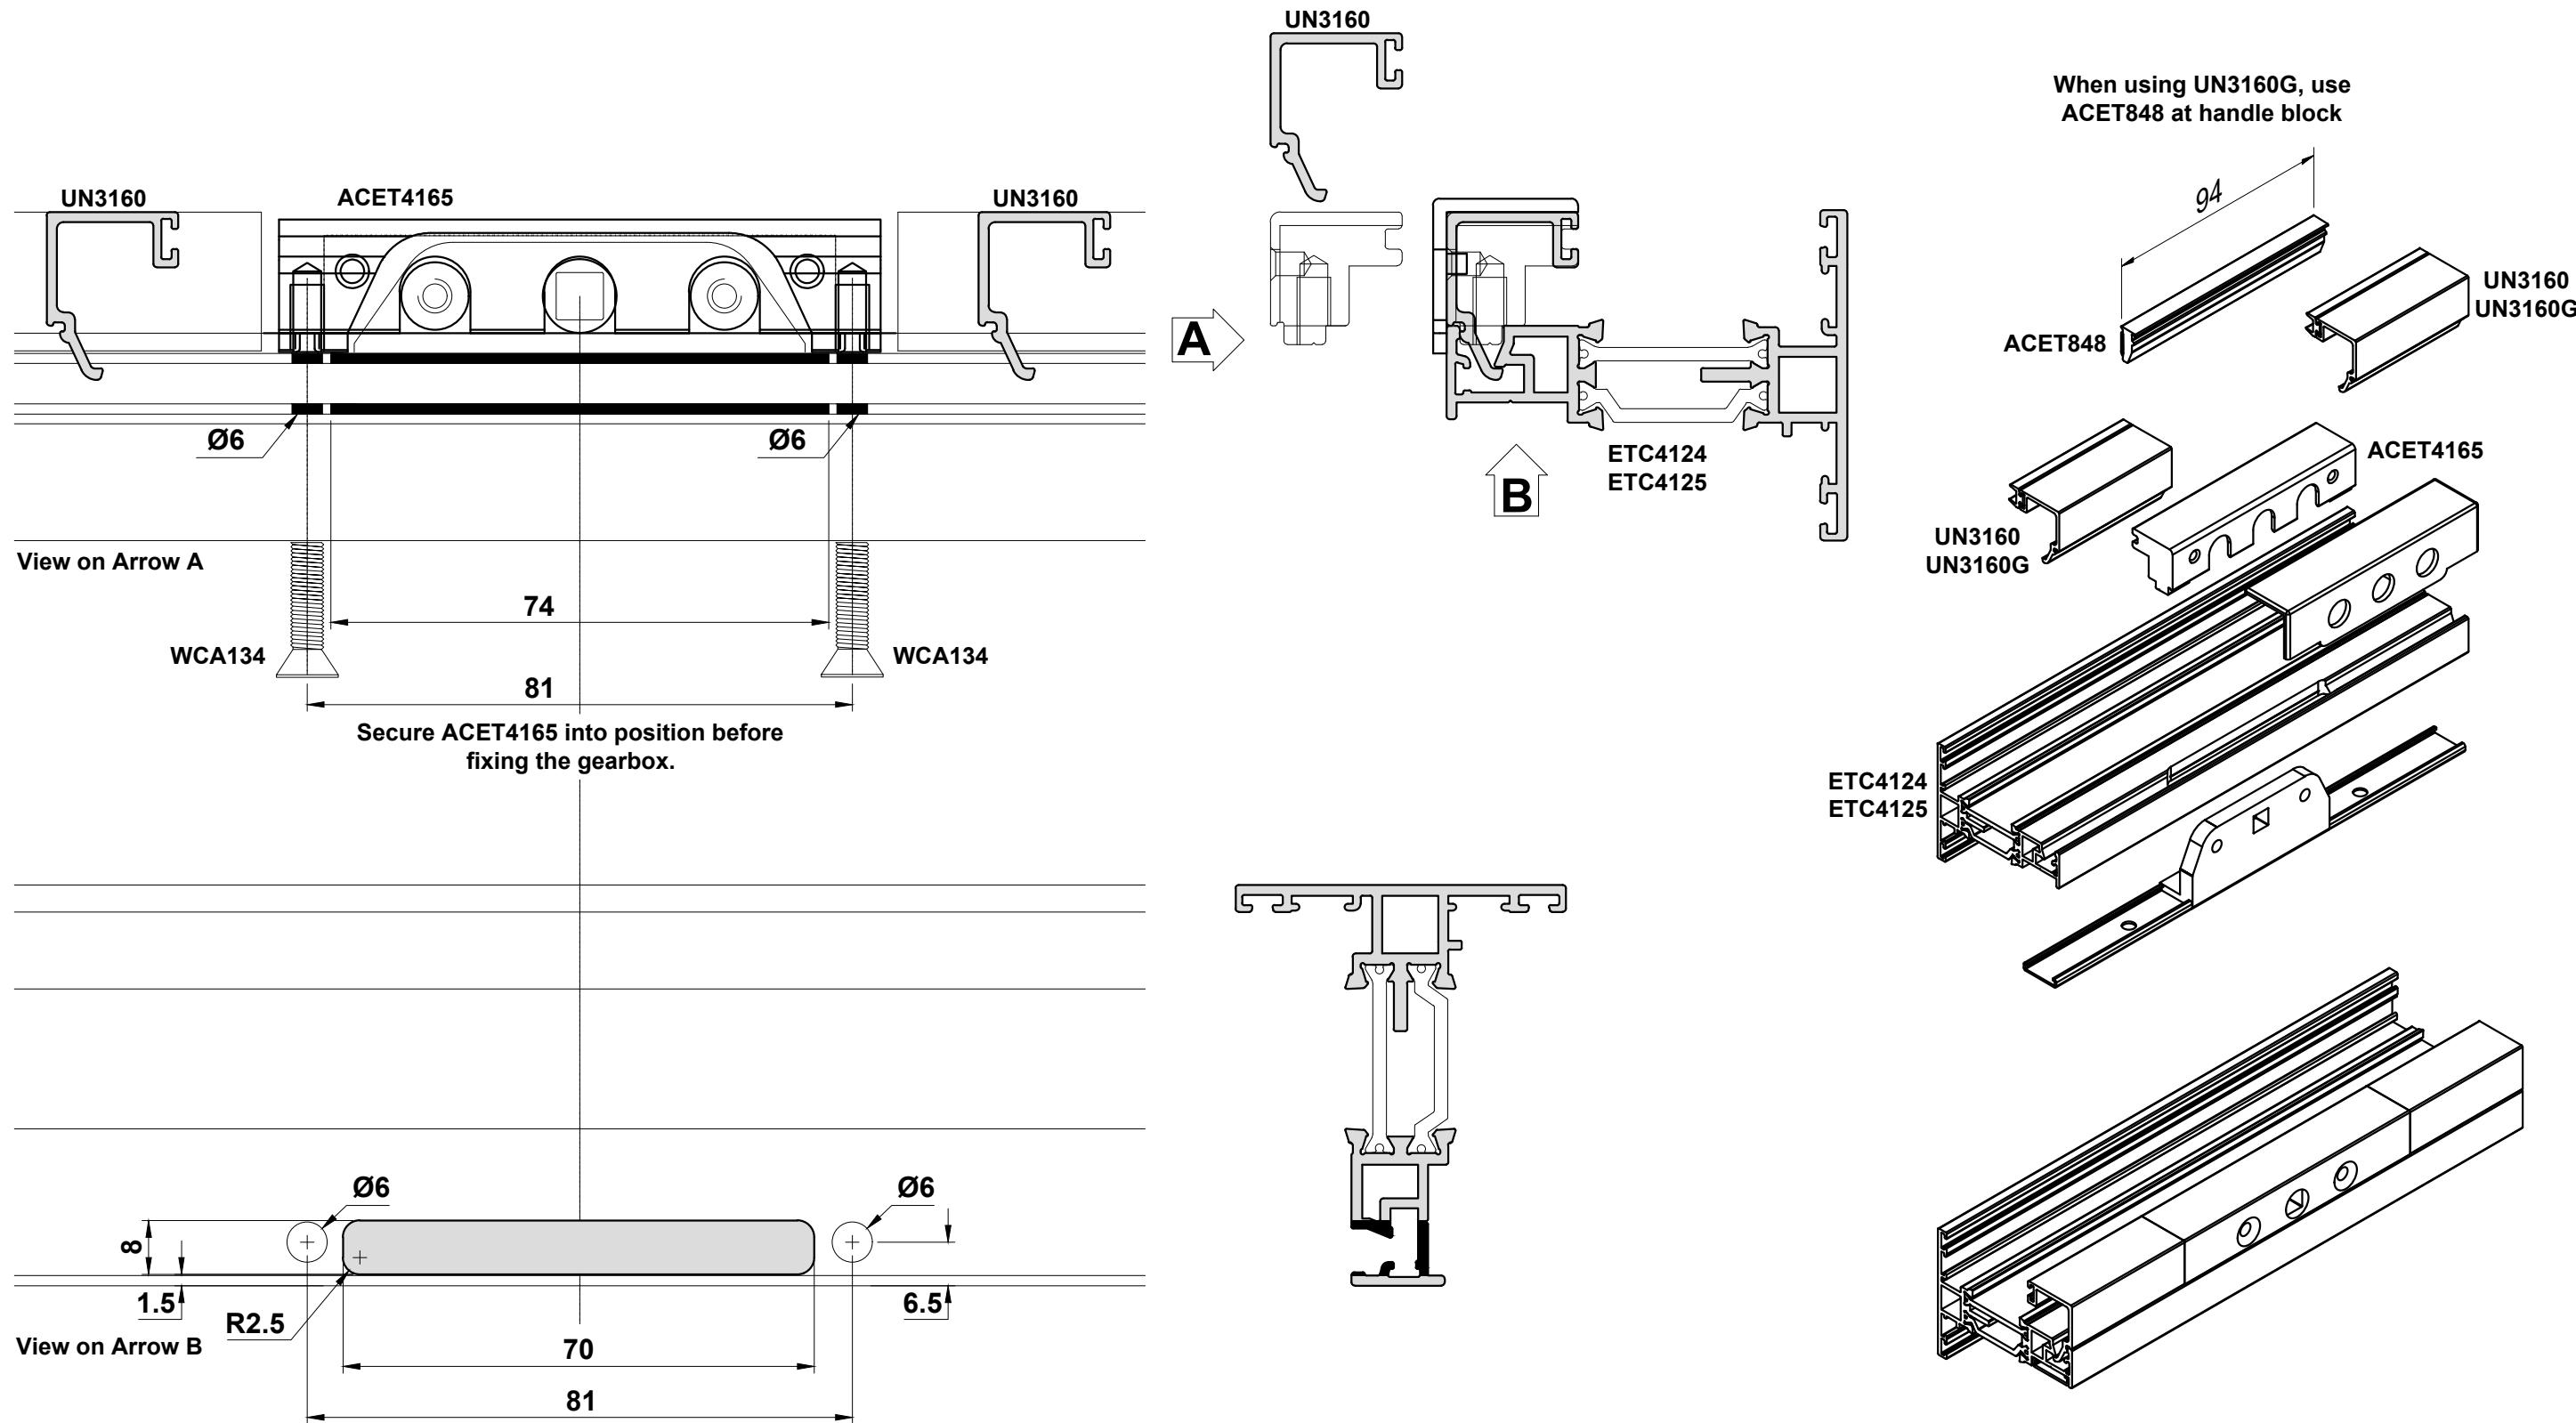Lock & Handle Machining




Do Not Scale From This Drawing

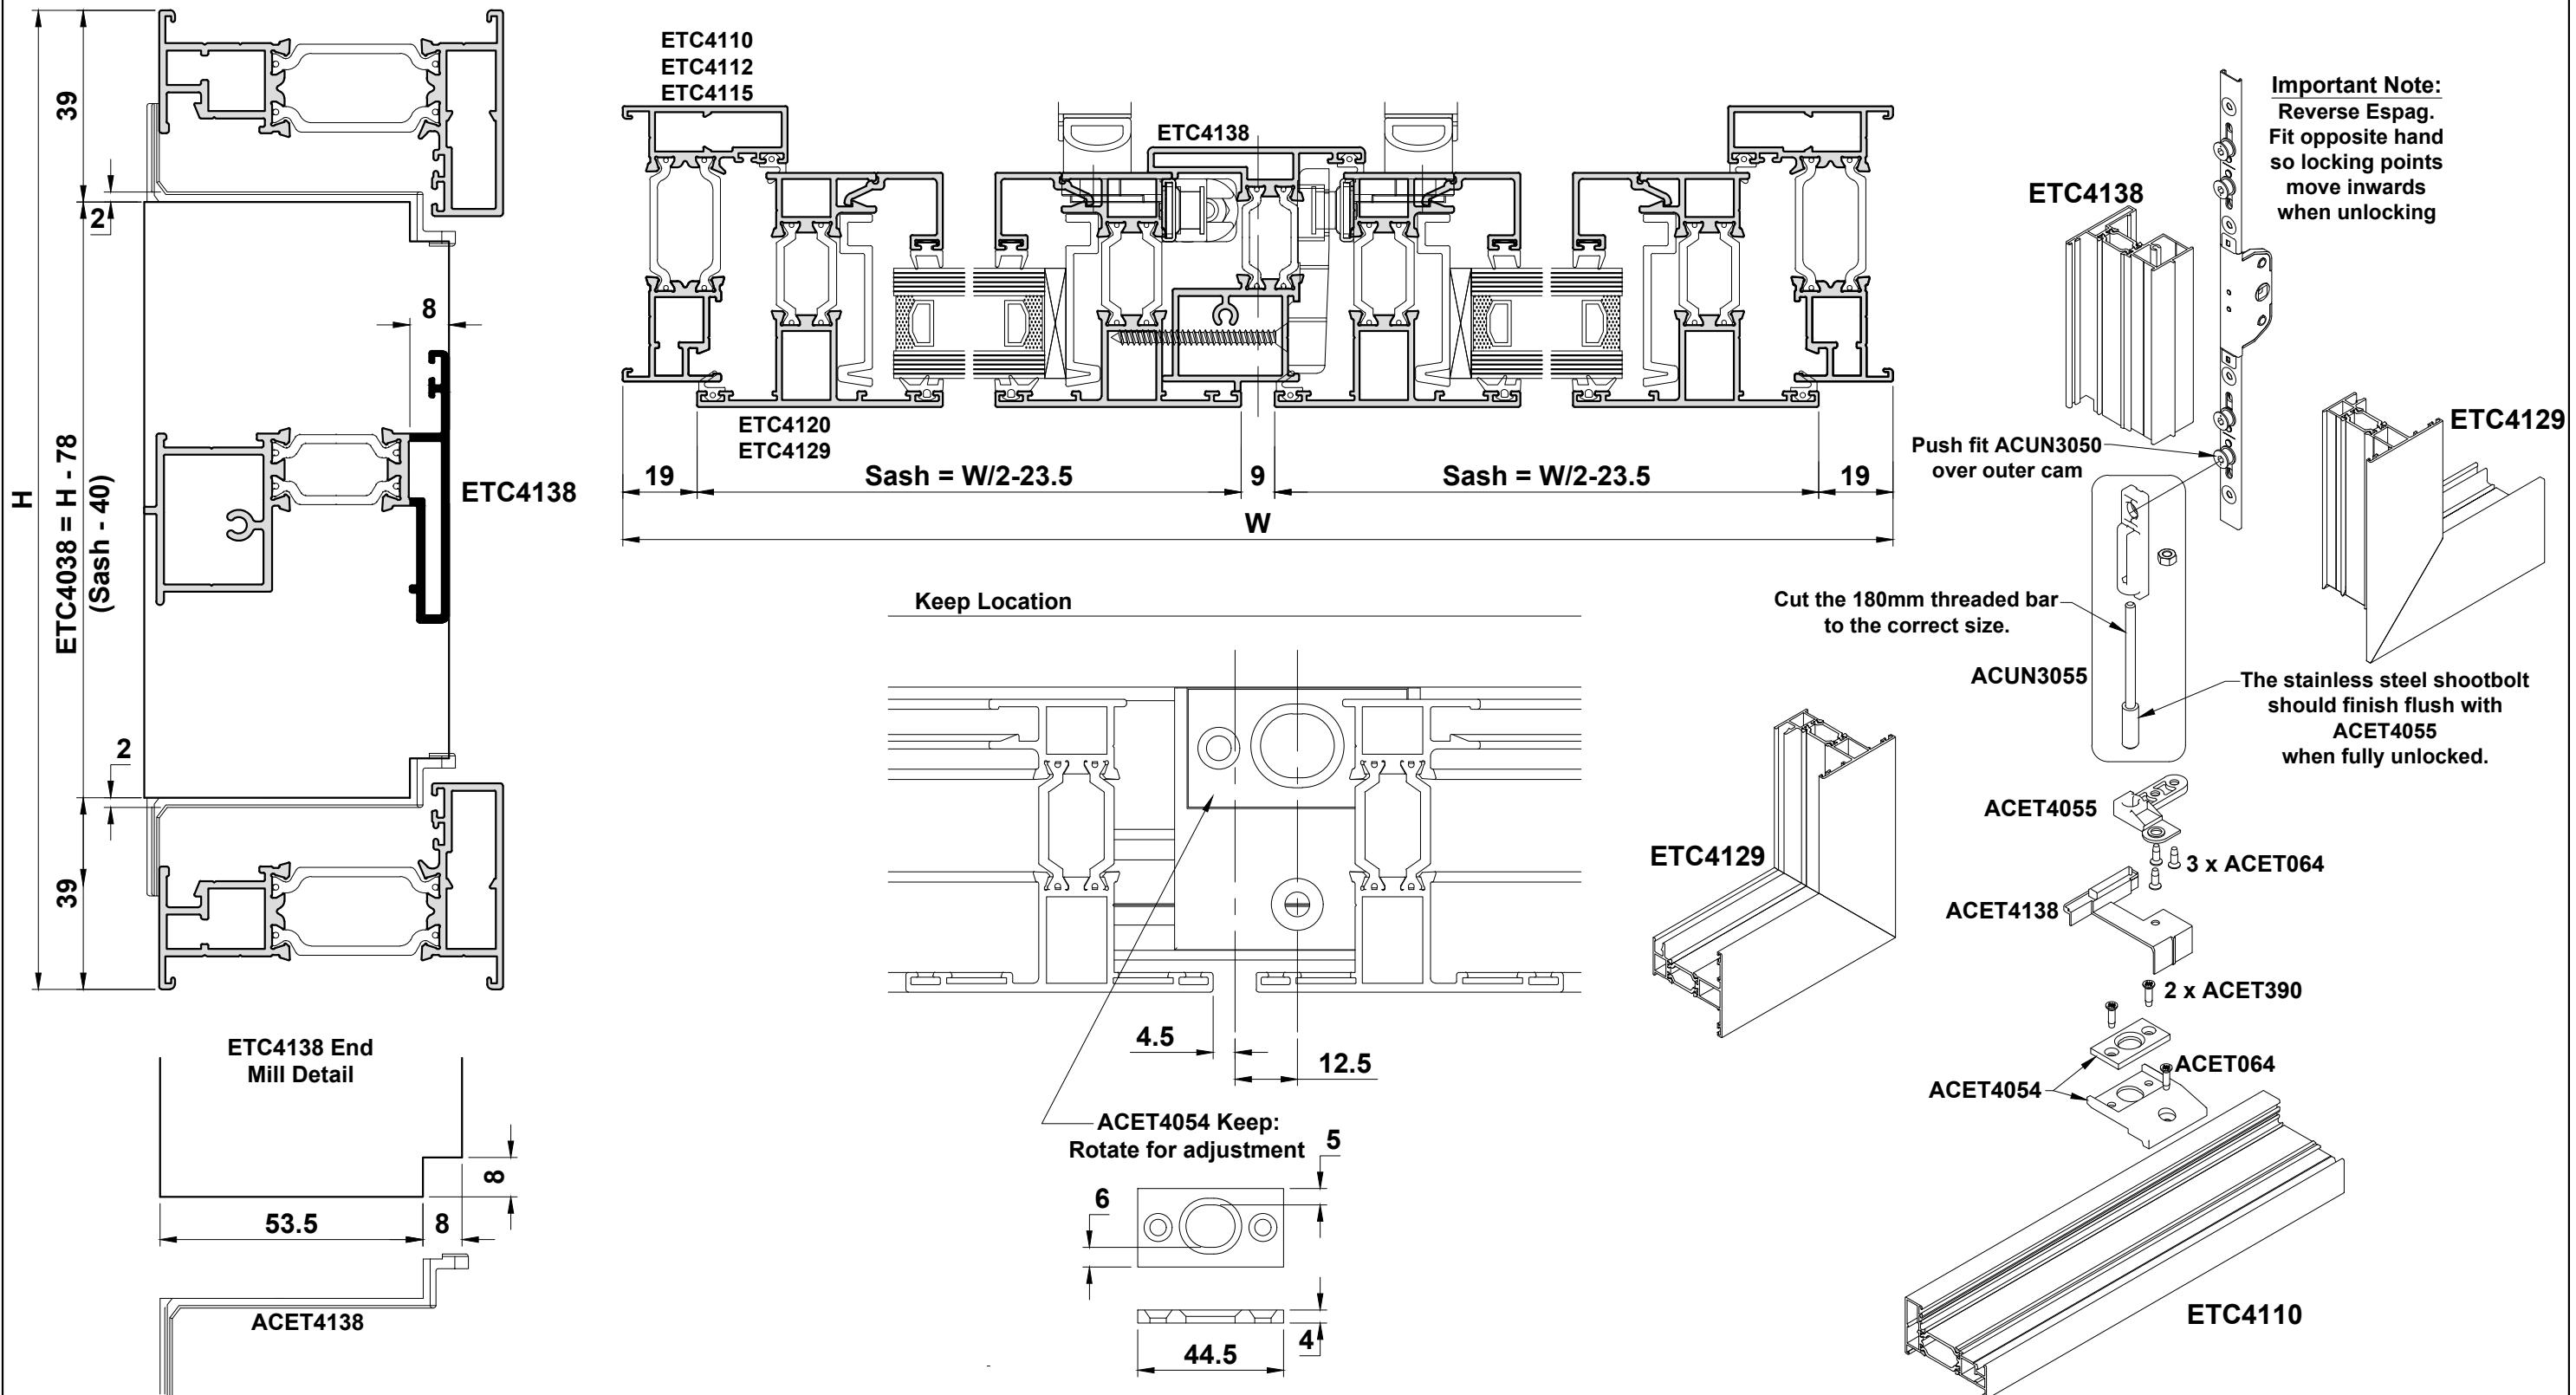French Casement Assembly




Alitherm 400

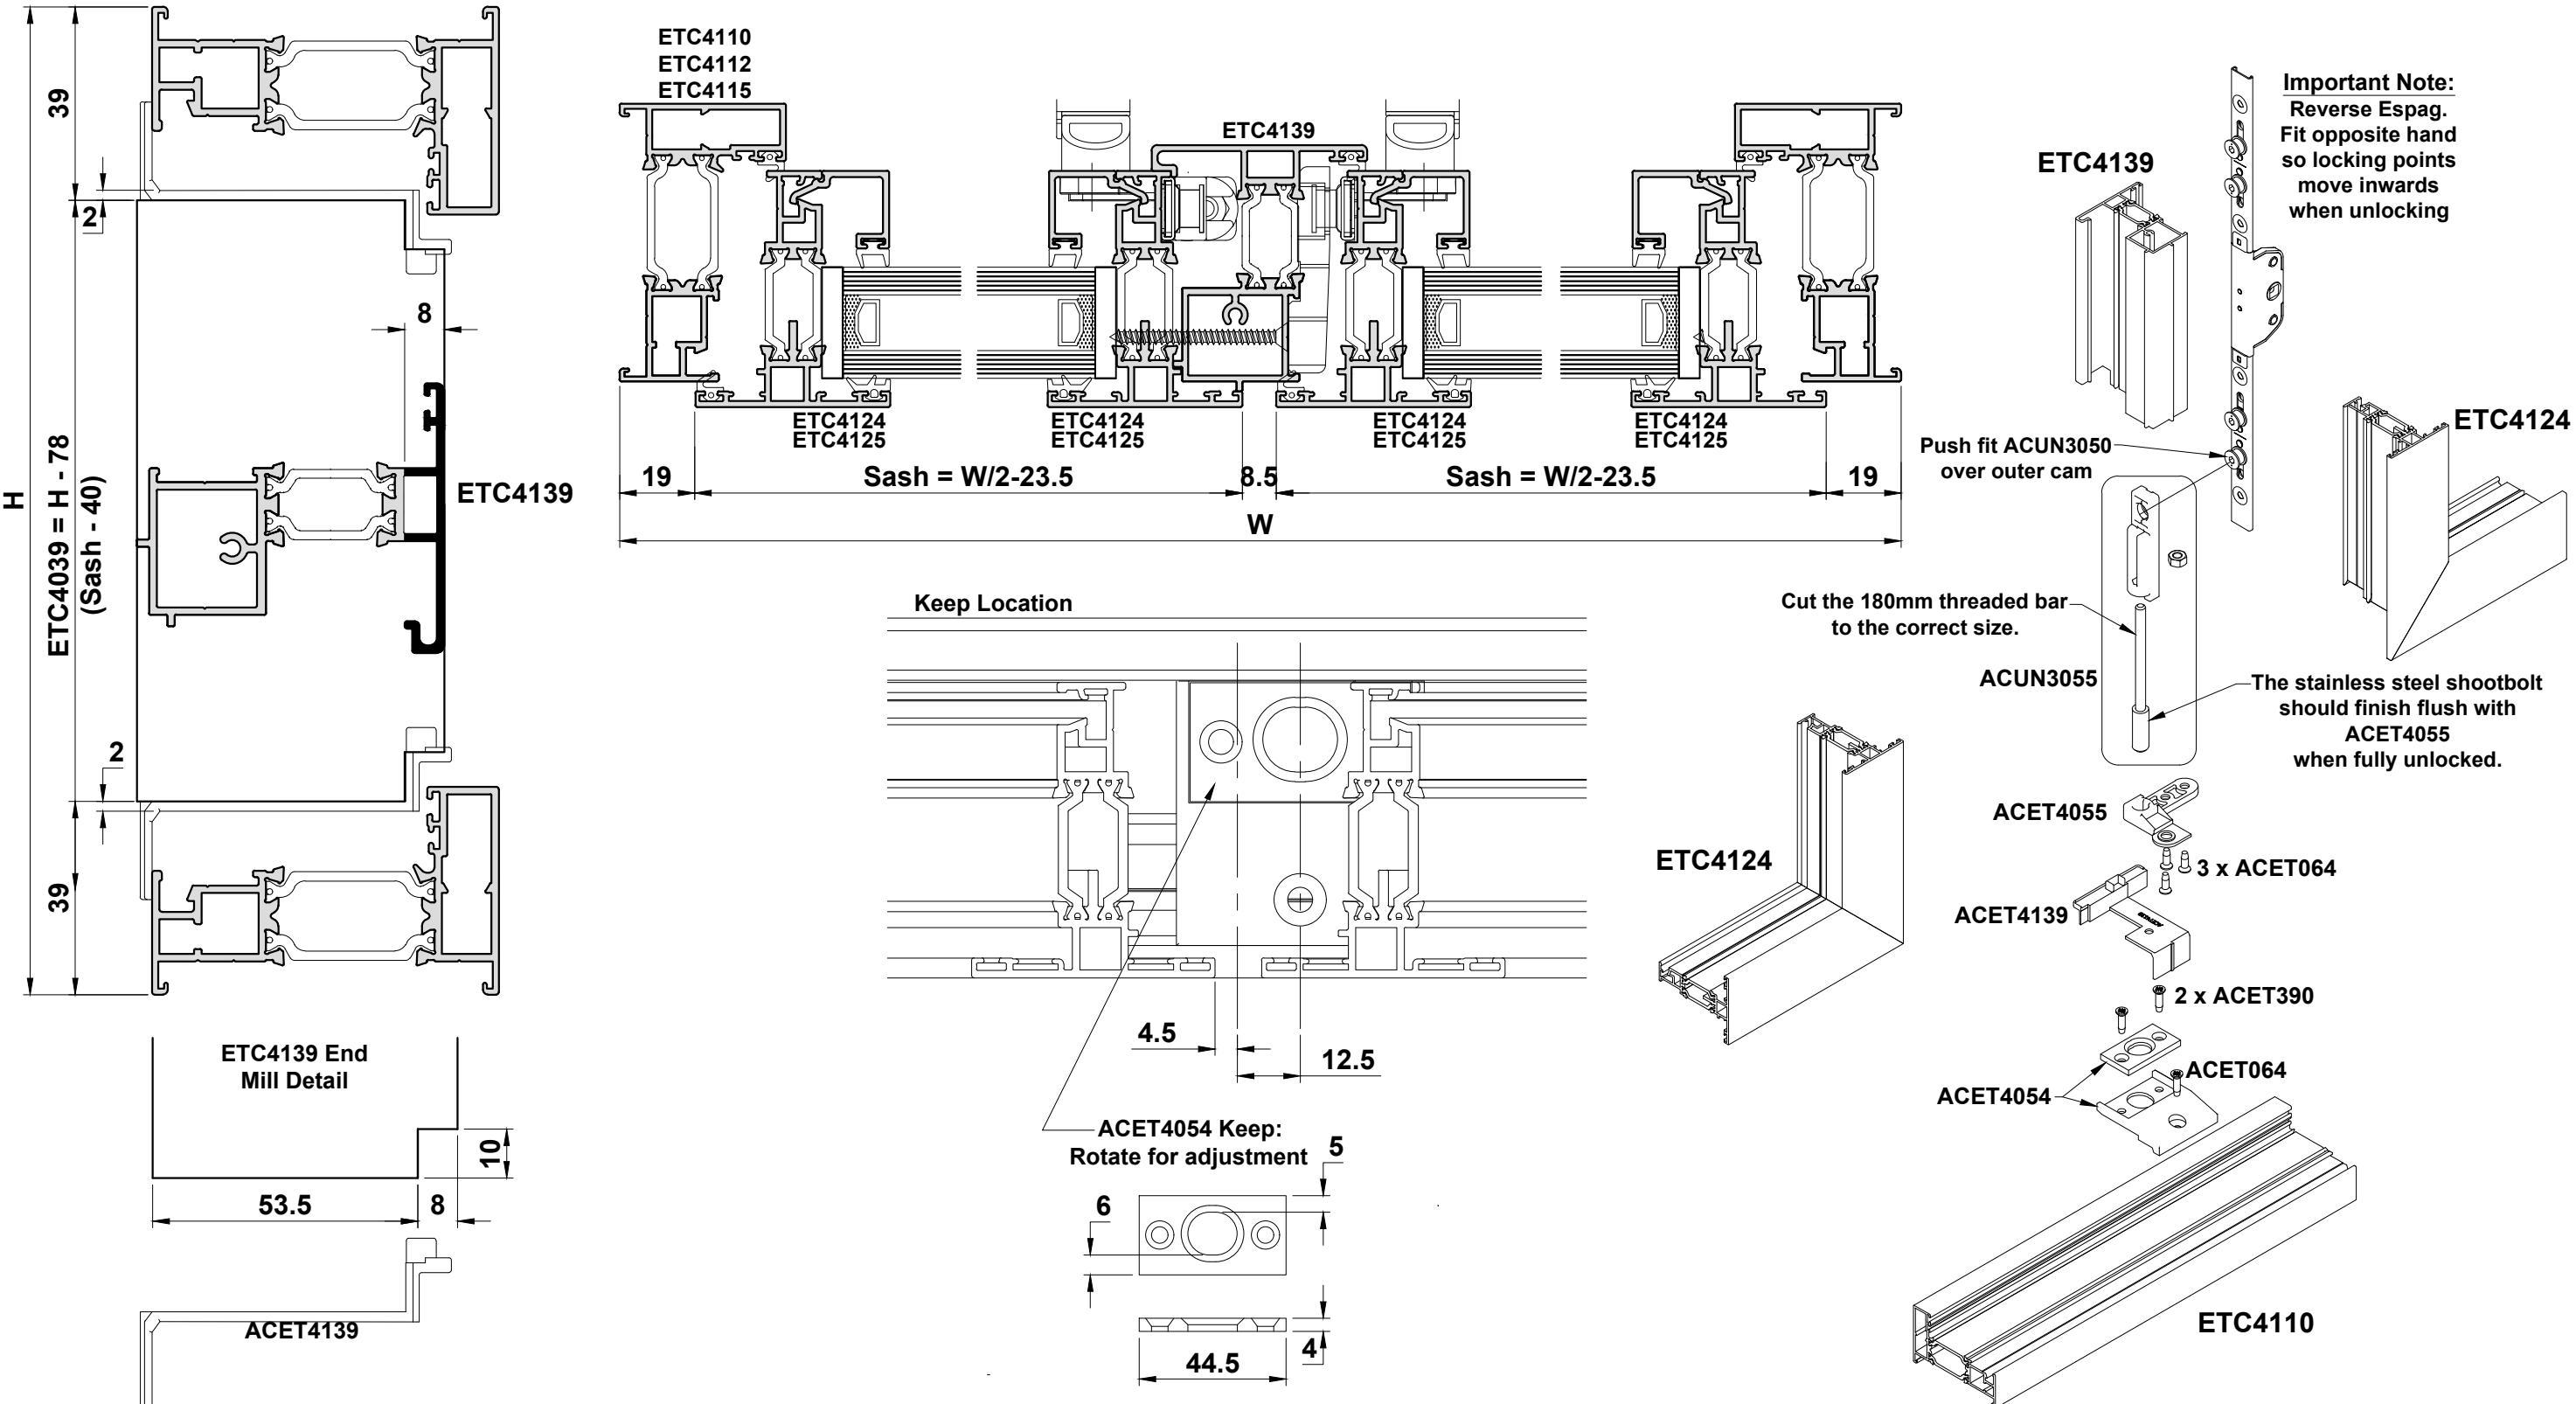French Casement Assembly




Glazing Chart

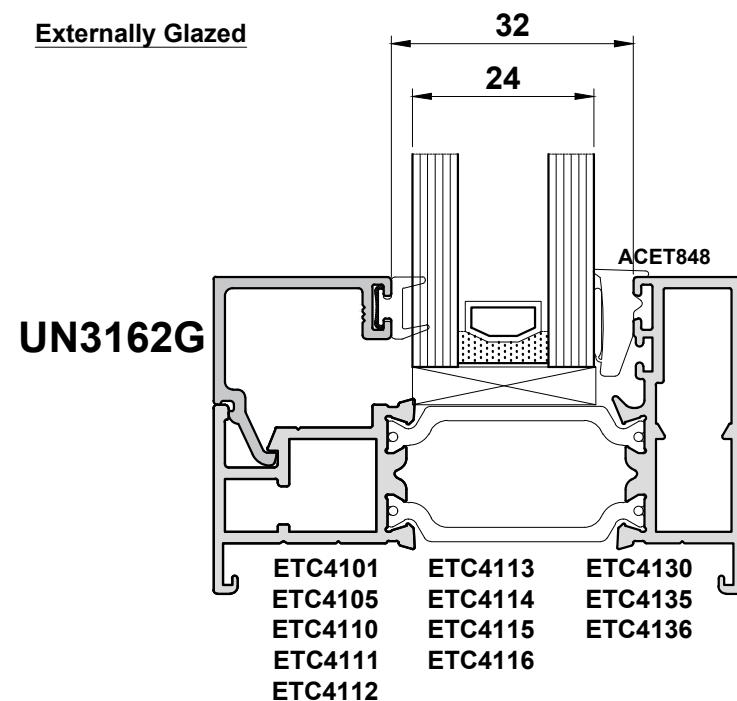
Externally Glazed




UN3164G

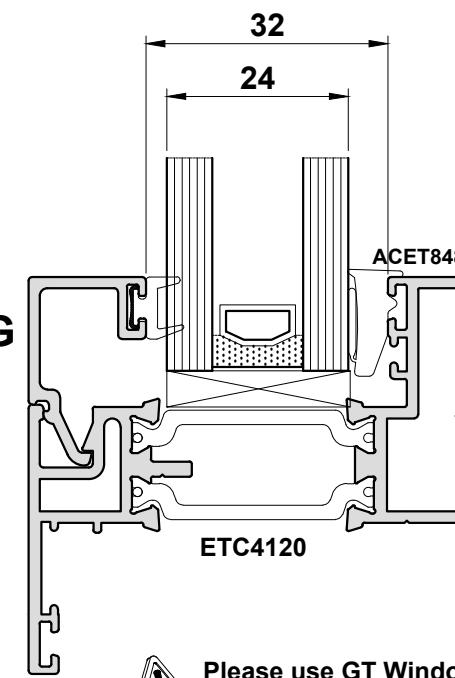


Internally Glazed

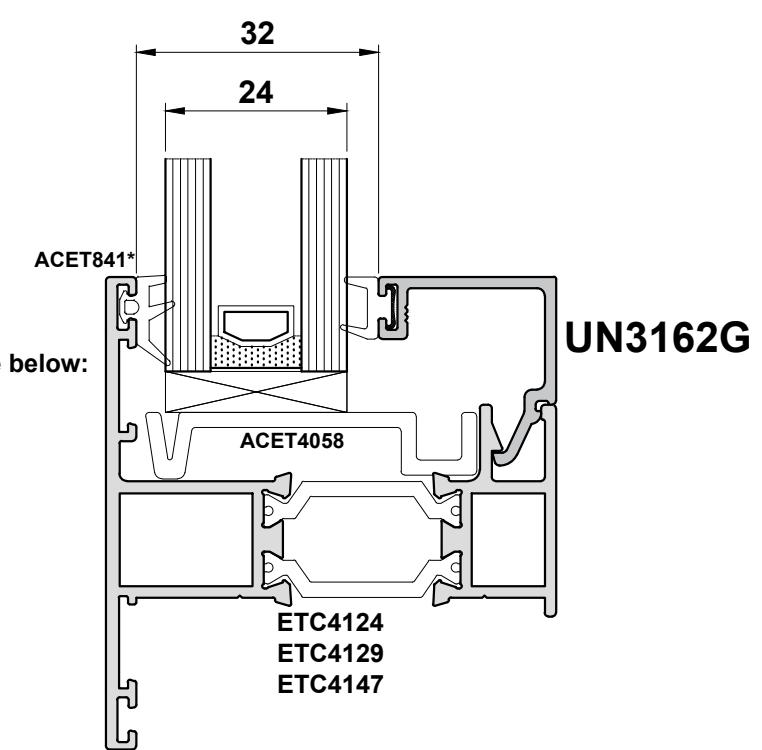


UN3162N

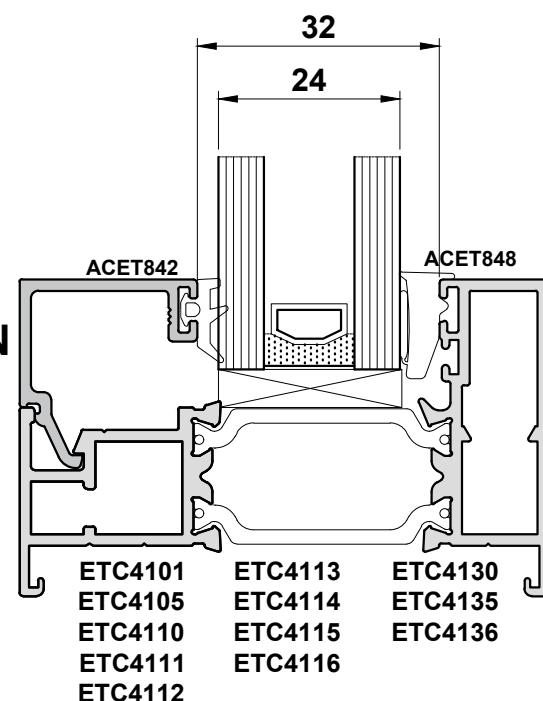

UN3164

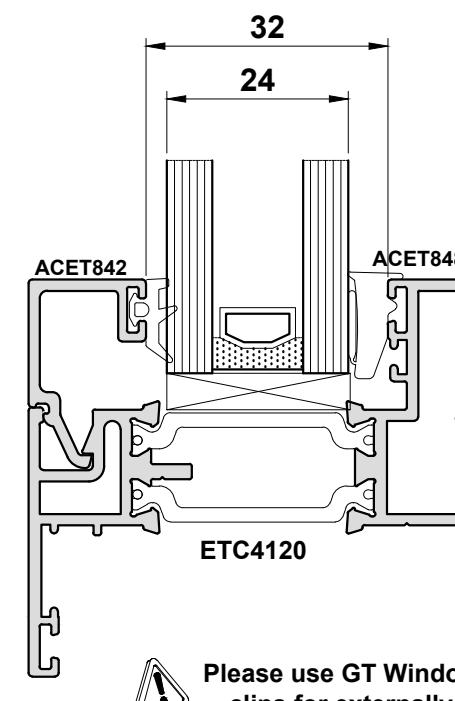

Internally Glazed

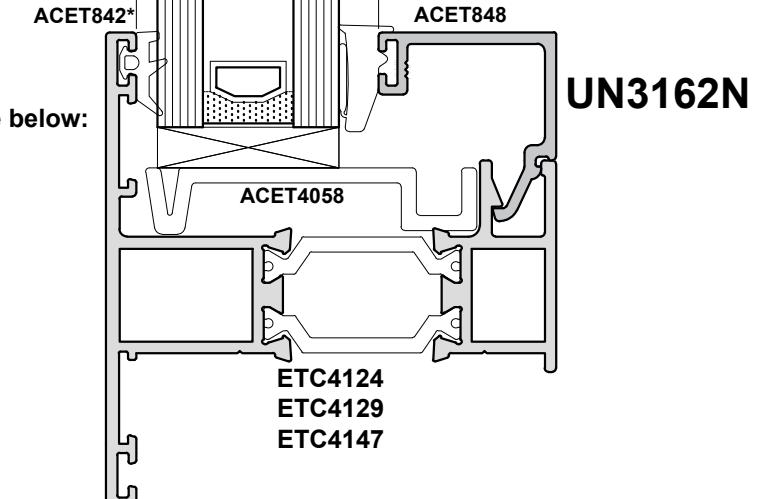


Alitherm 400

Glazing Chart


Externally Glazed

Externally glazed Alitherm 400 sections may be glazed using Quick-Glaze beads with a standard wedge gasket.

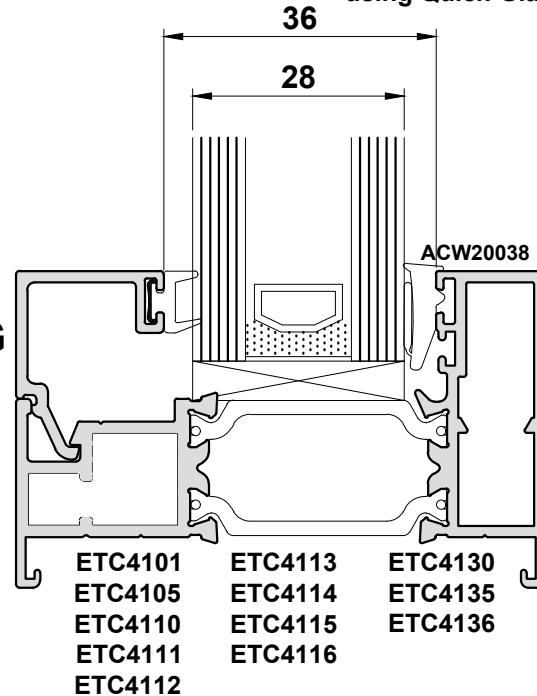UN3160G




ETC4179G

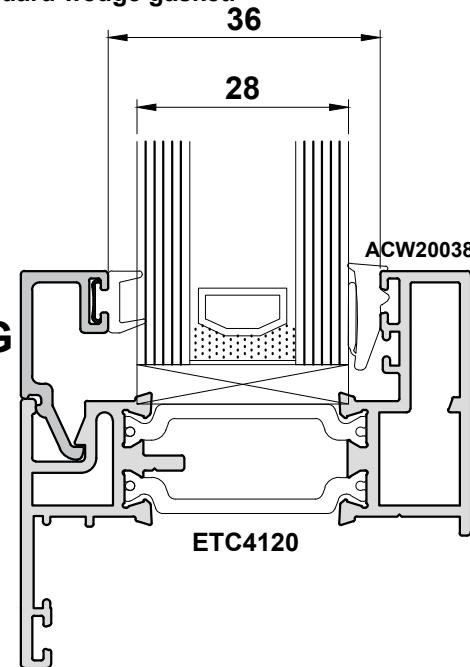


Please use GT Window Products glass clips for externally glazed profiles.

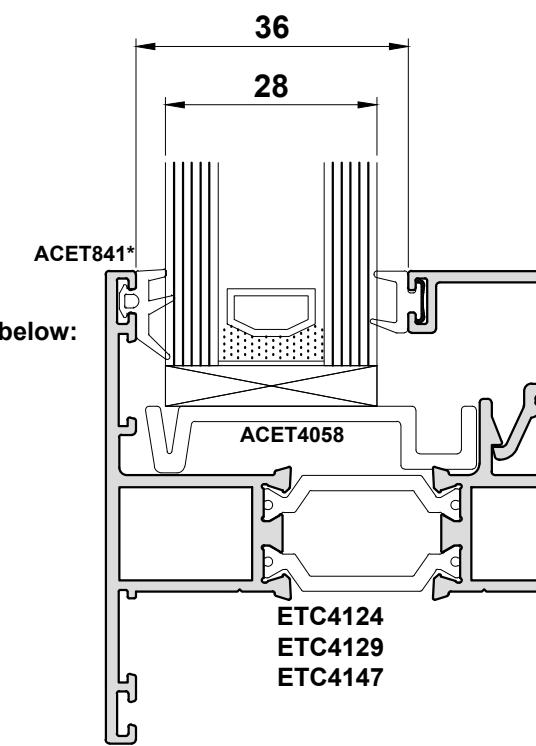Internally Glazed




UN3160G

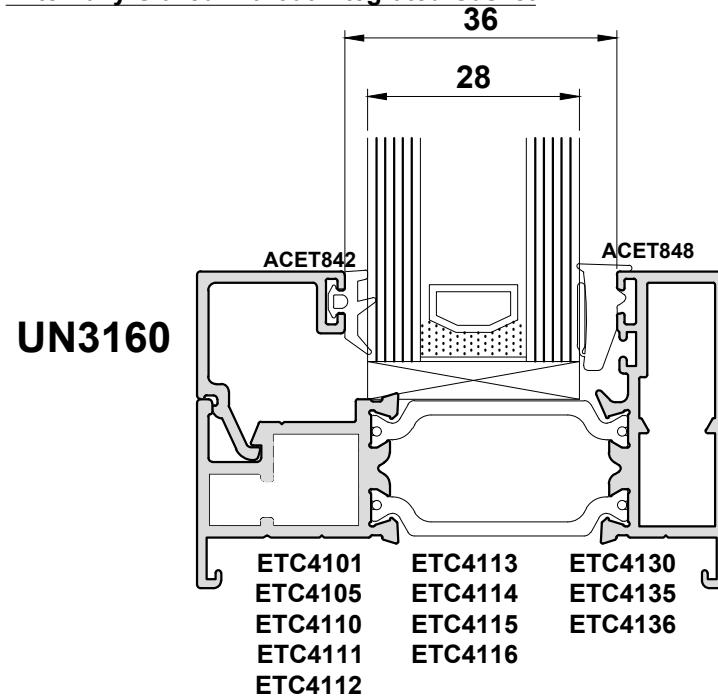Externally Glazed without Integrated Gasket




ETC4179

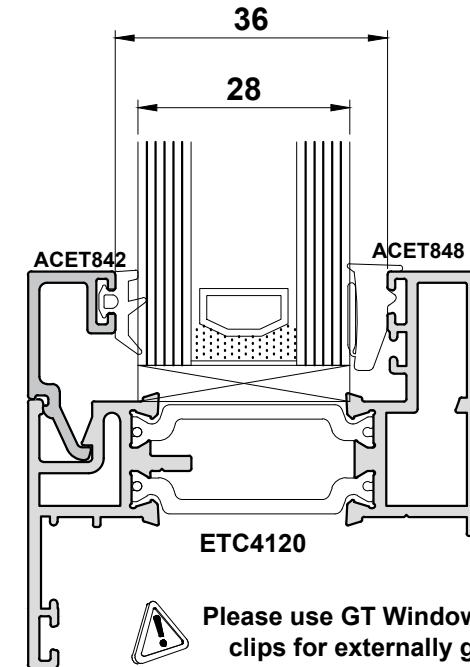

Please use GT Window Products glass clips for externally glazed profiles.

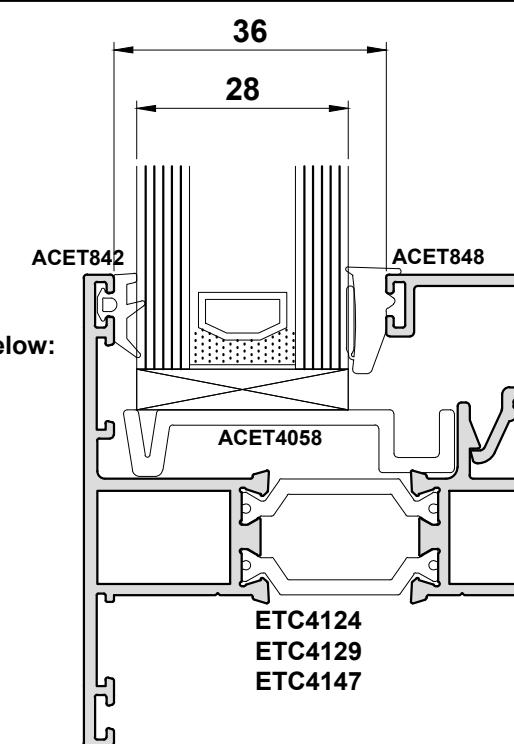Internally Glazed




UN3160


Do Not Scale From This Drawing

Quick-Glaze Bead Glass Adjuster

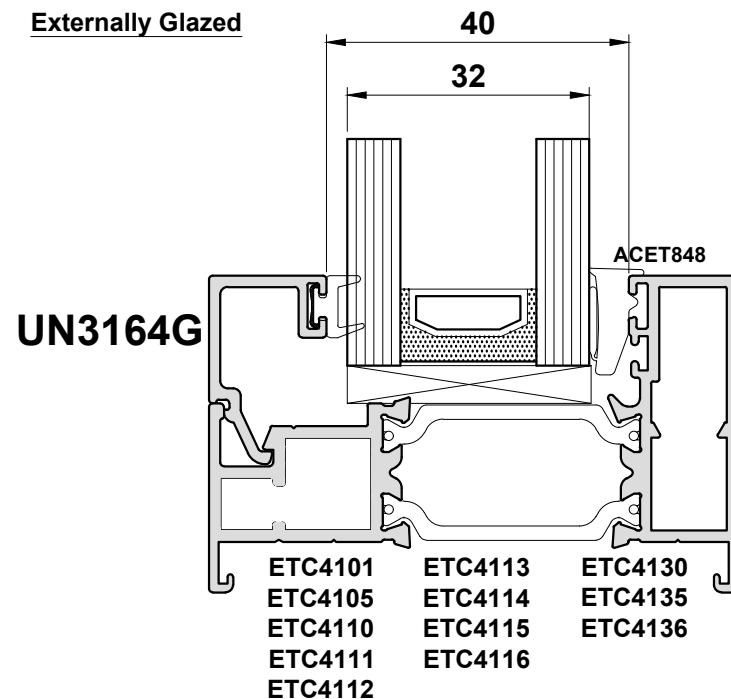
Externally Glazed




Internally Glazed

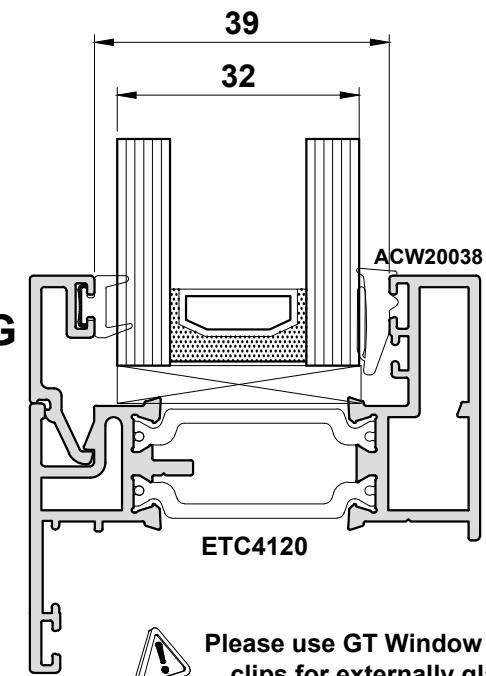


* ACET841 not required for ETC4129G

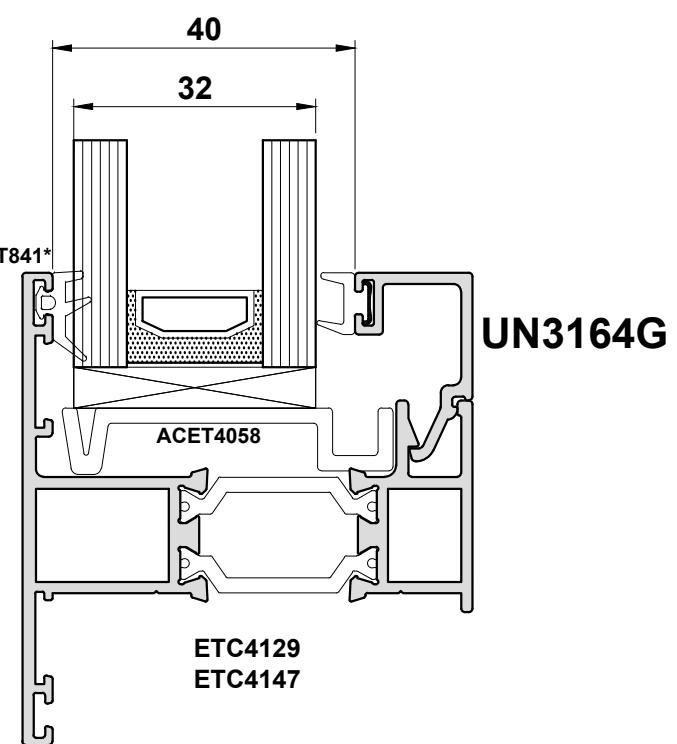


Externally Glazed

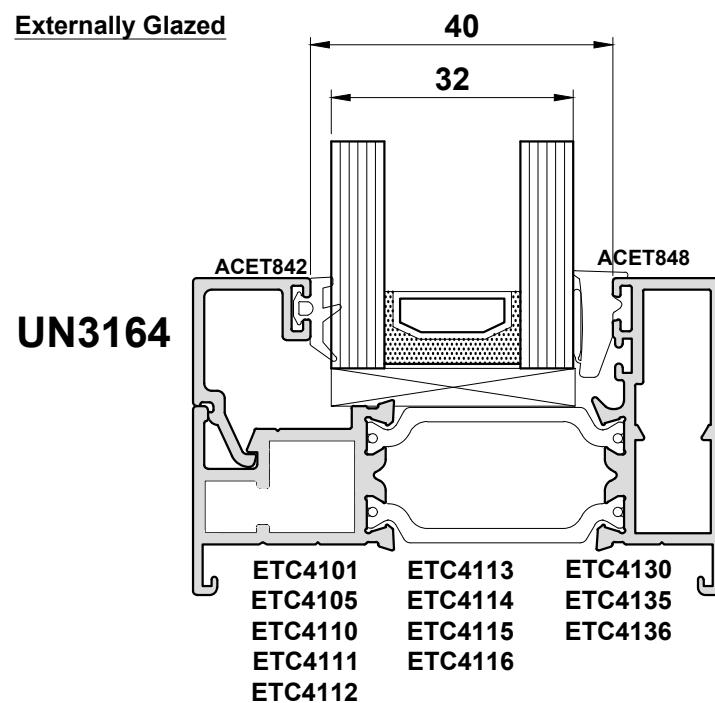

Internally Glazed

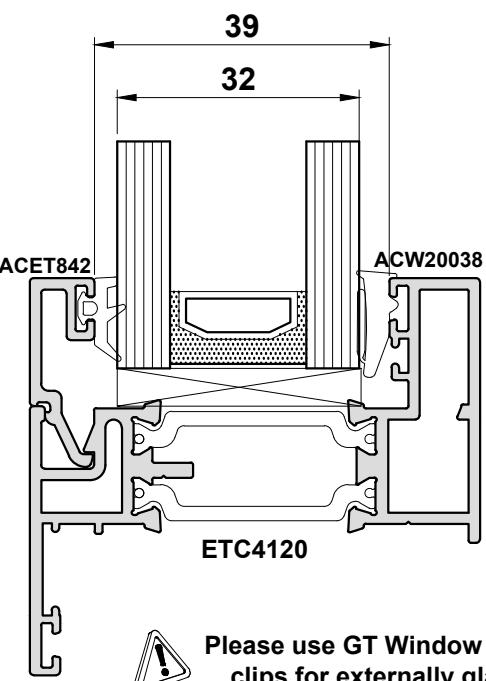


* ACET842 not required for ETC4129G

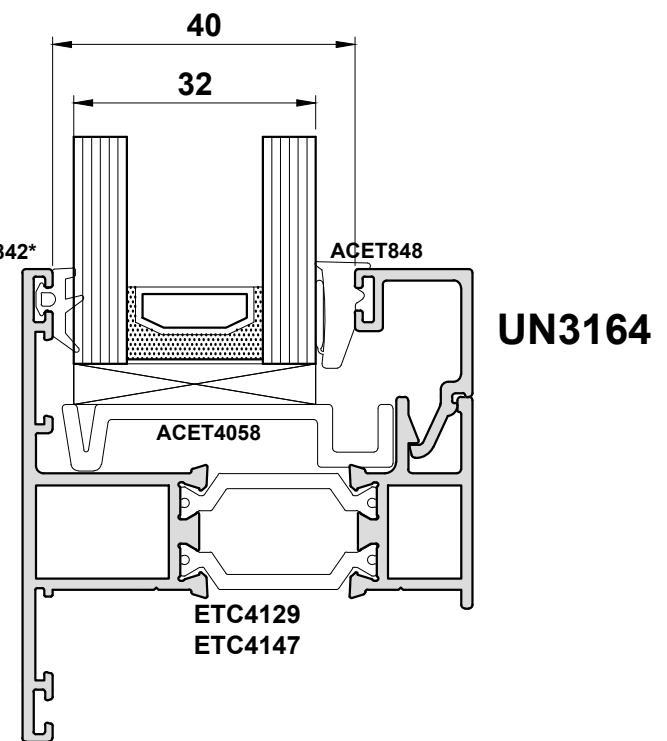

Alitherm 400


Externally Glazed

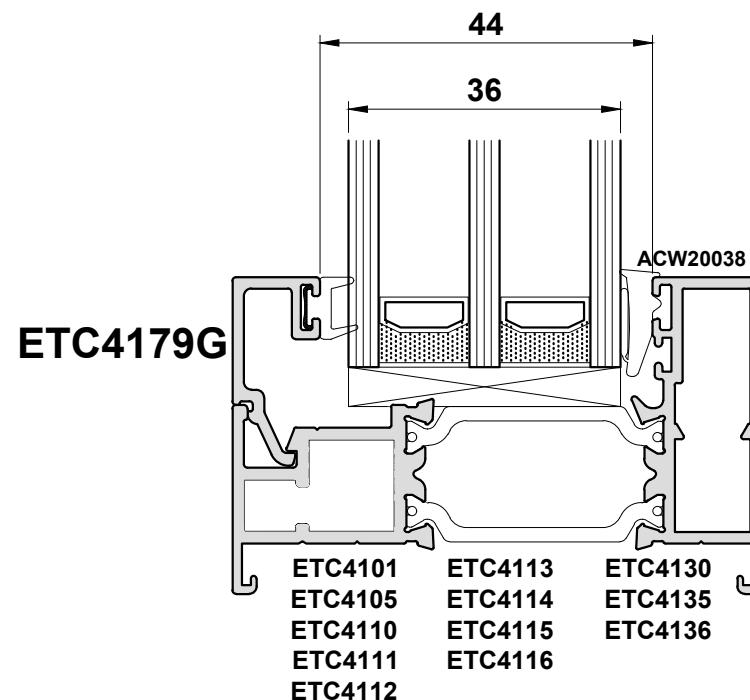Externally glazed Alitherm 400 sections may be glazed using Quick-Glaze beads with a standard wedge gasket.




Please use GT Window Products glass clips for externally glazed profiles.

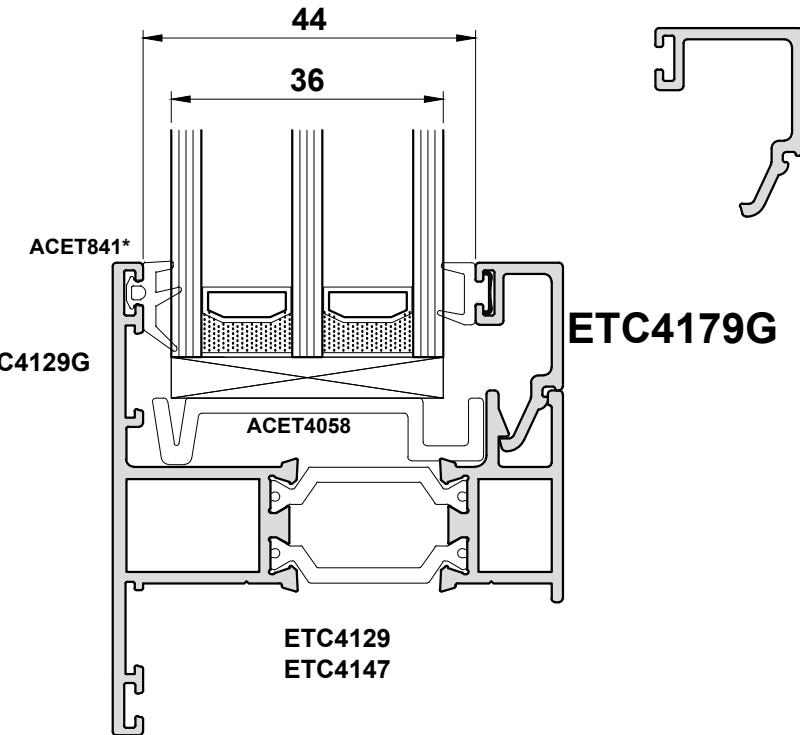Internally Glazed




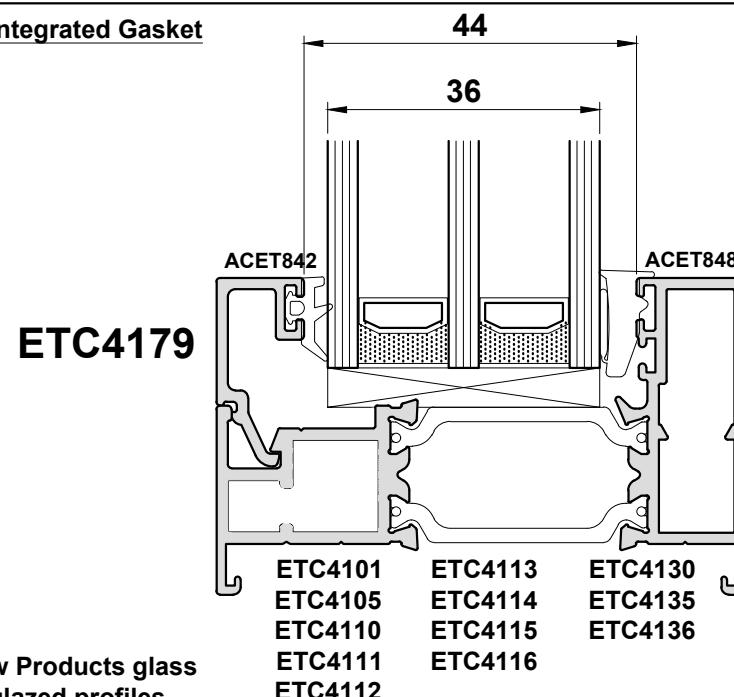Externally Glazed without Integrated Gasket




Please use GT Window Products glass clips for externally glazed profiles.

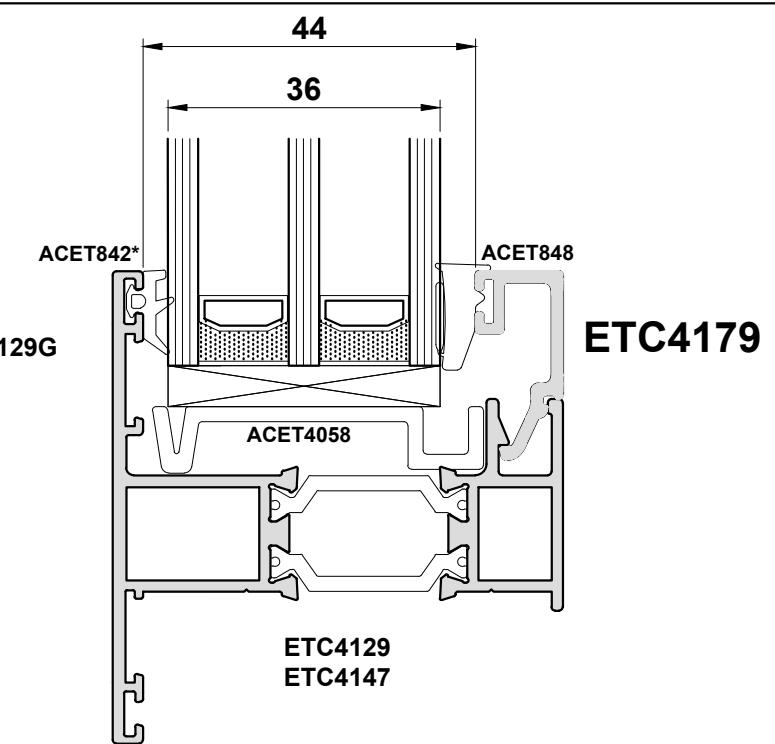
Internally Glazed



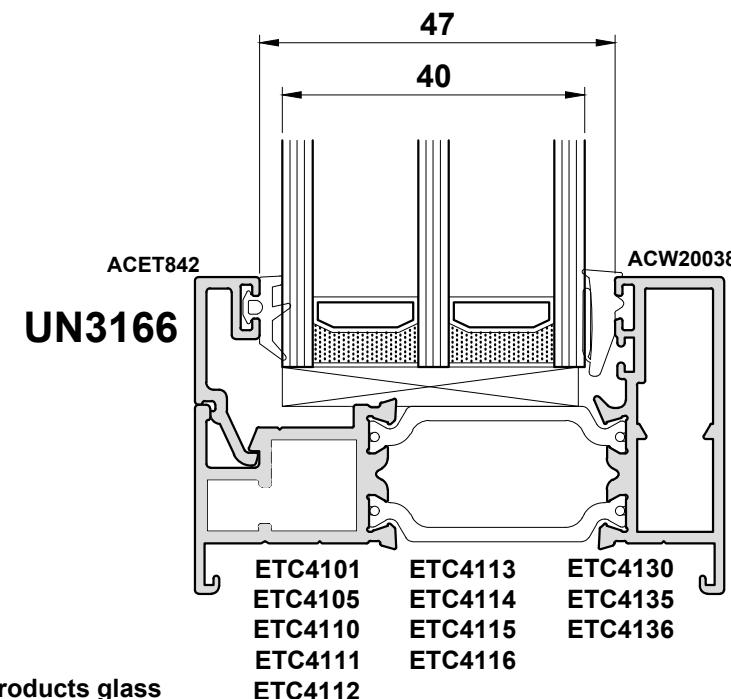Externally Glazed without Integrated Gasket



Internally Glazed

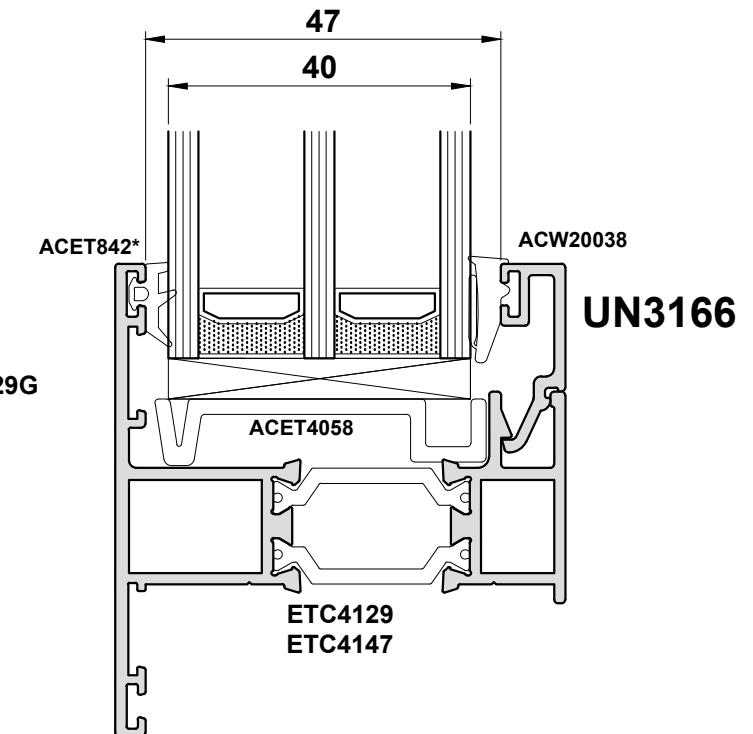


* ACET842 not required ETC4129G







Please use GT Window Products glass clips for externally glazed profiles.

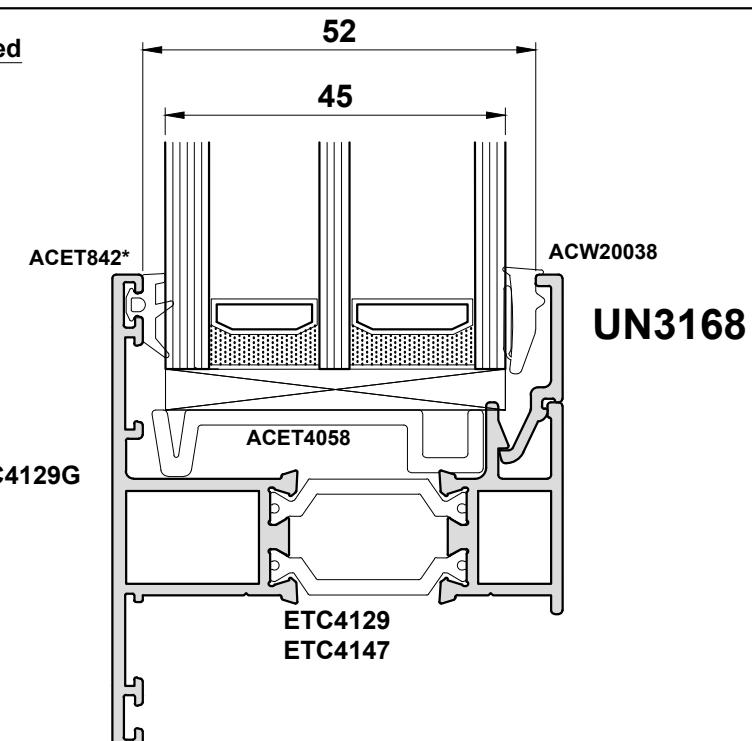Internally Glazed



* ACET842 not required for ETC4129G

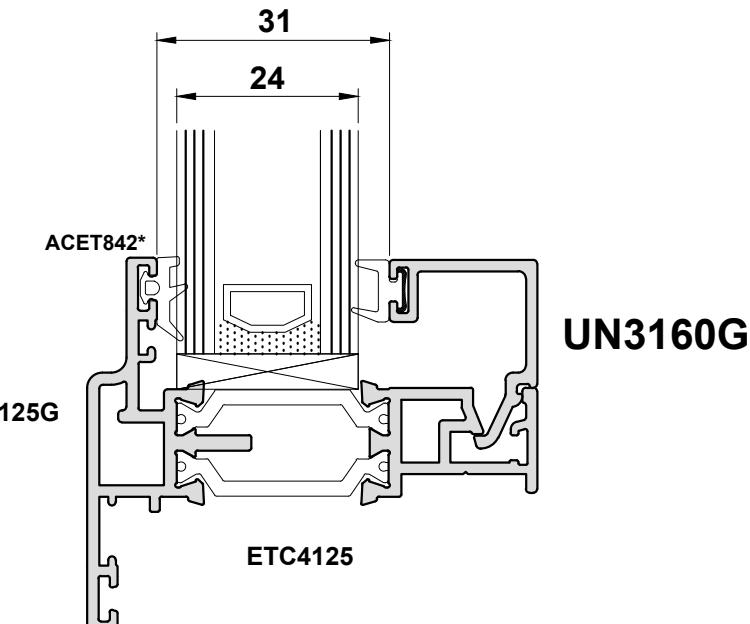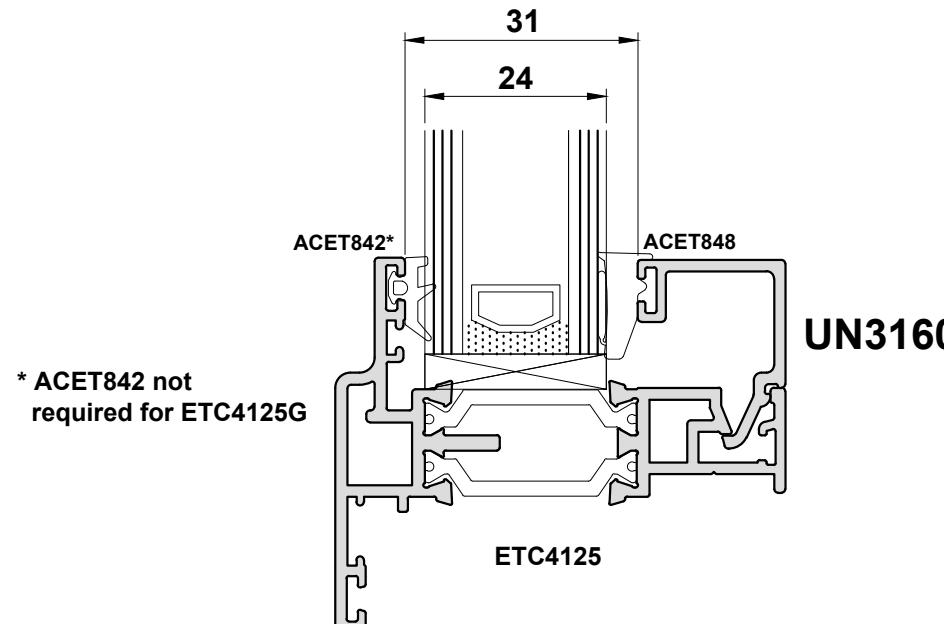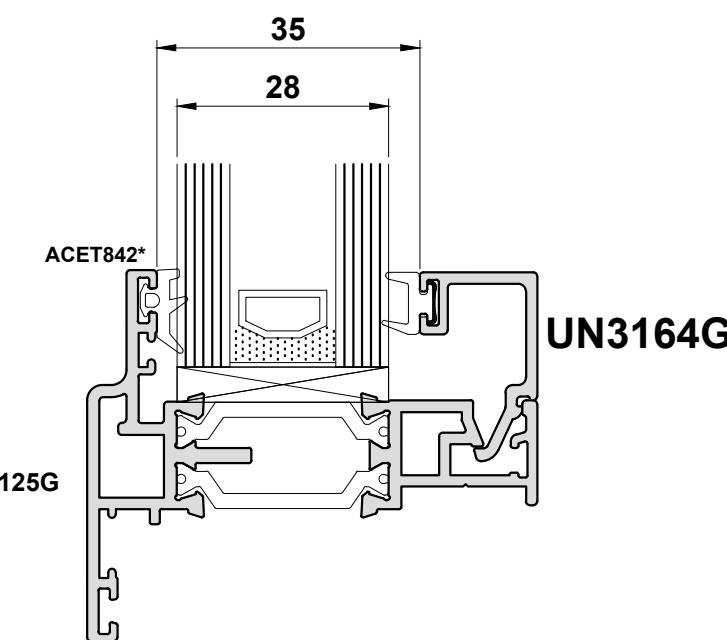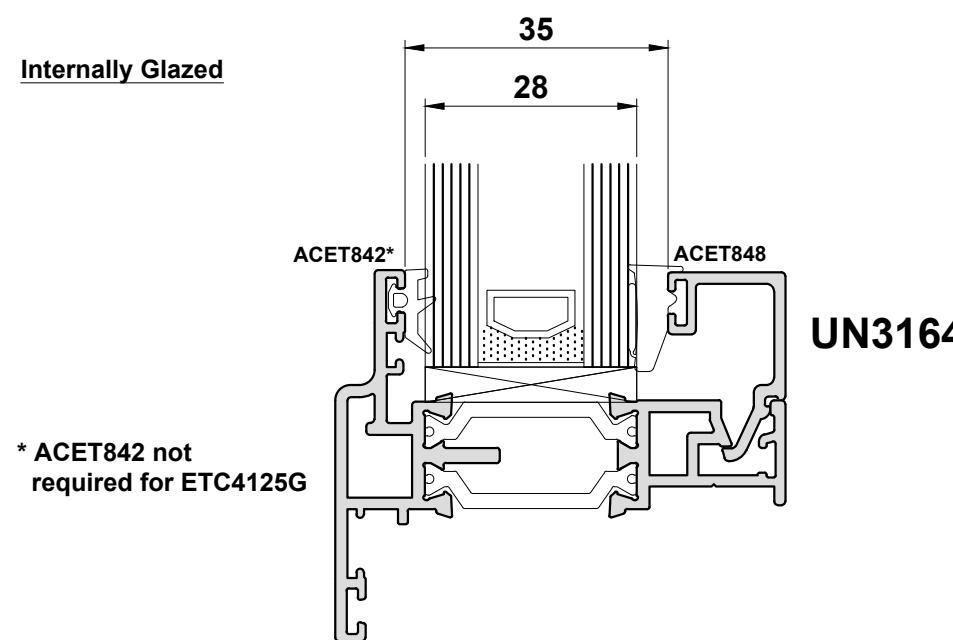Alitherm 400Internally GlazedInternally Glazed**Important Note:**

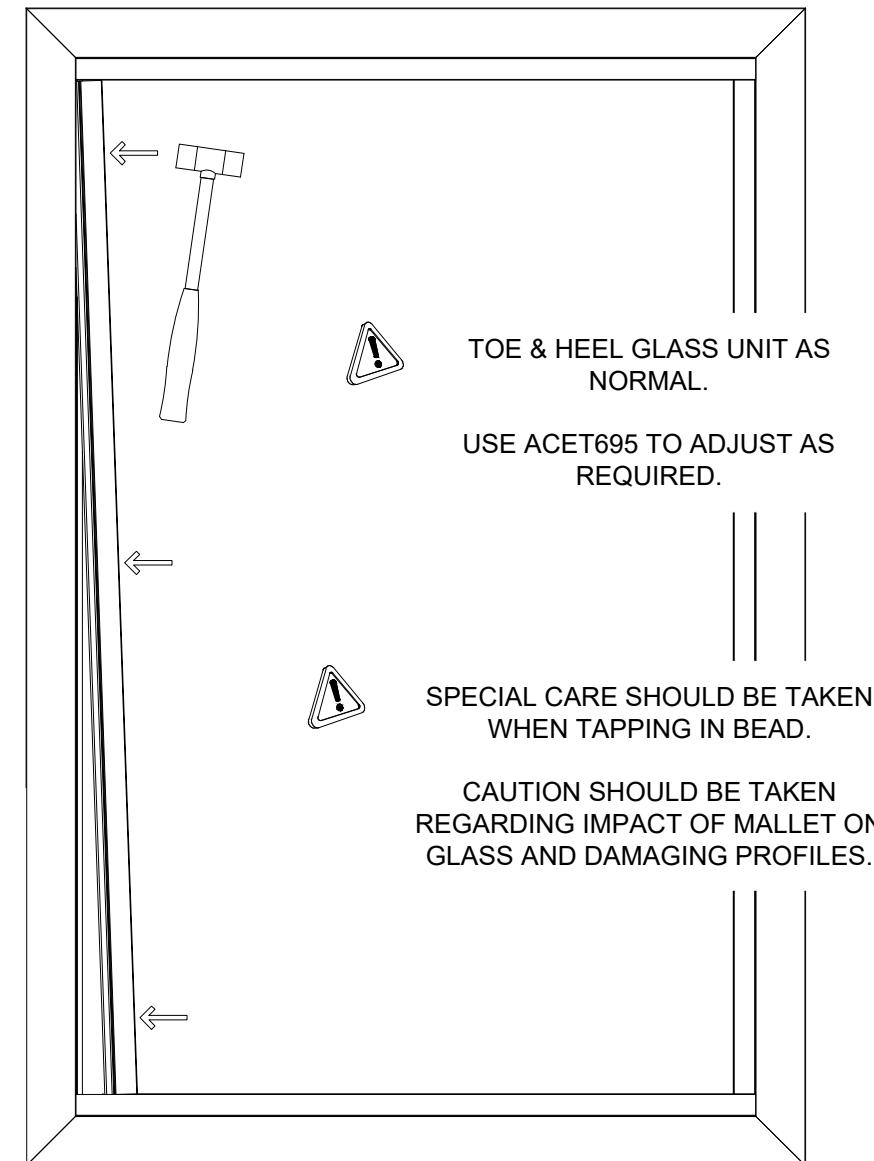
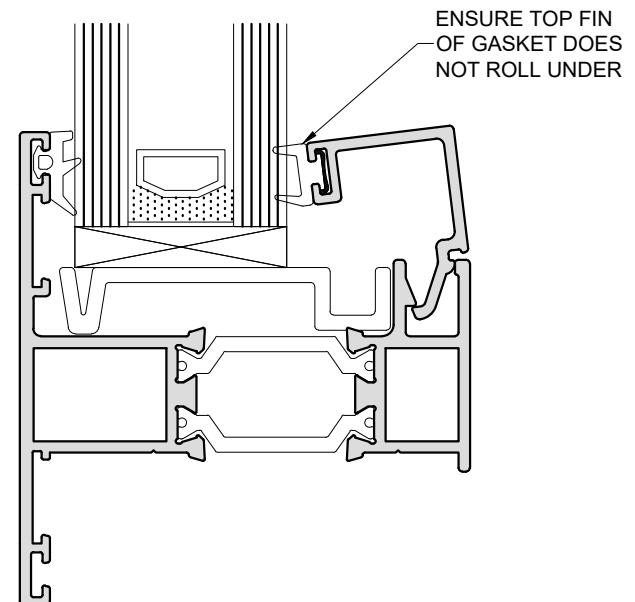
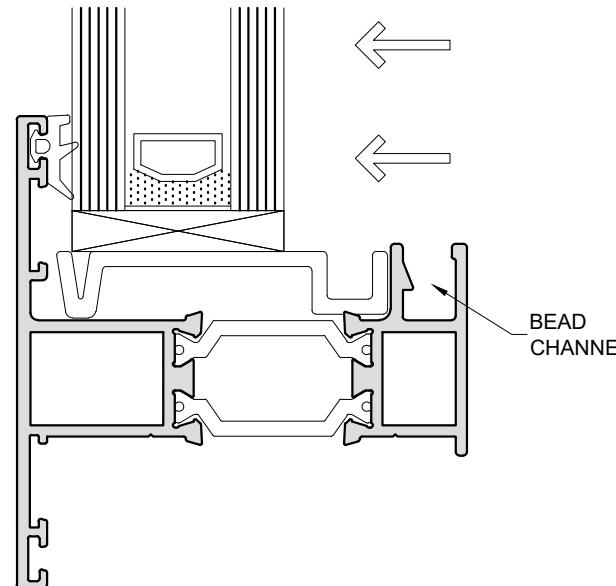
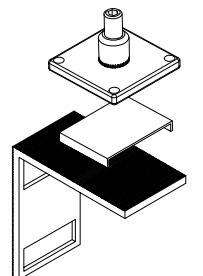
The handle must be fitted through UN3164 bead - see page E22

Quick-Glaze Bead Installation

QUICK-GLAZE BEAD INSTALLATION

1. INSTALL GLASS UNIT, ENSURING IT HAS BEEN PUSHED FORWARD TO ENGAGE COMPRESSION OF E GASKET.
2. BEGINNING WITH HORIZONTAL BEADS, LOCATE BEAD IN CLIP CHANNEL OF SASH AS SHOWN. INTEGRATED GASKET MAY REST AGAINST GLASS UNIT.
3. APPLY FIRM PRESSURE TO THE BEAD TO HOLD IN POSITION. THIS MAY CAUSE THE BEAD TO FULLY LOCK INTO POSITION.
4. USING A NYLON MALLETS, TAP BEAD INTO CHANNEL WORKING FROM ONE END TO THE OTHER. PLEASE TAKE CARE AT THIS STAGE TO AVOID DAMAGE TO BOTH THE GLAZING UNIT AND THE BEAD.
5. REPEAT STEPS 2 - 4 TO INSTALL VERTICAL BEADS.


WE STRONGLY RECOMMEND INSTALLING ACET695 GLASS ADJUSTERS WHEN USING QUICK-GLAZE BEADS. THIS WILL REMOVE THE NEED TO REMOVE BEADS IN ORDER TO ADJUST GLASS POSITION.



Quick-Glaze Bead Removal**KEEP INTEGRATED GASKET****QUICK-GLAZE BEAD REMOVAL**


1. STARTING ON VERTICAL BEADS, APPLY PRESSURE TO BEAD IN DIRECTION SHOWN IN ORDER TO CREATE SMALL GAP BETWEEN SASH AND BEAD.
2. GENTLY INSERT DE-GLAZING TOOL TAKING PARTICULAR CARE AS NOT TO DAMAGE PAINT FINISH.
3. SLOWLY PRISE THE BEAD UP AND AWAY FROM THE SASH.
4. THE BEAD SHOULD NOW BE EASILY REMOVABLE FROM QUICK-GLAZE BEAD CHANNEL IN SASH

BEAD AND INTEGRATED GASKET CAN BE REUSED.



**REPLACE INTEGRATED GASKET****QUICK-GLAZE BEAD REMOVAL**

1. USING SMALL FLAT HEADED SCREWDRIVER OR SIMILAR, WEDGE TIP BETWEEN CO EXTRUDED GASKET AND ALUMINIUM.
2. IN A LEVERING MOTION, PRISE THE GASKET AWAY FROM THE ALUMINIUM. PARTICULAR CARE SHOULD BE TAKEN NOT TO DAMAGE THE GLASS UNIT AND ALUMINIUM.
3. COMPLETE THIS AT SEVERAL LOCATIONS ALONG THE LENGTH OF THE BEAD.
4. REMOVE GASKET AND DISCARD. THIS GASKET CAN NO LONGER BE USED.
5. THE BEAD SHOULD NOW BE EASILY REMOVABLE FROM TAP IN BEAD CHANNEL IN SASH

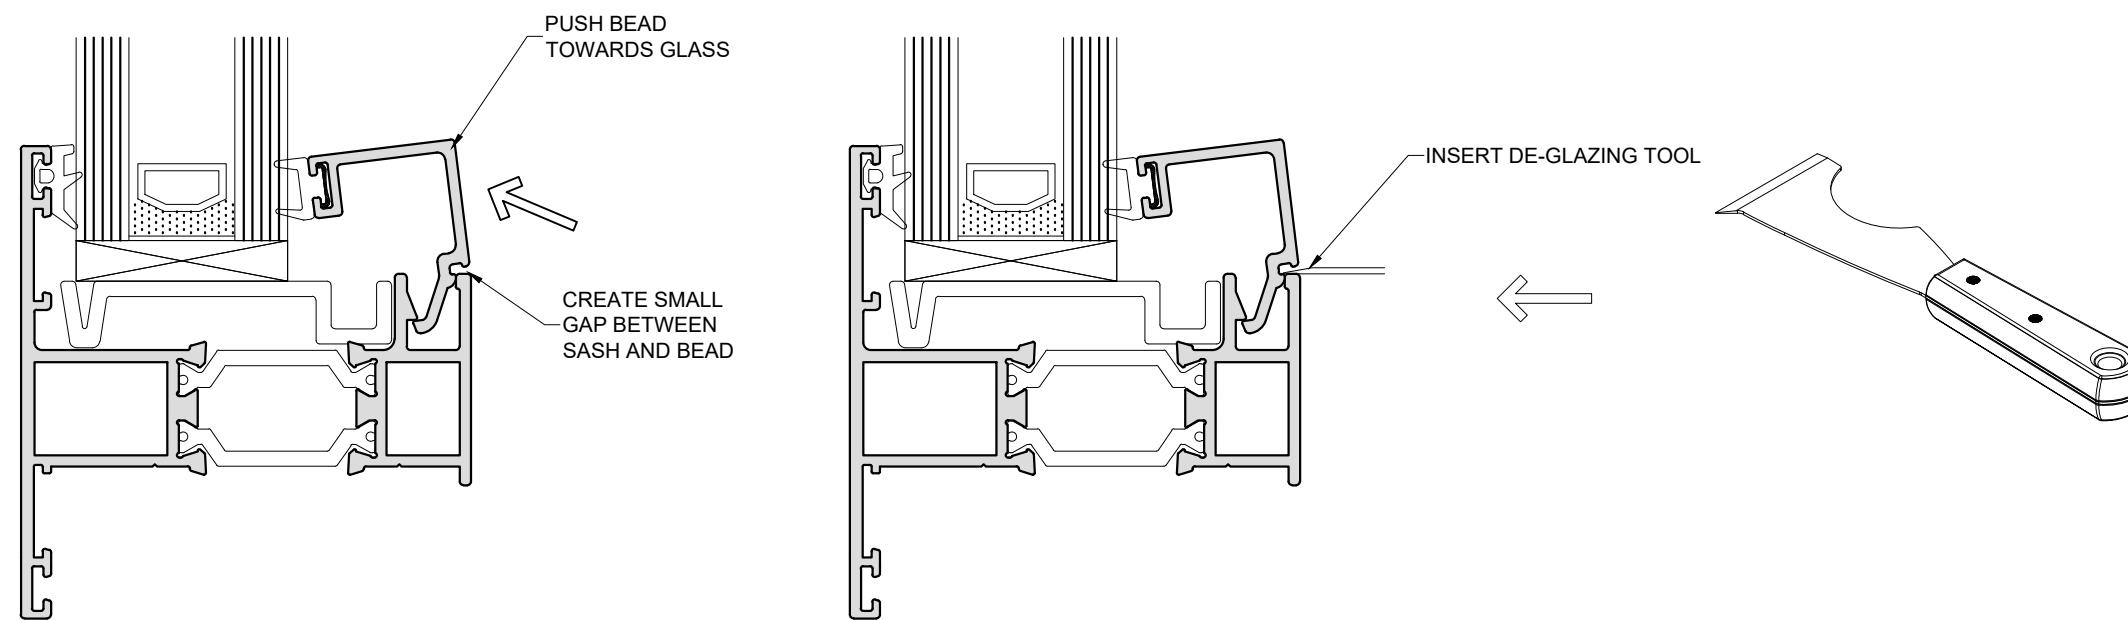
PLEASE SEE GLAZING CHART FOR REPLACEMENT GASKET CODES.



Quick-Glaze Bead Glass Adjuster

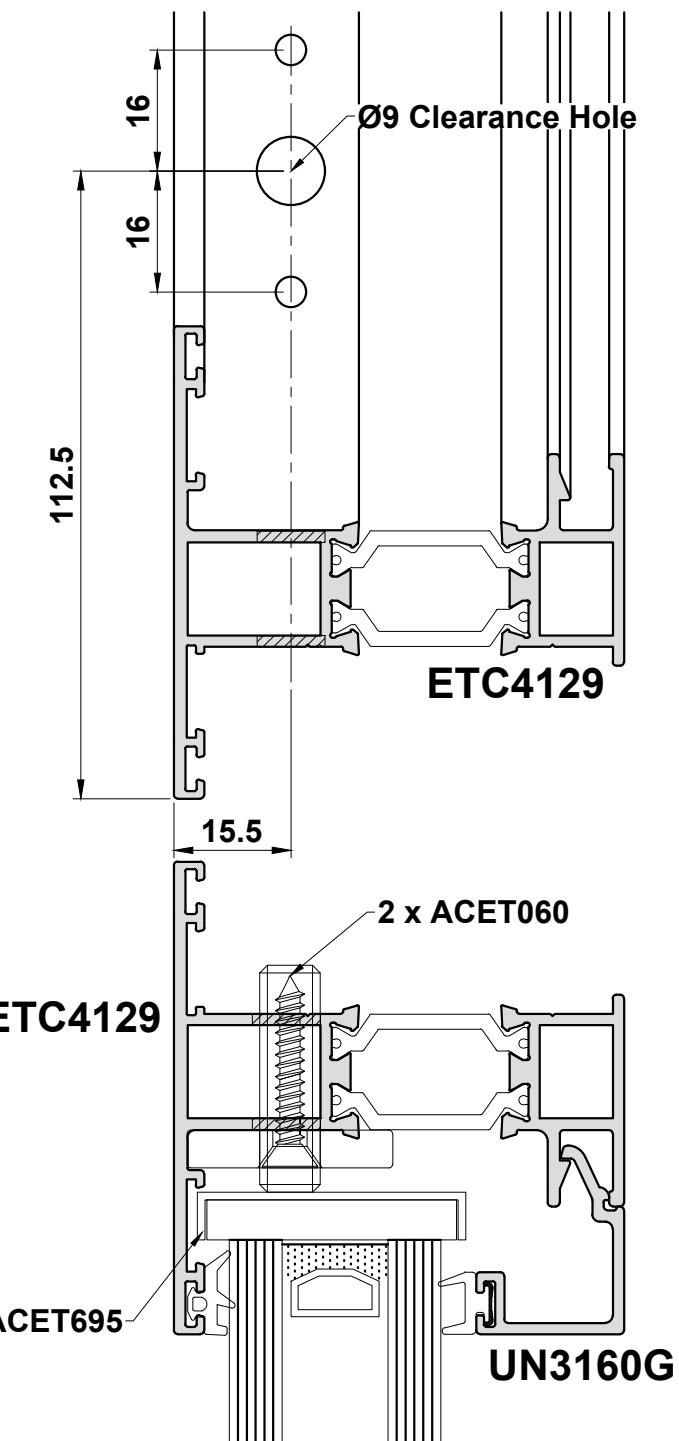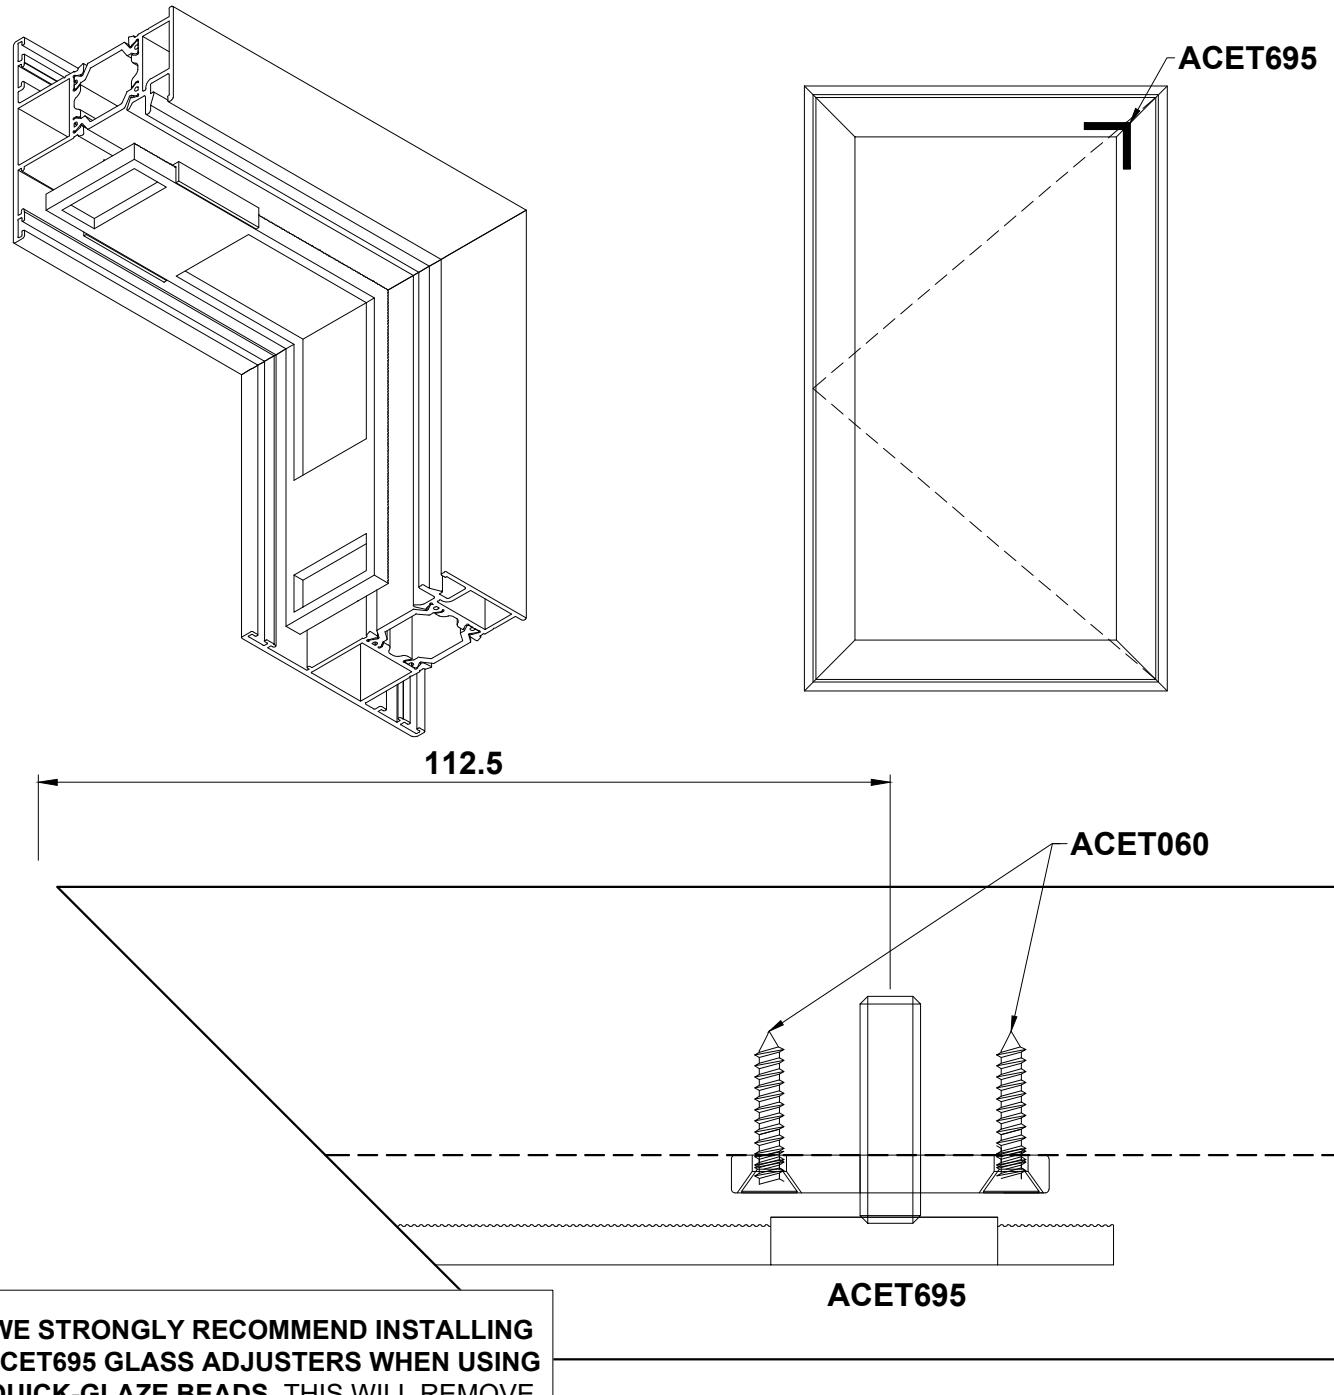


ACET695 Kit Includes:

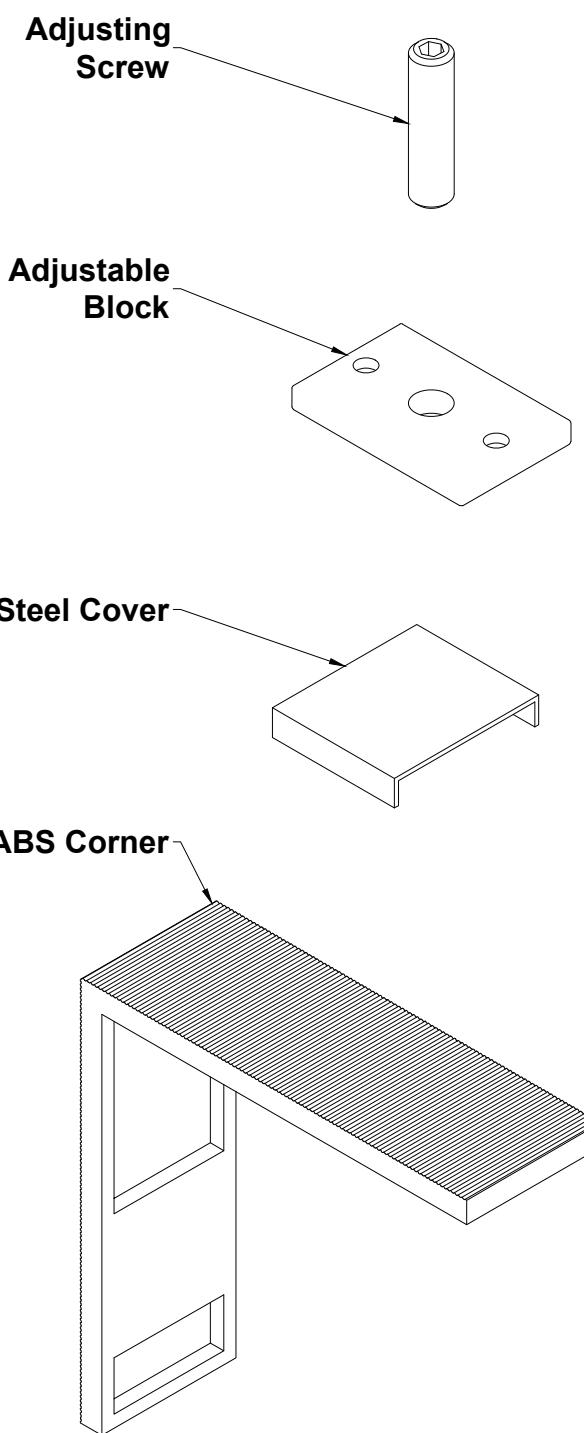

Fixed Bay Pole Angle / Deduction

Sections

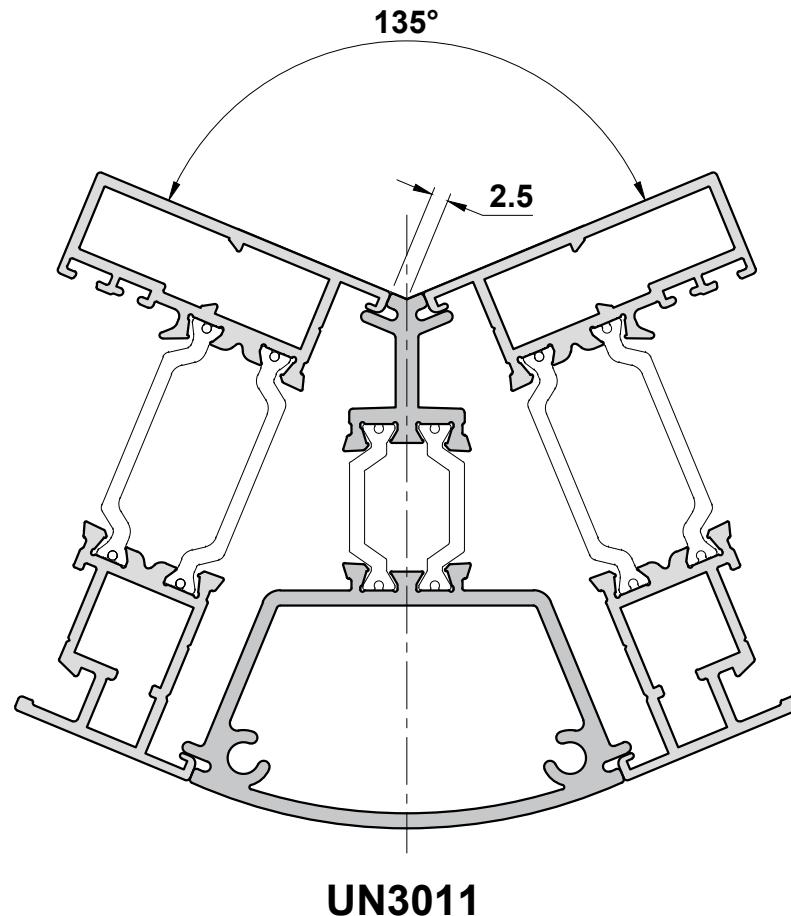ETC4110
ETC4111
ETC4112
ETC4115




Sections

ETC4110
ETC4111
ETC4112
ETC4115



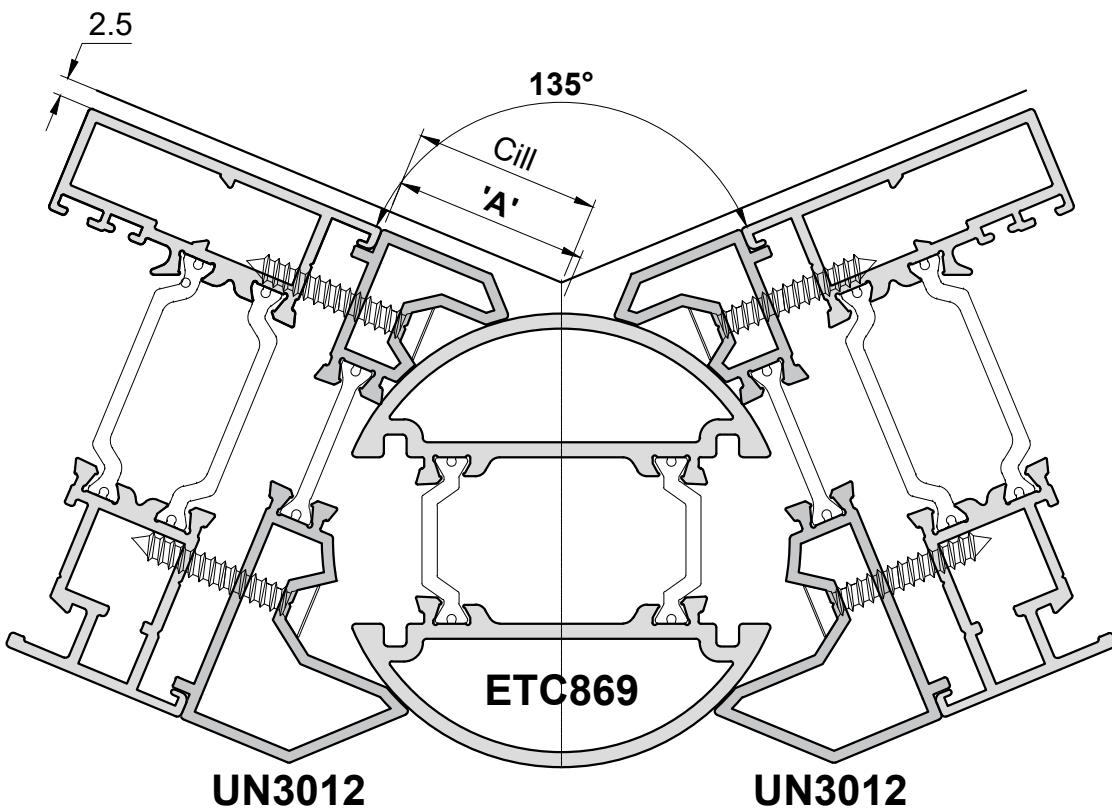
Important Note:
All joints must be adequately sealed using ACSIL04



ANGLE	DEDUCTION 'A'	INT. CILL DEDUCTION
180°	37.5	37.5
175°	36	36
170°	35	35
165°	33.5	33.5
160°	32.5	32
155°	31	30.5
150°	30	29
145°	28.5	27.5
140°	27	26
135°	25.5	24.5


'A' & Cill deductions are the same at angles 180°-165°

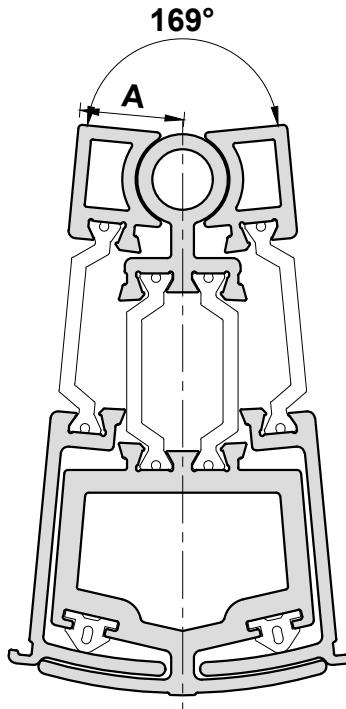70mm Outer Frame Bay Pole Angles/Deductions




ACSI04
ACSI08



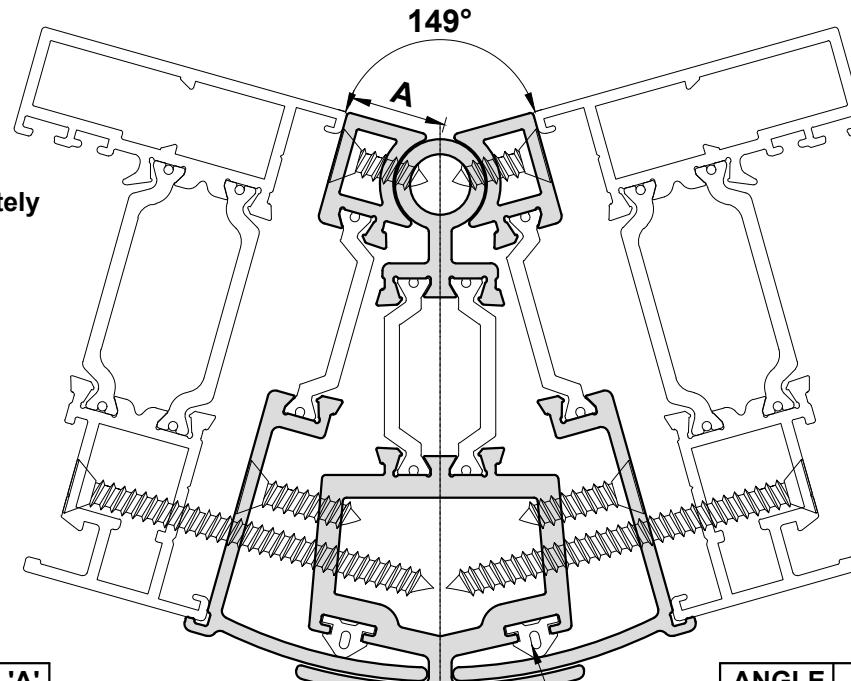
Important Note:
All joints must be adequately sealed using ACSI04



ANGLE	DEDUCTION 'A'
149°	12.5
145°	12.5
140°	12
135°	12
130°	11.5

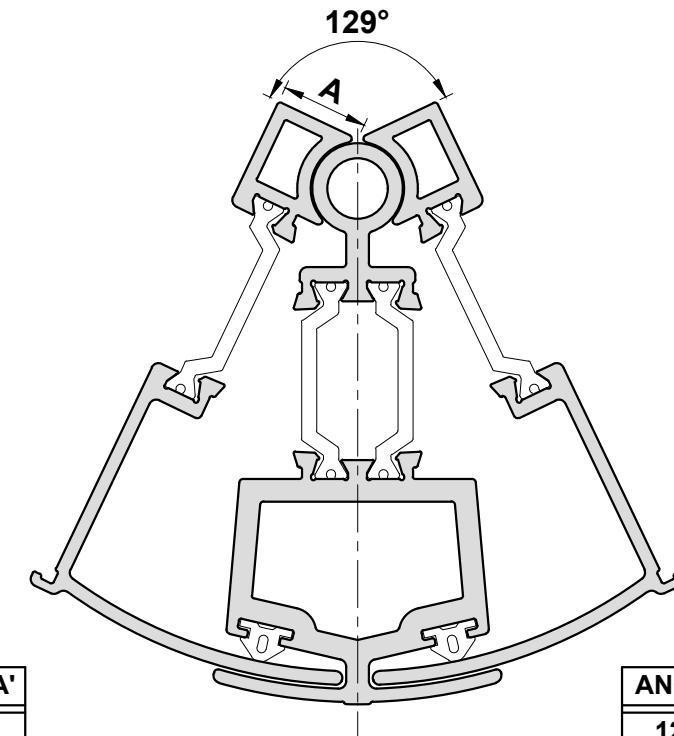

ANGLE	DEDUCTION 'A'
129°	11.5
125°	11.5
120°	11
115°	10.5

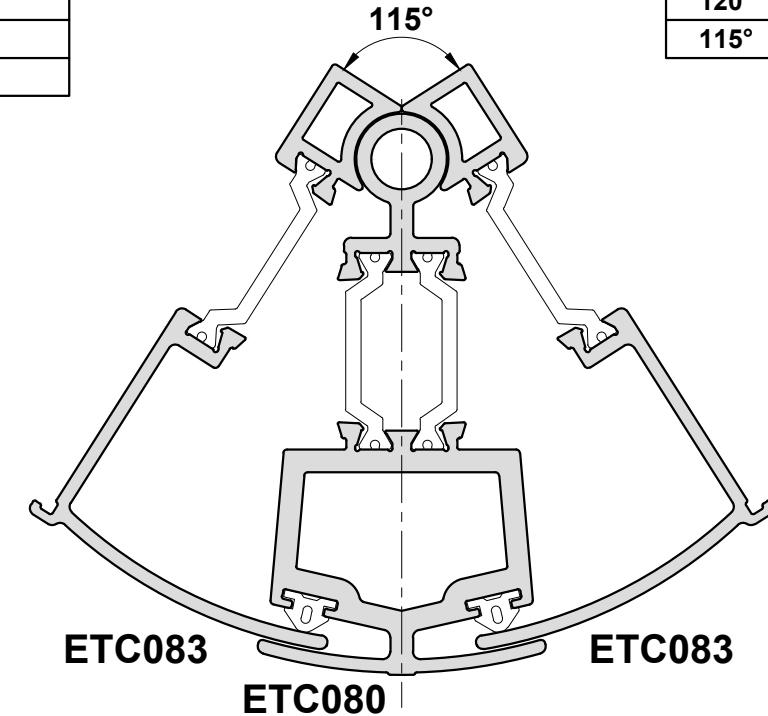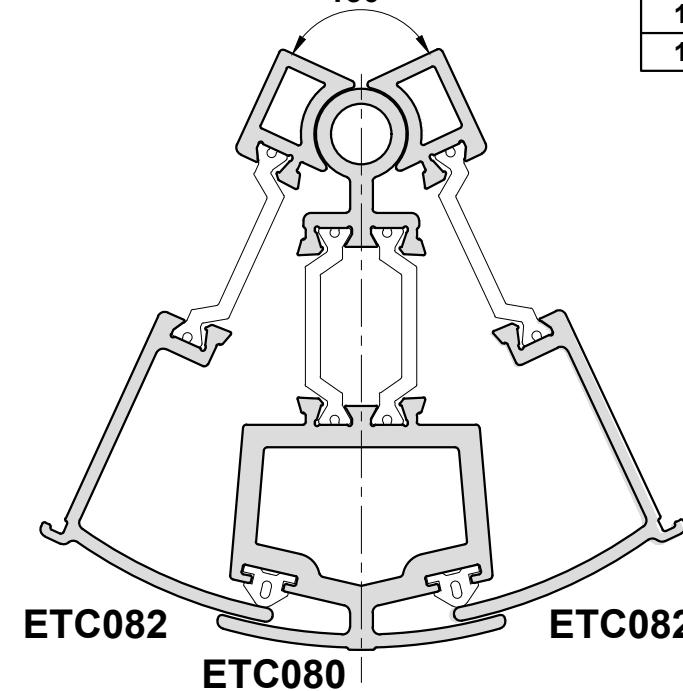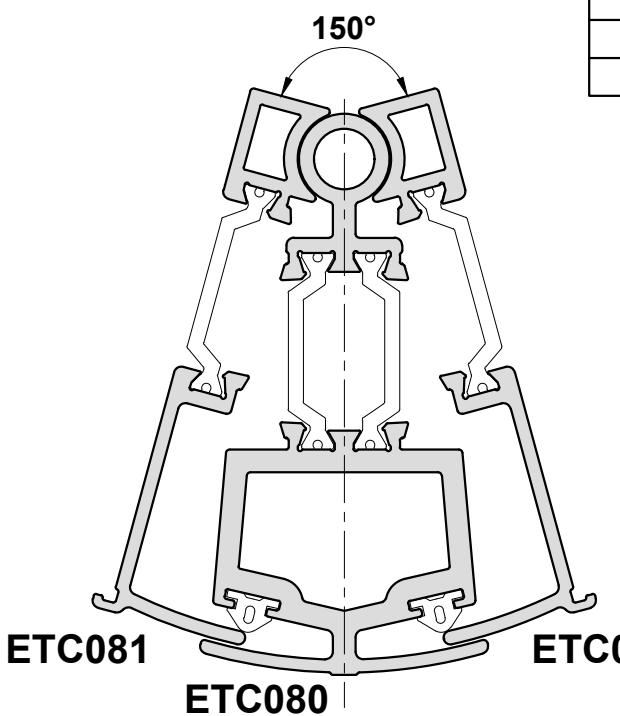




Alitherm 400

90° Jackable Bay Pole

Note: Installation to comply with relevant building regulations and British standards :-


- BS8213-4 Code of Practice for the survey and installation of window and external doorsets.
- Approved document A structure.
- Approved document C resistance to the passage of moisture.

Height (mm)	Load Bearing
1000	Capped at 2 Tonnes
1250	1.5 Tonnes
1500	1.1 Tonnes
1750	0.8 Tonnes
2000	0.6 Tonnes
2250	0.5 Tonnes
2500	0.4 Tonnes

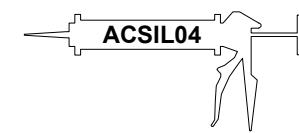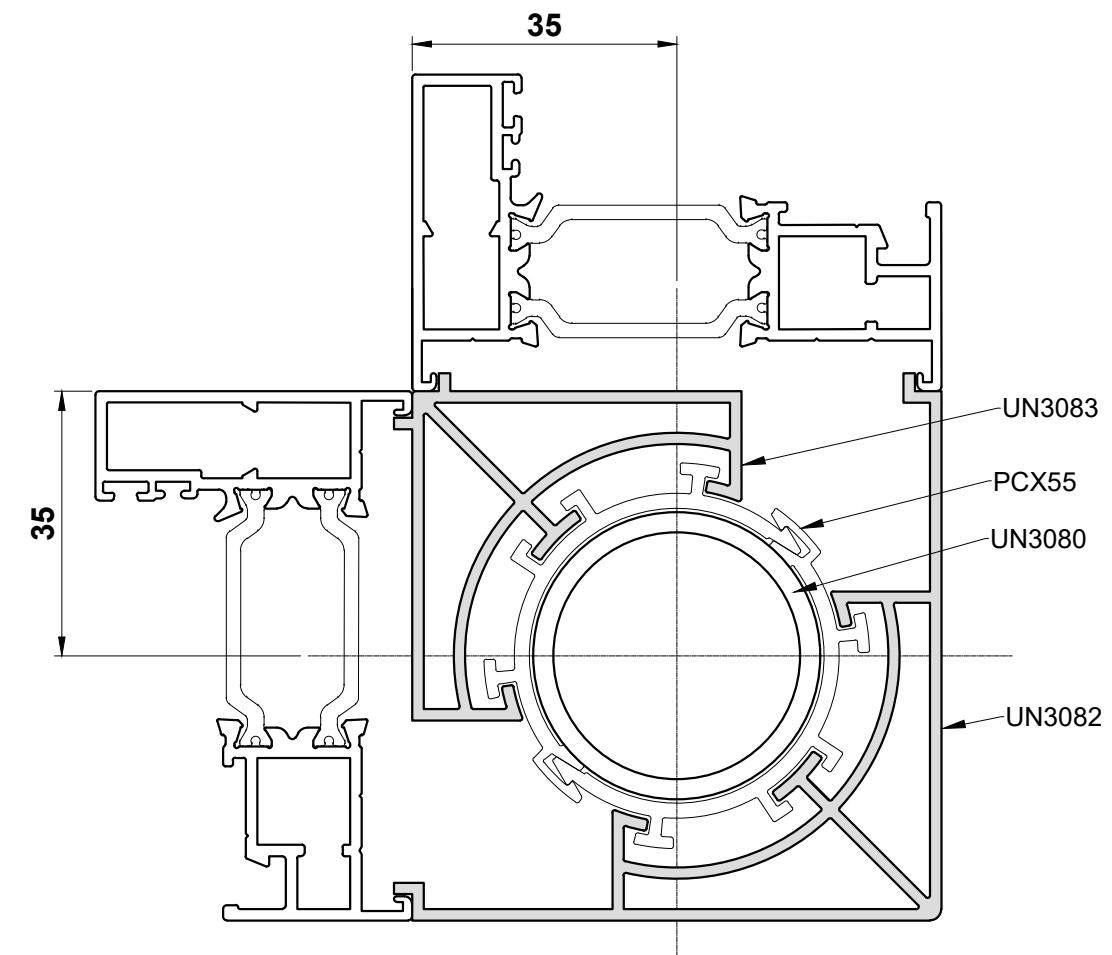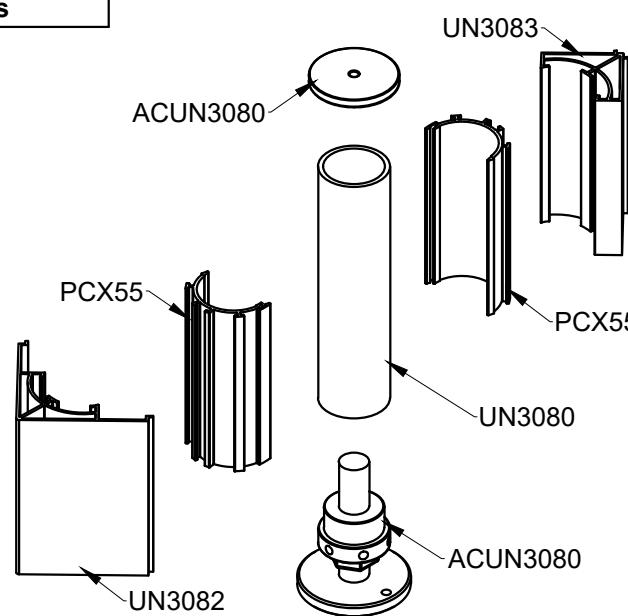


Important Note:
All joints must be adequately sealed using ACSIL04

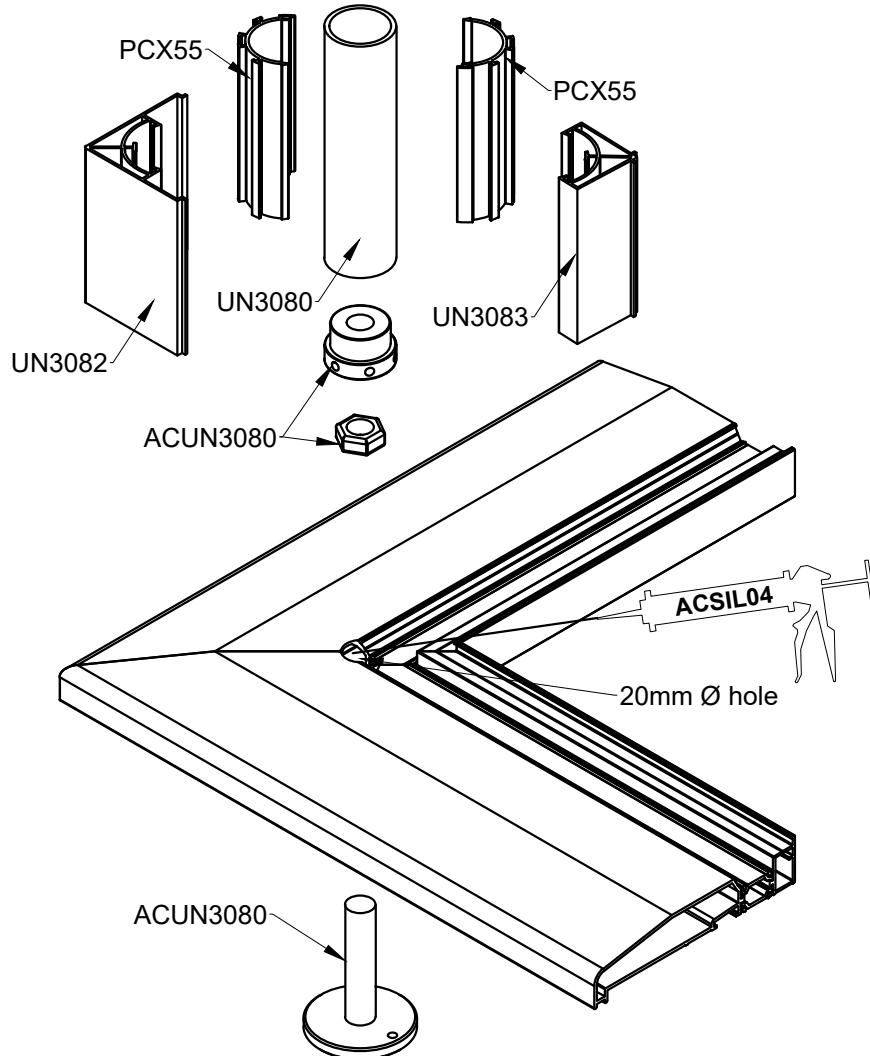90° Jackable Bay Pole



Note: Installation to comply with relevant building regulations and British standards :-

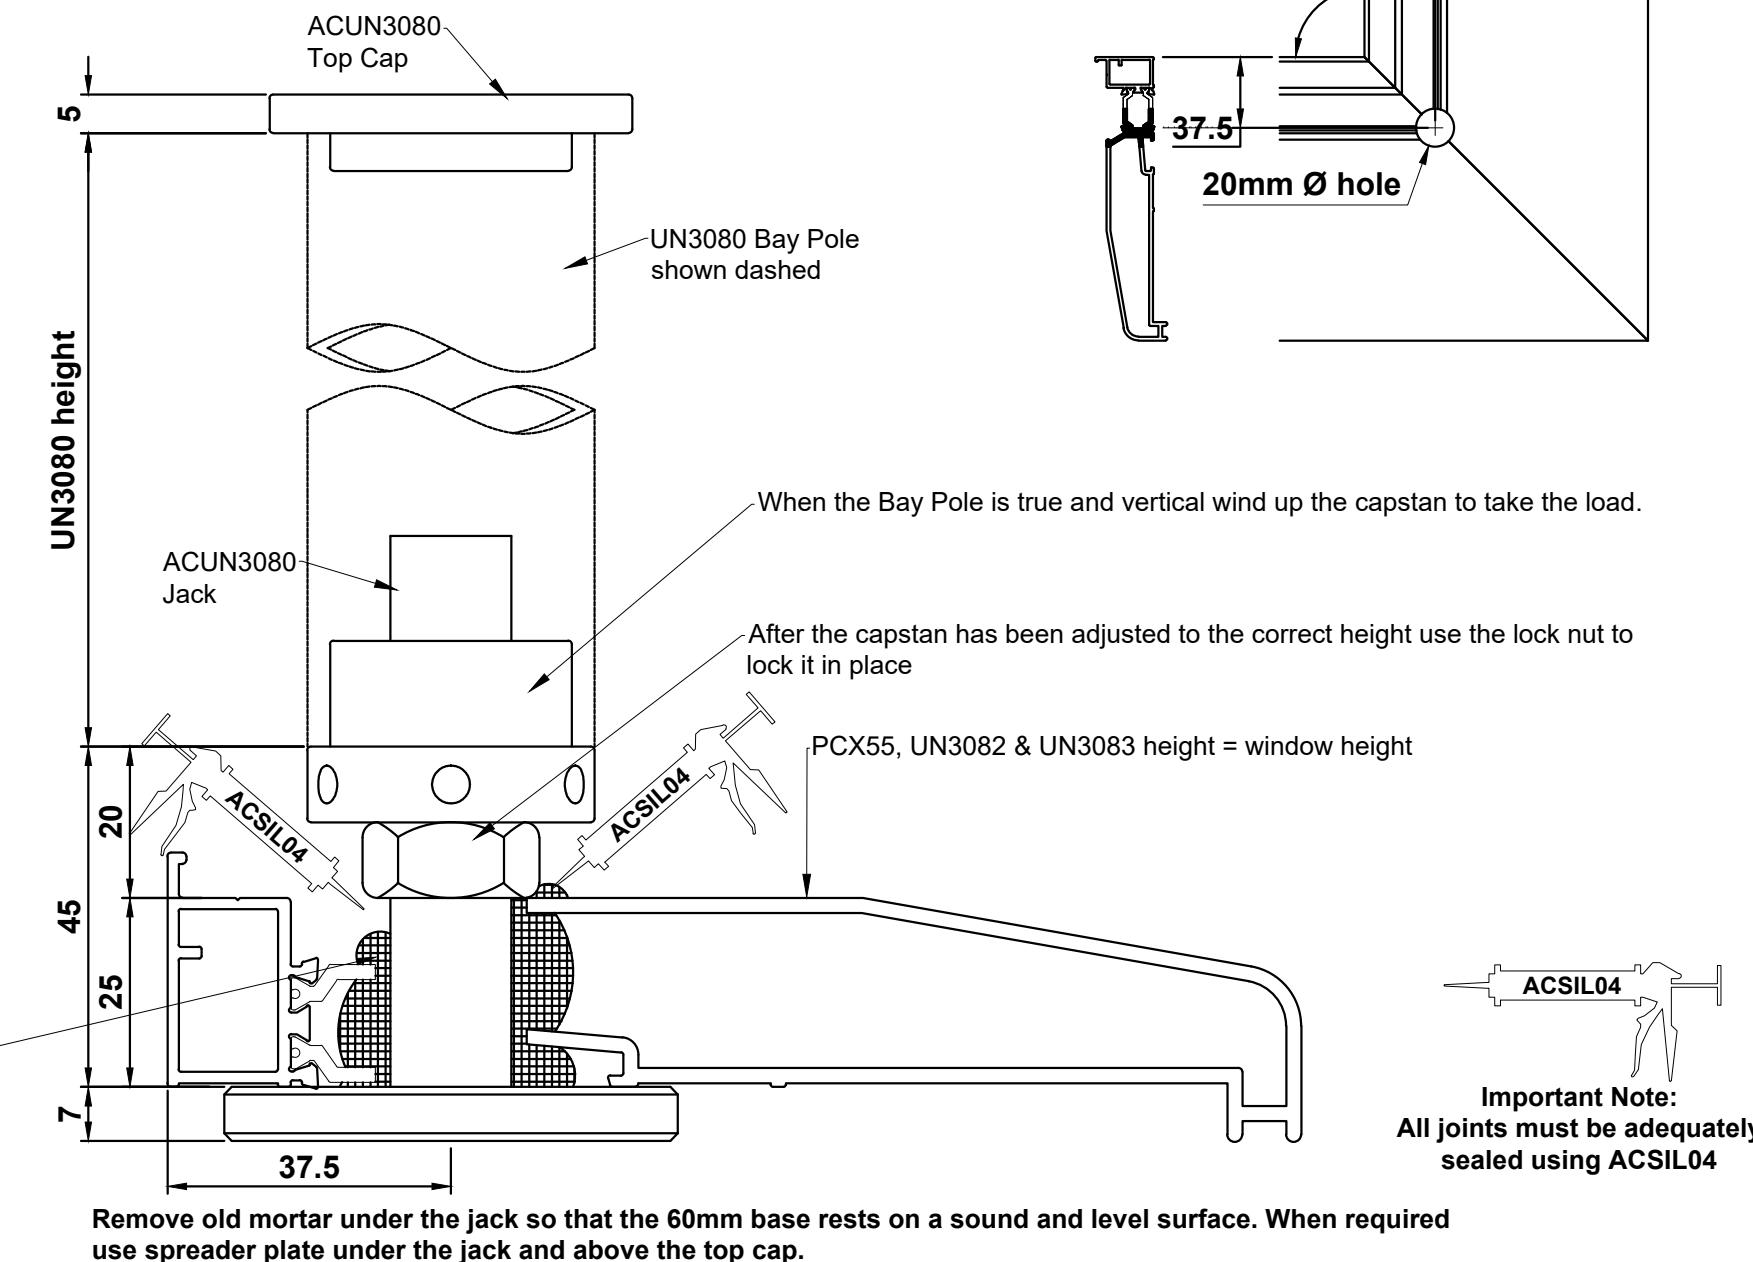- BS8213-4 Code of Practice for the survey and installation of window and external doorsets.
- Approved document A structure.
- Approved document C resistance to the passage of moisture.



When the cill does not form a complete water barrier then damp proof course should be used.
See approved document C section 5.9




Alitherm 400

Variable Angle Jackable Bay Pole

Note: Installation to comply with relevant building regulations and British standards :-

- BS8213-4 Code of Practice for the survey and installation of window and external doorssets.
- Approved document A structure.
- Approved document C resistance to the passage of moisture.


Height (mm)	Load Bearing
1000	Capped at 2 Tonnes
1250	1.5 Tonnes
1500	1.1 Tonnes
1750	0.8 Tonnes
2000	0.6 Tonnes
2250	0.5 Tonnes
2500	0.4 Tonnes

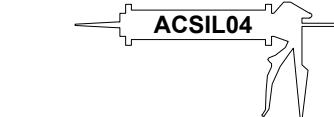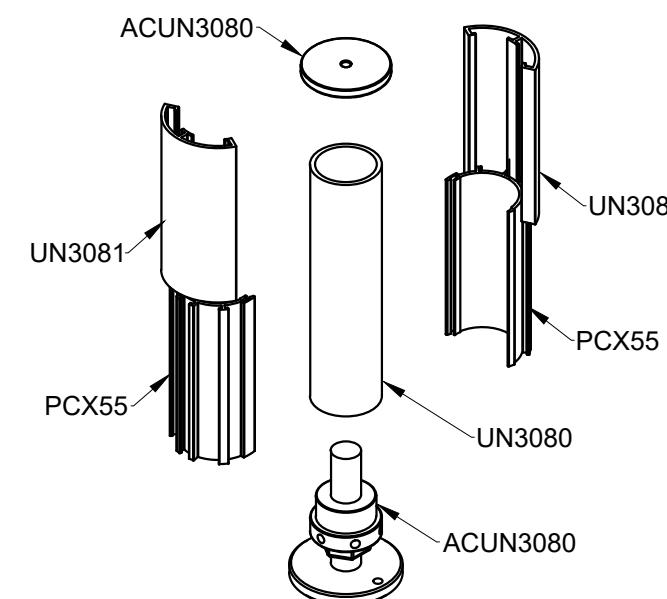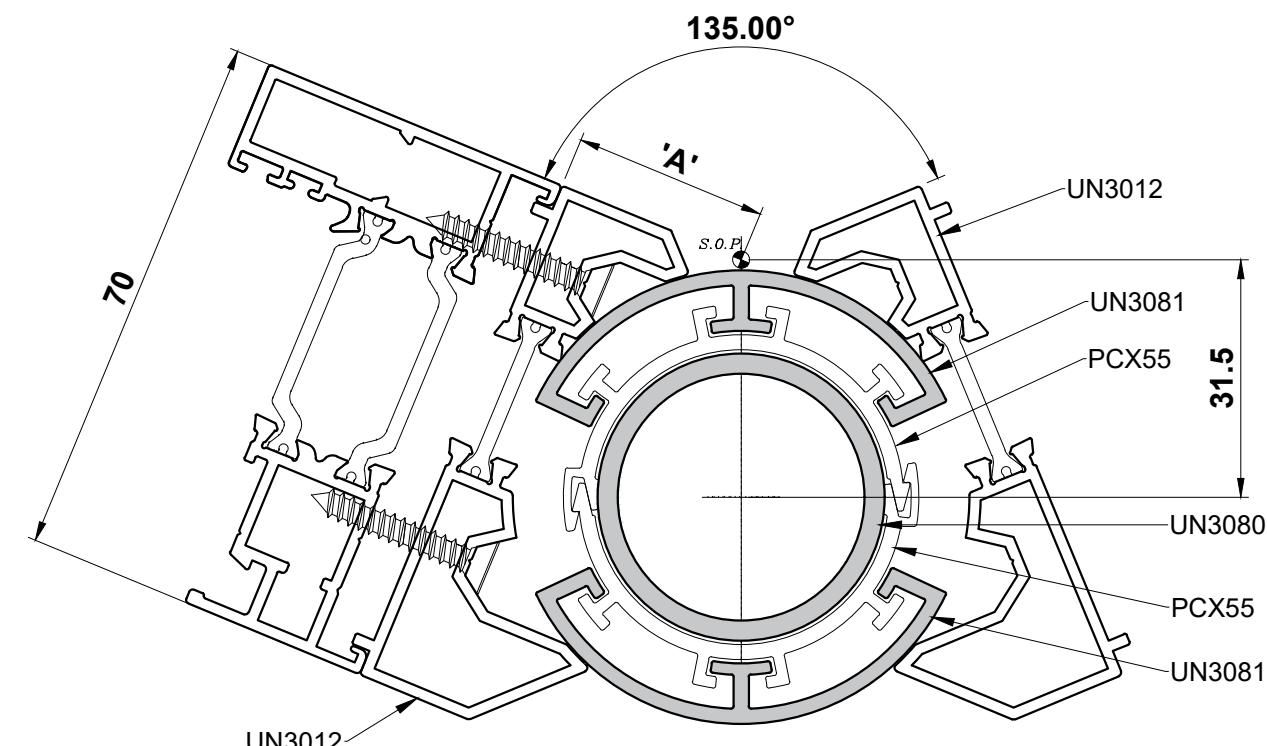

Important Note:
All joints must be adequately sealed using ACSIL04

ANGLE	DEDUCTION 'A'
180°	37.5
175°	36
170°	35
165°	33.5
160°	32.5
155°	31
150°	30
145°	28.5
140°	27
135°	25.5

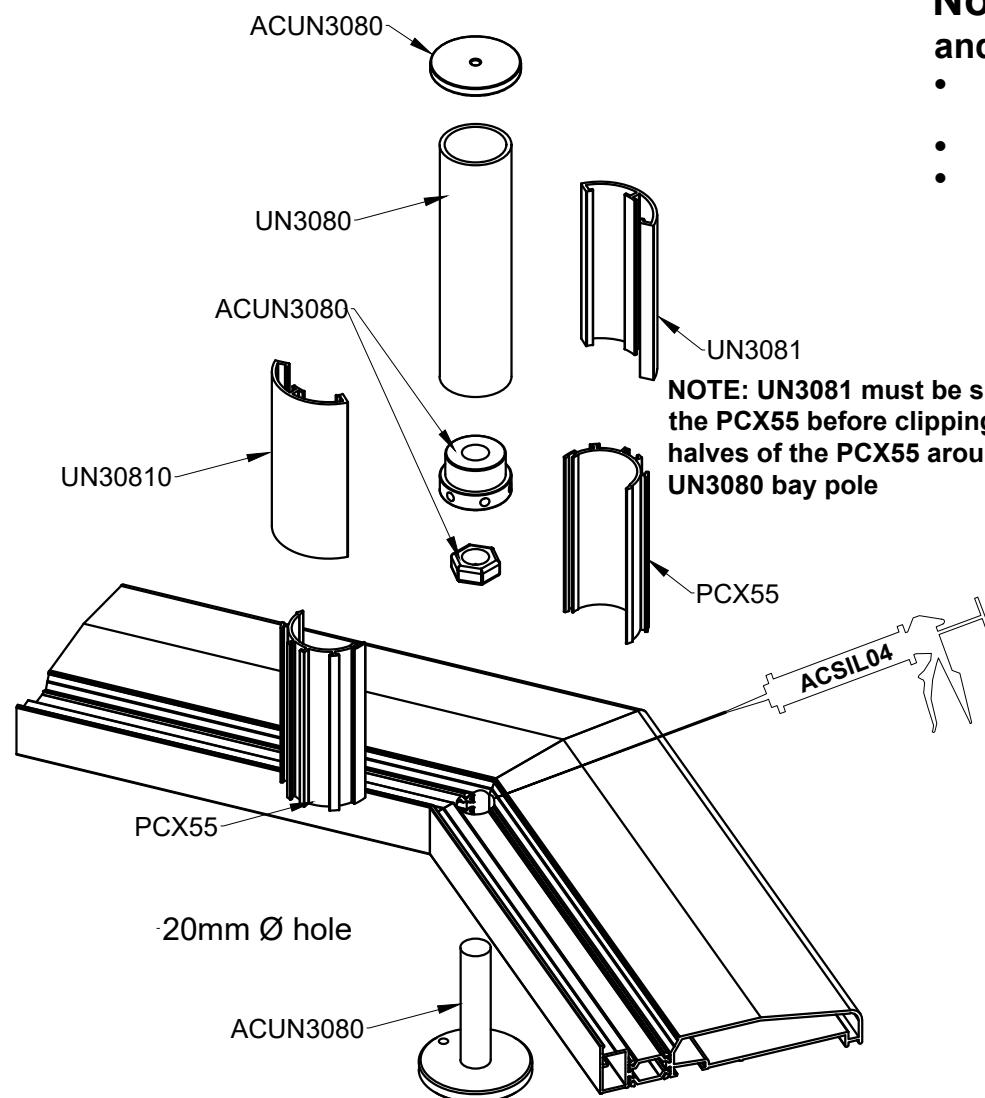Variable Angle Jackable Bay Pole




Fully seal between the jack and sub cill with ACSIL04 so that water is not able to track through the 20mm hole.

When the cill does not form a complete water barrier then damp proof course should be used.
See approved document C section 5.9


Note: Installation to comply with relevant building regulations and British standards :-

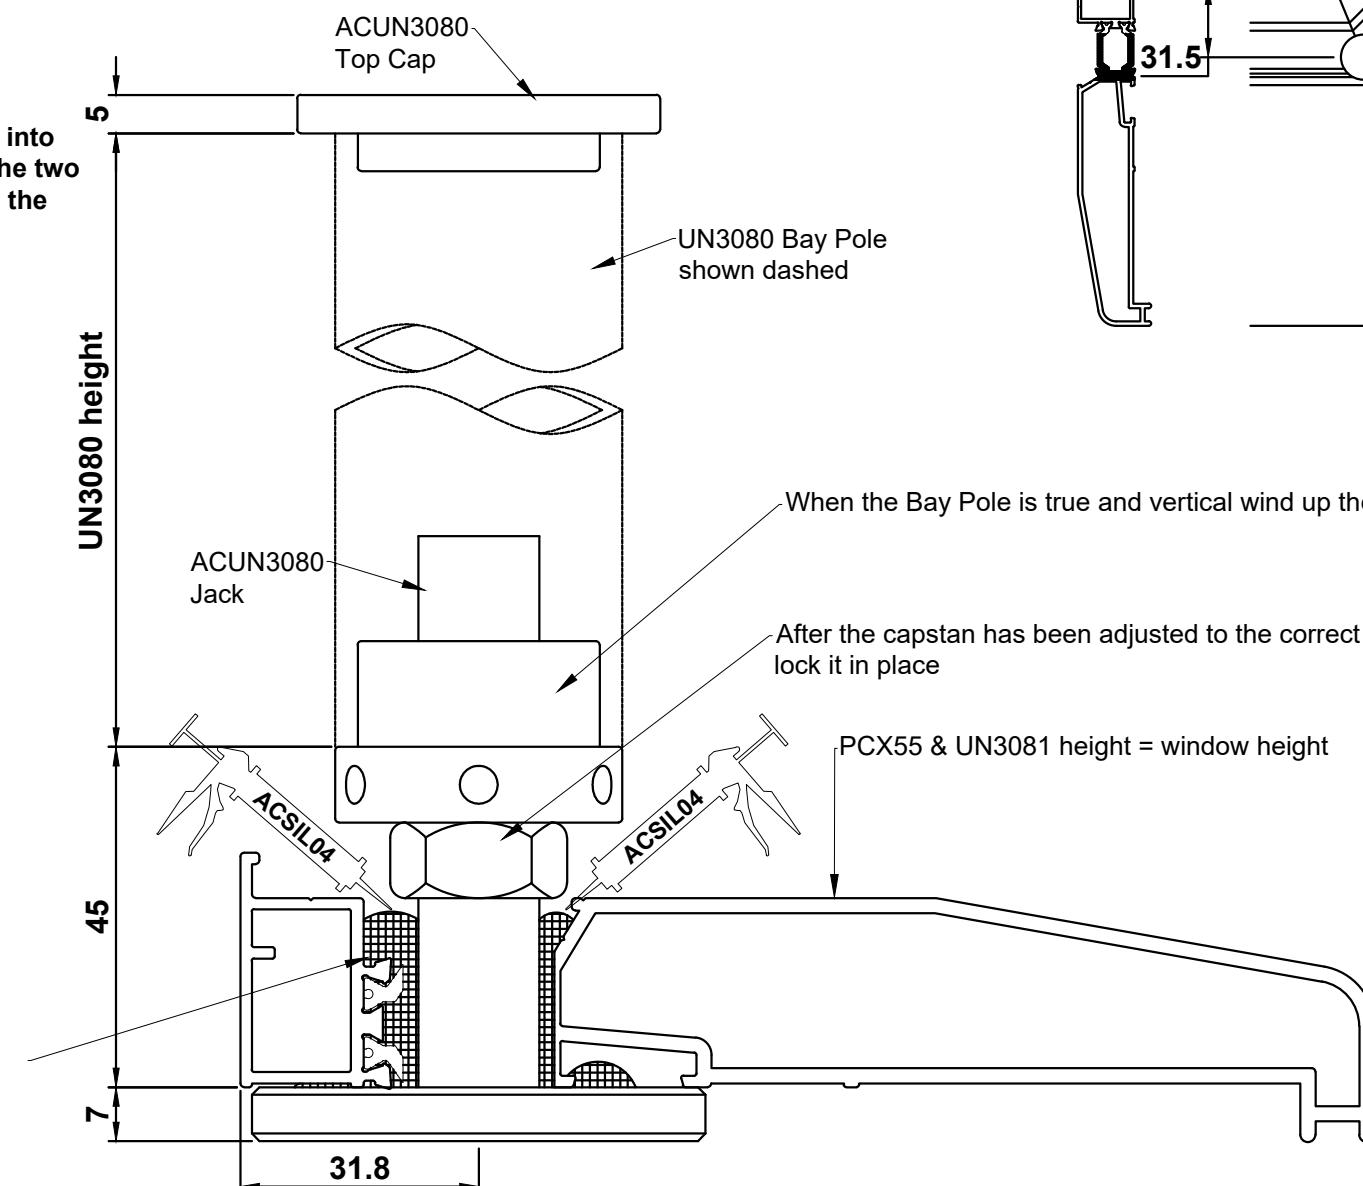- BS8213-4 Code of Practice for the survey and installation of window and external doorsets.
- Approved document A structure.
- Approved document C resistance to the passage of moisture.




Important Note:
All joints must be adequately sealed using ACSIL04

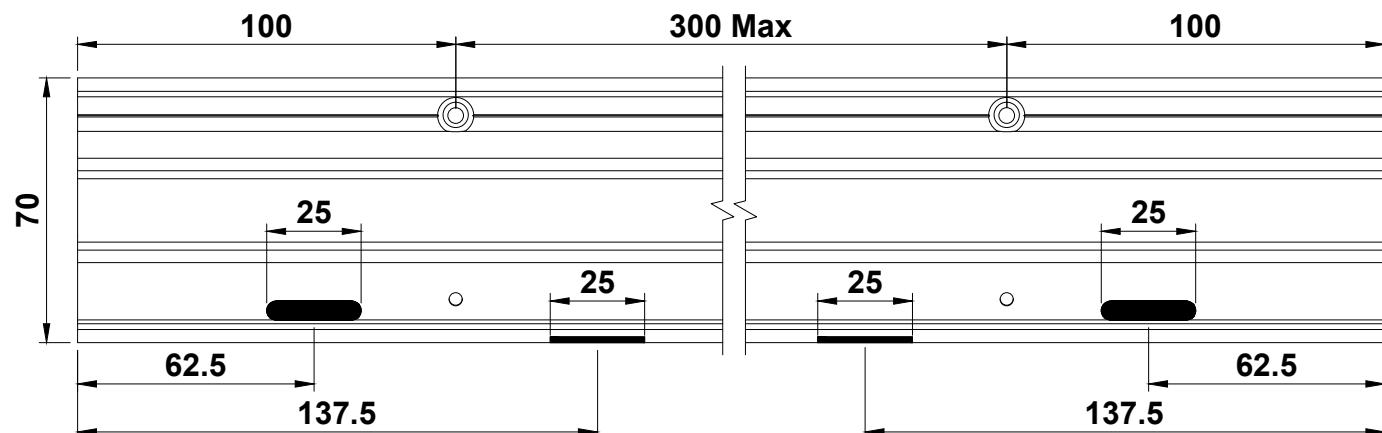
Alitherm 400



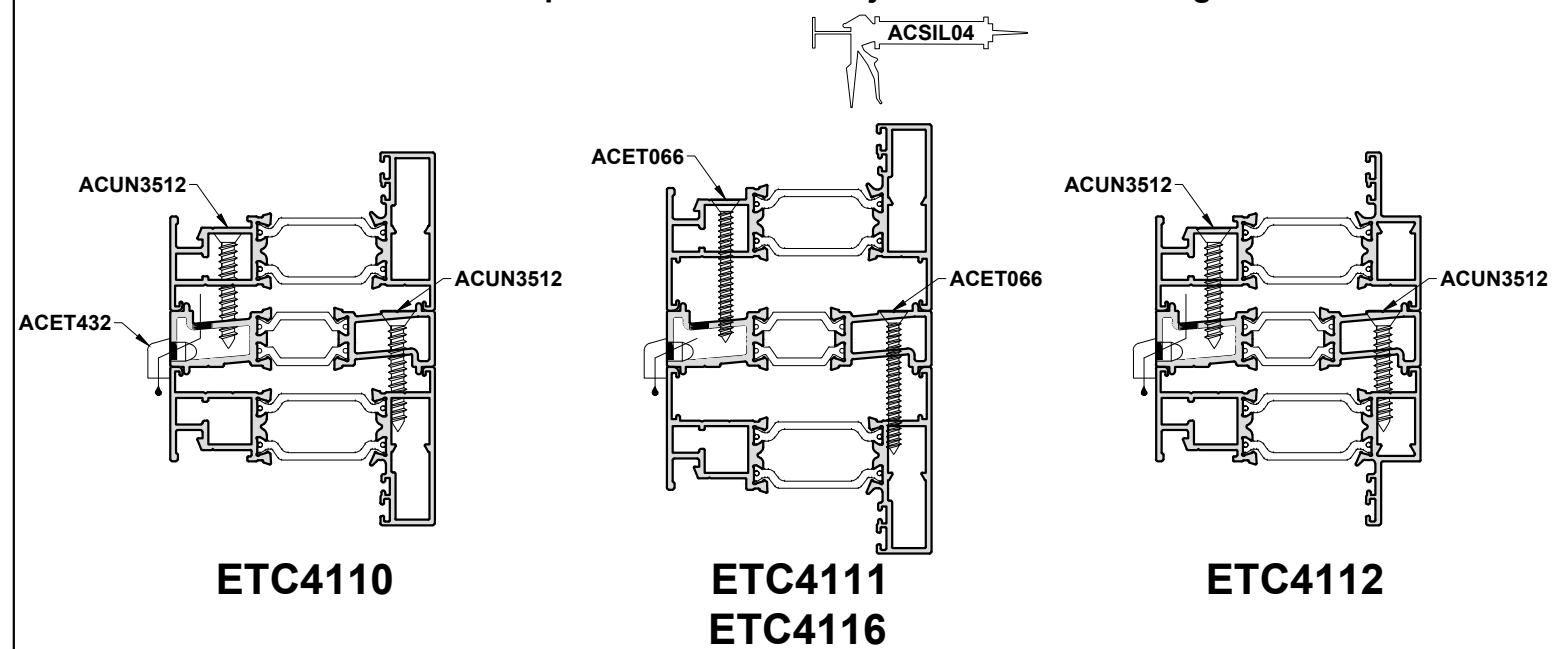Important Note: Seal all joints to UN3000 using ACSIL04.







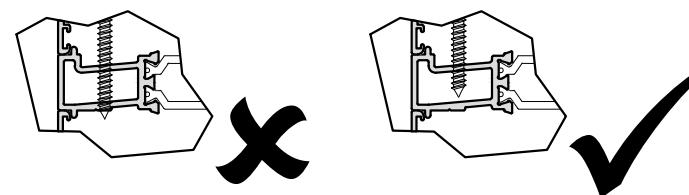Important Note: Do not screw through drainage channel.




Zone Drainage of Jamb Cavity

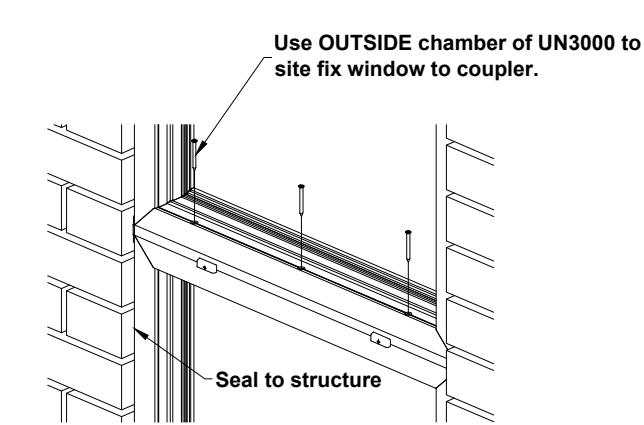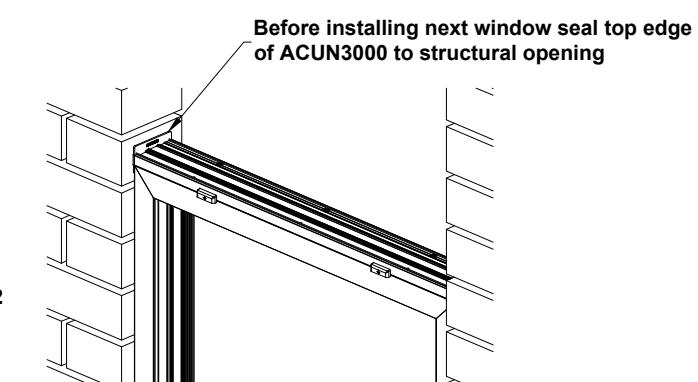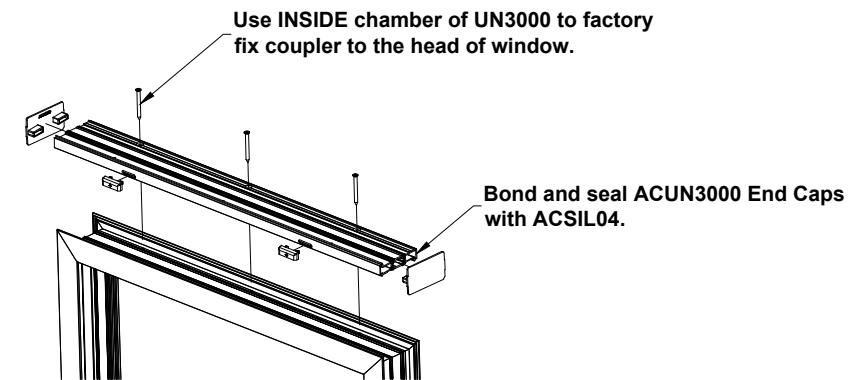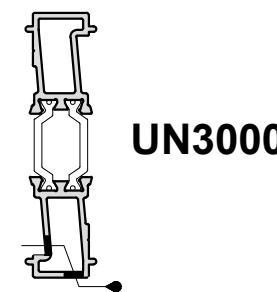CWCT Built up wall guidance recommends drainage of Jamb Cavity




Fixing Strap Details

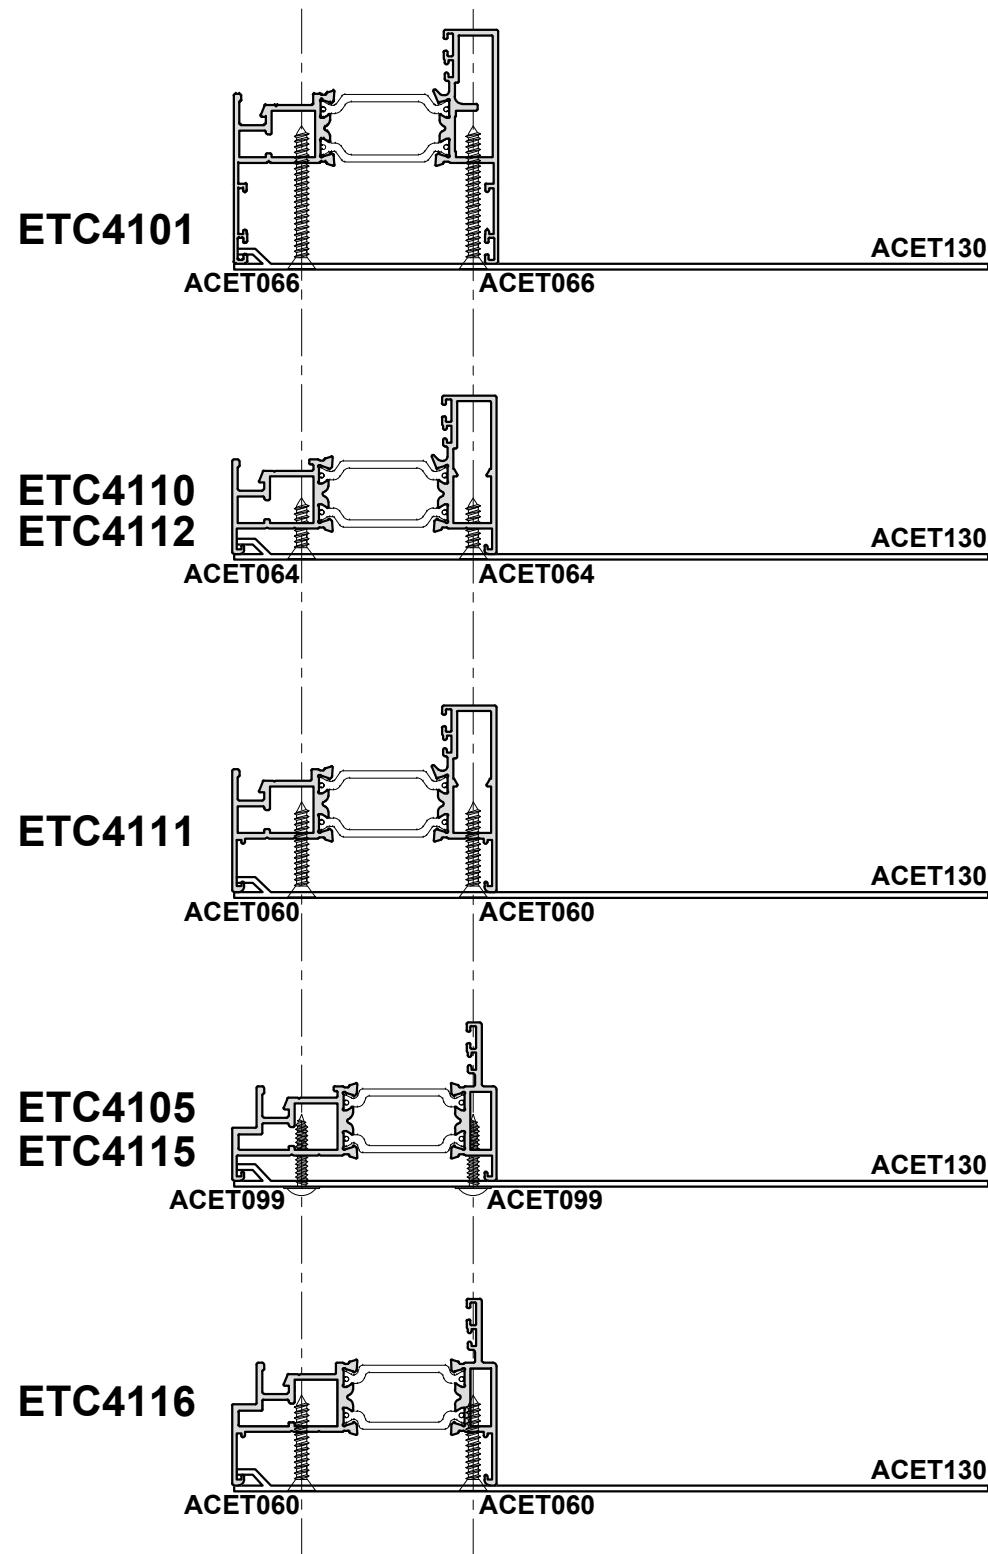


NOTE:

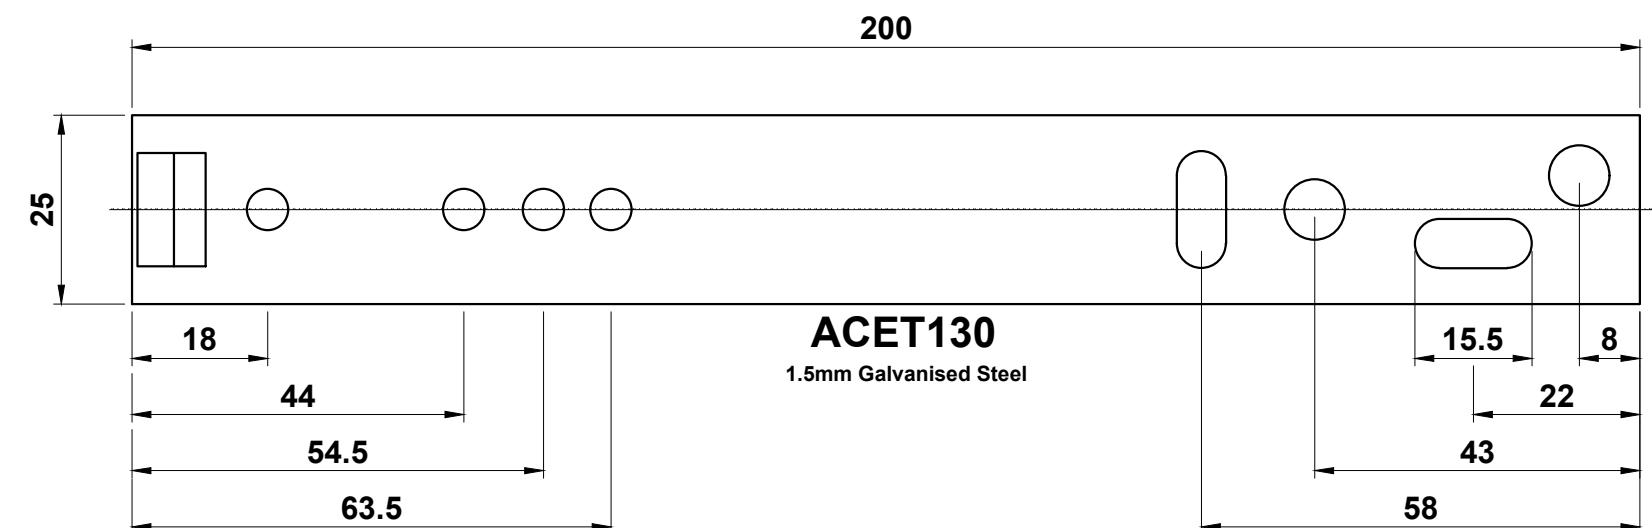Fixing straps should be spaced a minimum of 150mm in from each end & at a maximum of 300mm apart.





Alitherm 400

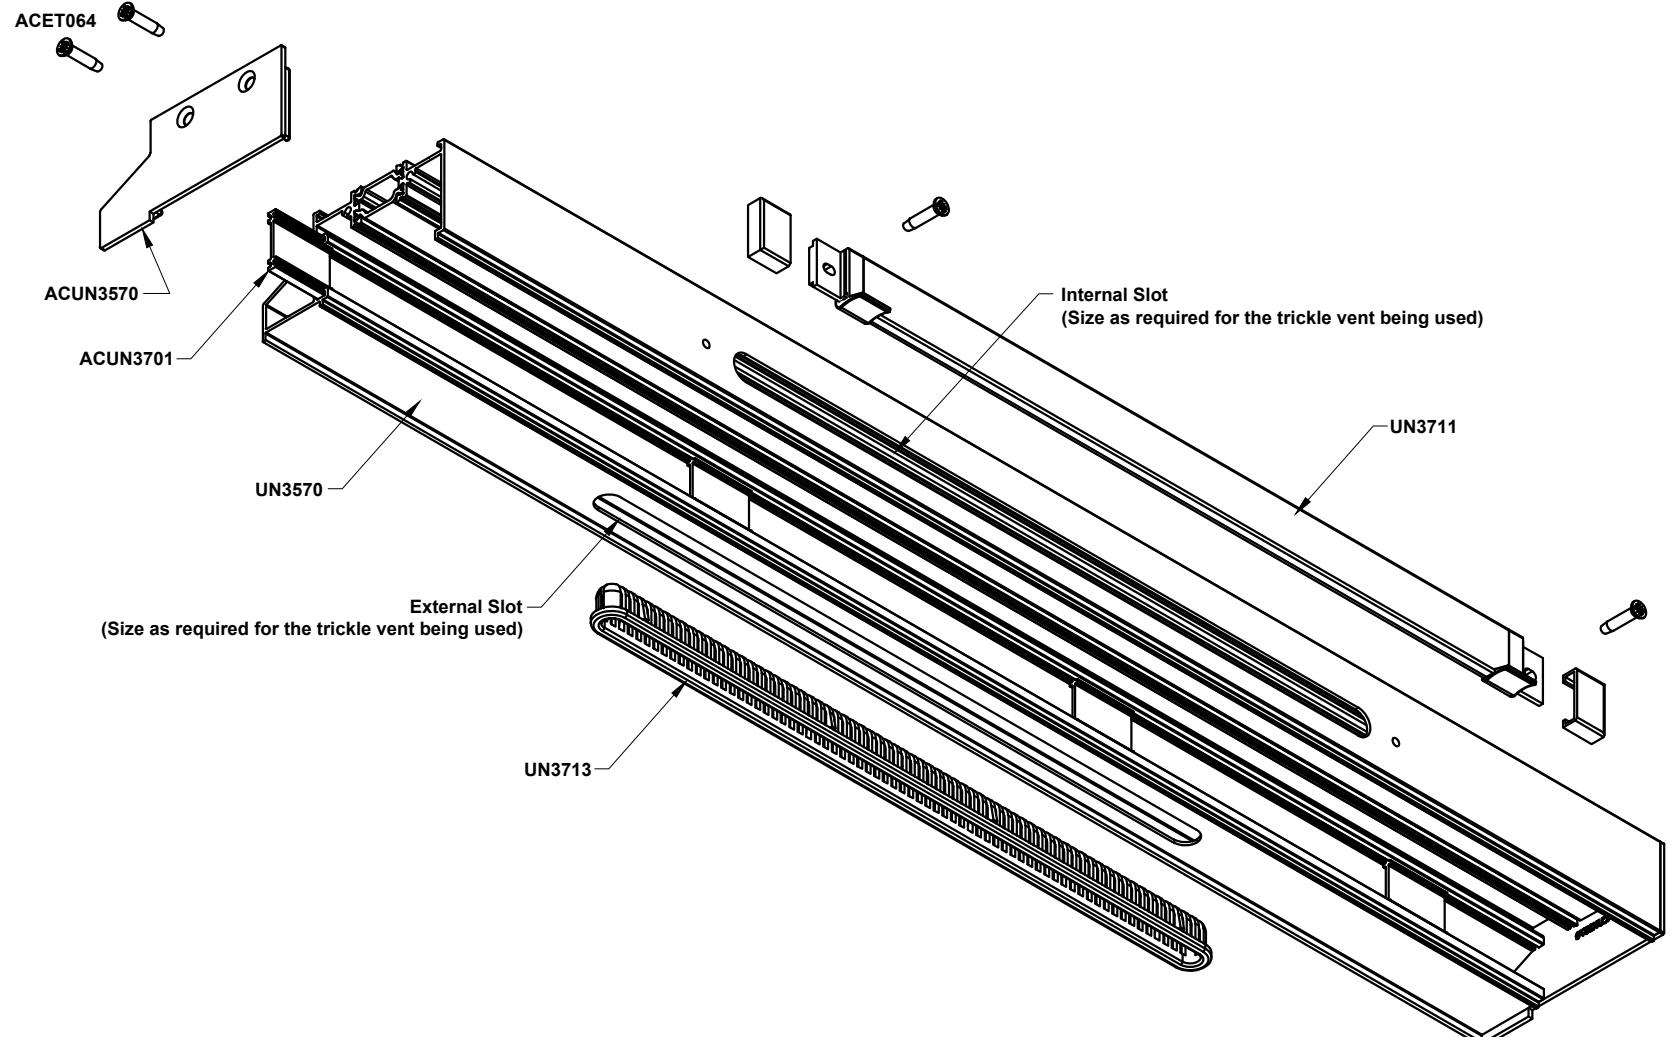UN3570 & UN3577



UN3711 with Push in Flyscreen
Equivalent area as per BS 13141-1:2019 = 3026mm²
Length = 400mm
Internal Slot Size = 340mm X 13mm
External Slot Size = 235mm X 16mm

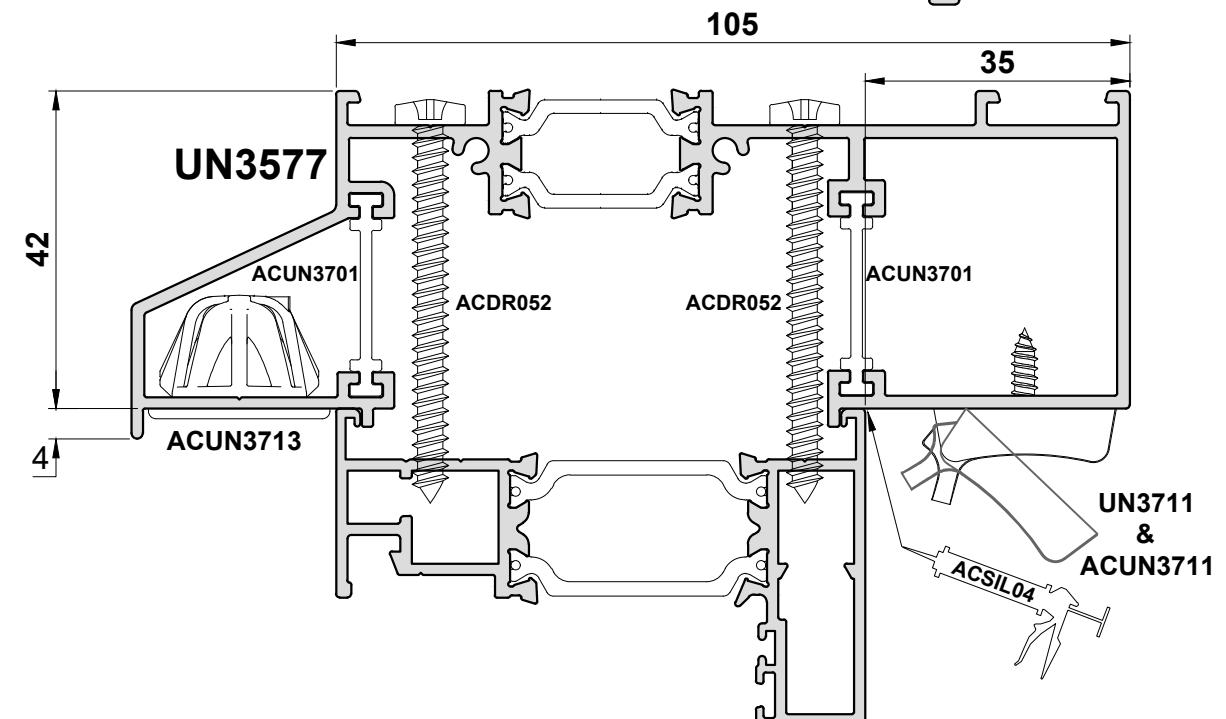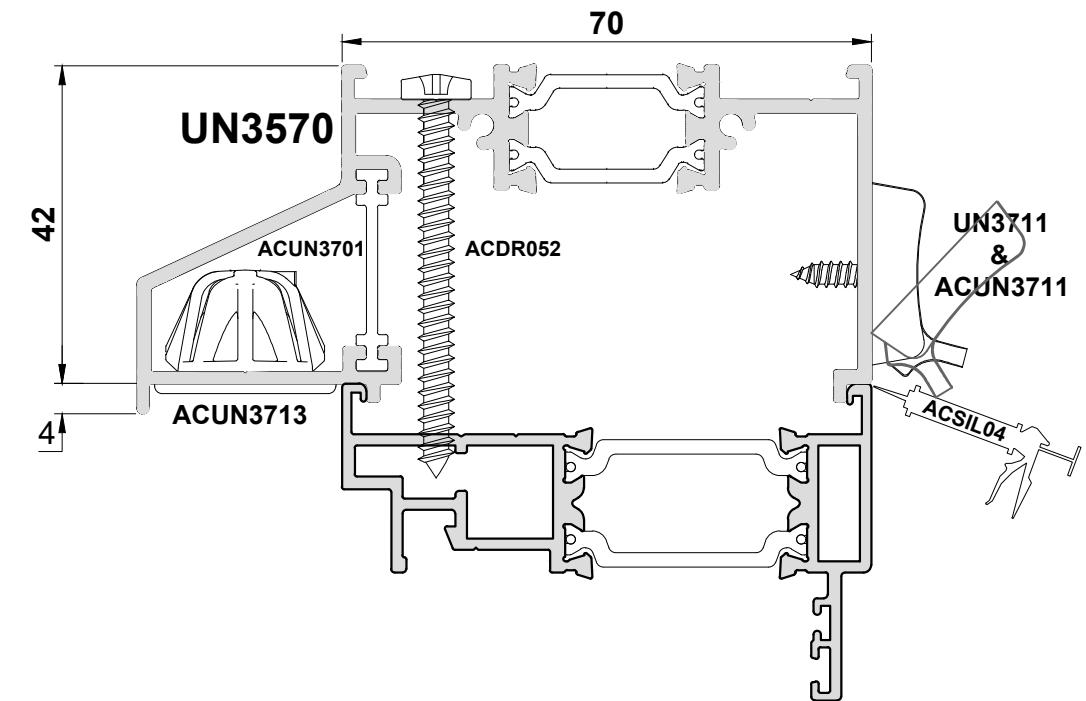UN3711 with Push in Flyscreen
Equivalent area as per BS 13141-1:2019 = 6132mm²
Length = 600mm
Internal Slot Size = 2 X (275mm X 13mm) + (10mm land)
External Slot Size = 2 X (235mm X 16mm) + (10mm land)



Section F



Sawing Tables

F03 - F11

Section F

Cutting Information




PART DESCRIPTIONS		TYPICAL STYLES														
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
	Transoms		W - 50		W - 50	W - 50	W - 50		OF to £M - 36.5	W - 50		OF to £M - 36.5	£M to £M - 23	W - 50	OF to £M - 36.5	W - 50
	Mullions							H - 50	H - 50	OF to £T - 36.5	H - 50	H - 50	H - 50	OF to £T - 36.5	H - 50	
Vent (1)	Horizontal Members			W - 38	W - 38	W - 38	W - 38	OF to £M - 24.5	W - 38							
	Vertical Members			H - 38	OF to £T - 24.5	OF to £T - 24.5	£T to £T - 11	H - 38	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	OF to £T - 24.5
	Glass Width			W - 138	W - 138	W - 138	W - 138	OF to £M - 124.5	W - 138							
	Glass Height			W - 138	OF to £T - 124.5	OF to £T - 124.5	£T to £T - 111	H - 138	H - 138	OF to £T - 124.5	H - 138	OF to £T - 124.5	H - 138	OF to £T - 124.5	OF to £T - 124.5	OF to £T - 124.5
Vent (2)	Horizontal Members					W - 38			OF to £M - 24.5			OF to £M - 24.5	£M to £M - 11	£M to £M - 11	OF to £M - 24.5	
	Vertical Members					OF to £T - 24.5			OF to £T - 24.5			OF to £T - 24.5				
	Glass Width					W - 138			OF to £M - 124.5			OF to £M - 124.5	£M to £M - 111	£M to £M - 111	OF to £M - 124.5	
	Glass Height					OF to £T - 124.5			OF to £T - 124.5			OF to £T - 124.5				
Fixed Pane (1)	Glass Width	W - 60	W - 60		W - 60		W - 60	OF to £M - 46.5	OF to £M - 46.5	W - 60	£M to £M - 33	£M to £M - 33	£M to £M - 33	W - 60	OF to £M - 46.5	W - 60
	Glass Height	H - 60	OF to £T - 46.5		OF to £T - 46.5		OF to £T - 46.5	H - 60	OF to £T - 46.5	H - 60	OF to £T - 46.5	H - 60	OF to £T - 46.5	H - 60	OF to £T - 46.5	

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
£T = Centre Line of Transom
£M = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

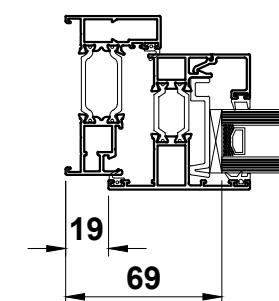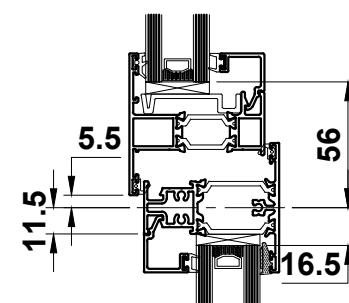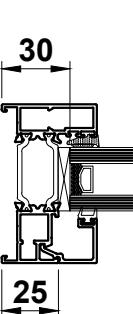Outer Frame: ETC4110, ETC4112
 Sash: ETC4129
 Fixed Light: Beaded
 Transom/Mullion: ETC4130



Do Not Scale From This Drawing

Alitherm 400

Cutting Information


PART DESCRIPTIONS		TYPICAL STYLES																
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W	
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	
	Transoms		W - 50		W - 50	W - 50	W - 50		OF to £M - 36.5	W - 50		OF to £M - 36.5	£M to £M - 23	W - 50	OF to £M - 36.5		W - 50	
	Mullions							H - 50	H - 50	OF to £T - 36.5	H - 50	H - 50	H - 50	OF to £T - 36.5	H - 50			
Vent (1)	Horizontal Members			W - 38	W - 38	W - 38	W - 38	OF to £M - 24.5	W - 38									
	Vertical Members			H - 38	OF to £T - 24.5	OF to £T - 24.5	£T to £T - 11	H - 38	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	OF to £T - 24.5		
	Glass Width			W - 118	W - 118	W - 118	W - 118	OF to £M - 104.5	W - 118									
	Glass Height			H - 118	OF to £T - 104.5	OF to £T - 104.5	OF to £T - 104.5	H - 118	H - 118	OF to £T - 104.5	H - 118	OF to £T - 104.5	H - 118	OF to £T - 104.5	OF to £T - 104.5	OF to £T - 104.5		
Vent (2)	Horizontal Members					W - 38			OF to £M - 24.5				OF to £M - 24.5	£M to £M - 11	£M to £M - 11	OF to £M - 24.5		
	Vertical Members					OF to £T - 24.5			OF to £T - 24.5				OF to £T - 24.5					
	Glass Width					OF to £M - 104.5			OF to £M - 104.5				OF to £M - 104.5	£M to £M - 91	£M to £M - 91	OF to £M - 104.5		
	Glass Height					OF to £T - 104.5			OF to £T - 104.5				OF to £T - 104.5					
Fixed Pane (1)	Glass Width	W - 60	W - 60		W - 60		W - 60	OF to £M - 46.5	OF to £M - 46.5	W - 60	£M to £M - 33	£M to £M - 33	£M to £M - 33	W - 60	OF to £M - 46.5	W - 60		
	Glass Height	H - 60	OF to £T - 46.5		OF to £T - 46.5		OF to £T - 46.5	H - 60	OF to £T - 46.5	H - 60	OF to £T - 46.5	H - 60	OF to £T - 46.5	OF to £T - 46.5	H - 60	OF to £T - 46.5		

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
£T = Centre Line of Transom
£M = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

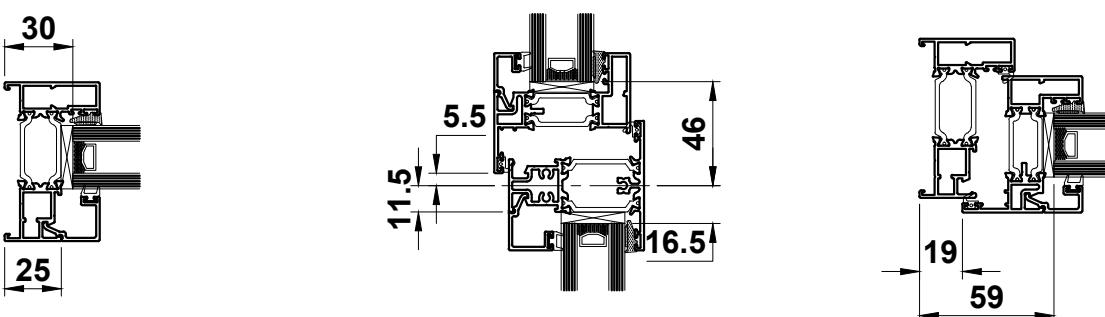Outer Frame: ETC4110, ETC4112
 Sash: ETC4120
 Fixed Light: Beaded
 Transom/Mullion: ETC4130



Do Not Scale From This Drawing

Cutting Information


PART DESCRIPTIONS		TYPICAL STYLES															
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W	
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	
	Transoms		W - 50		W - 50	W - 50	W - 50		OF to £M - 36.5	W - 50		OF to £M - 36.5	£M to £M - 23	W - 50	OF to £M - 36.5	W - 50	
	Mullions							H - 50	H - 50	OF to £T - 36.5	H - 50	H - 50	H - 50	OF to £T - 36.5	H - 50		
Vent (1)	Horizontal Members			W - 38	W - 38	W - 38	OF to £M - 24.5	W - 38									
	Vertical Members			H - 38	OF to £T - 24.5	OF to £T - 24.5	£T to £T - 11	H - 38	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	OF to £T - 24.5	
	Glass Width			W - 138	W - 138	W - 138	OF to £M - 124.5	W - 138									
	Glass Height			W - 138	OF to £T - 124.5	OF to £T - 124.5	OF to £T - 124.5	H - 138	H - 138	OF to £T - 124.5	H - 138	OF to £T - 124.5	H - 138	OF to £T - 124.5	OF to £T - 124.5	OF to £T - 124.5	
Vent (2)	Horizontal Members					W - 38			OF to £M - 24.5				OF to £M - 24.5	£M to £M - 11	£M to £M - 11	OF to £M - 24.5	
	Vertical Members					OF to £T - 24.5			OF to £T - 24.5				OF to £T - 24.5				
	Glass Width					W - 138			OF to £M - 124.5				OF to £M - 124.5	£M to £M - 111	£M to £M - 111	OF to £M - 124.5	
	Glass Height					OF to £T - 124.5			OF to £T - 124.5				OF to £T - 124.5				
Fixed Pane (1)	Horizontal Members	W - 38	W - 38		W - 38		W - 38	OF to £M - 24.5	OF to £M - 24.5	W - 38	£M to £M - 11	£M to £M - 11	£M to £M - 11	W - 38	£M to £M - 24.5	W - 38	
	Vertical Members	H - 38	OF to £T - 24.5		OF to £T - 24.5		OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	H - 38	H - 38	OF to £T - 24.5	OF to £T - 24.5	H - 38	OF to £T - 24.5	
	Glass Width	W - 95	W - 95		W - 95		W - 95	OF to £M - 81.5	OF to £M - 81.5	W - 95	£M to £M - 68	£M to £M - 68	£M to £M - 68	W - 95	OF to £M - 81.5	W - 95	
	Glass Height	H - 95	OF to £T - 81.5		OF to £T - 81.5		OF to £T - 81.5	H - 95	OF to £T - 81.5	OF to £T - 81.5	H - 95	H - 95	OF to £T - 81.5	OF to £T - 81.5	H - 95	OF to £T - 81.5	

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
£T = Centre Line of Transom
£M = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

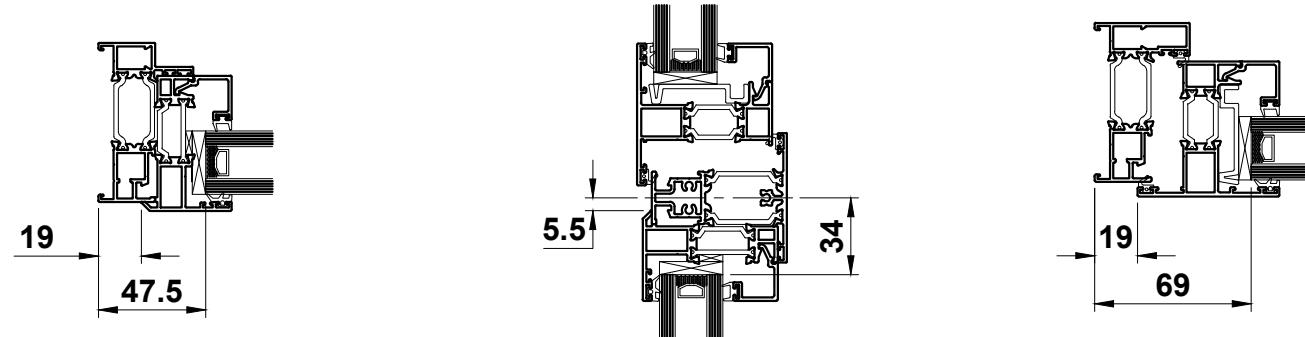Outer Frame: ETC4110, ETC4112
 Sash: ETC4129
 Fixed Light: ETC4147
 Transom/Mullion: ETC4130



Do Not Scale From This Drawing

Alitherm 400

Cutting Information


PART DESCRIPTIONS		TYPICAL STYLES														
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
	Transoms		W - 50		W - 50	W - 50	W - 50		OF to £M - 36.5	W - 50		OF to £M - 36.5	£M to £M - 23	W - 50	OF to £M - 36.5	W - 50
	Mullions							H - 50	H - 50	OF to £T - 36.5	H - 50	H - 50	H - 50	OF to £T - 36.5	H - 50	
Vent (1)	Horizontal Members			W - 38	W - 38	W - 38	W - 38	OF to £M - 24.5	W - 38							
	Vertical Members			H - 38	OF to £T - 24.5	OF to £T - 24.5	£T to £T - 11	H - 38	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	OF to £T - 24.5
	Glass Width			W - 118	W - 118	W - 118	W - 118	OF to £M - 104.5	W - 118							
	Glass Height			H - 118	OF to £T - 104.5	OF to £T - 104.5	£T to £T - 93	H - 118	H - 118	OF to £T - 104.5	H - 118	OF to £T - 104.5	H - 118	OF to £T - 104.5	OF to £T - 104.5	OF to £T - 104.5
Vent (2)	Horizontal Members					W - 38			OF to £M - 24.5			OF to £M - 24.5	£M to £M - 11	£M to £M - 11	OF to £M - 24.5	
	Vertical Members					OF to £T - 24.5			OF to £T - 24.5			OF to £T - 24.5				
	Glass Width					W - 118			OF to £M - 104.5			OF to £M - 104.5	£M to £M - 91	£M to £M - 91	£M to £M - 104.5	
	Glass Height					OF to £T - 104.5			OF to £T - 104.5			OF to £T - 104.5				
Fixed Pane (1)	Horizontal Members	W - 38	W - 38		W - 38		W - 38	OF to £M - 24.5	OF to £M - 24.5	W - 38	£M to £M - 11	£M to £M - 11	£M to £M - 11	W - 38	£M to £M - 24.5	W - 38
	Vertical Members	H - 38	OF to £T - 24.5		OF to £T - 24.5		OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	H - 38	OF to £T - 24.5	OF to £T - 24.5	H - 38	OF to £T - 24.5	
	Glass Width	W - 95	W - 95		W - 95		W - 95	OF to £M - 81.5	OF to £M - 81.5	W - 95	£M to £M - 68	£M to £M - 68	£M to £M - 68	W - 95	OF to £M - 81.5	W - 95
	Glass Height	H - 95	OF to £T - 81.5		OF to £T - 81.5		OF to £T - 81.5	H - 95	OF to £T - 81.5	OF to £T - 81.5	H - 95	OF to £T - 81.5	OF to £T - 81.5	H - 95	OF to £T - 81.5	

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
£T = Centre Line of Transom
£M = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

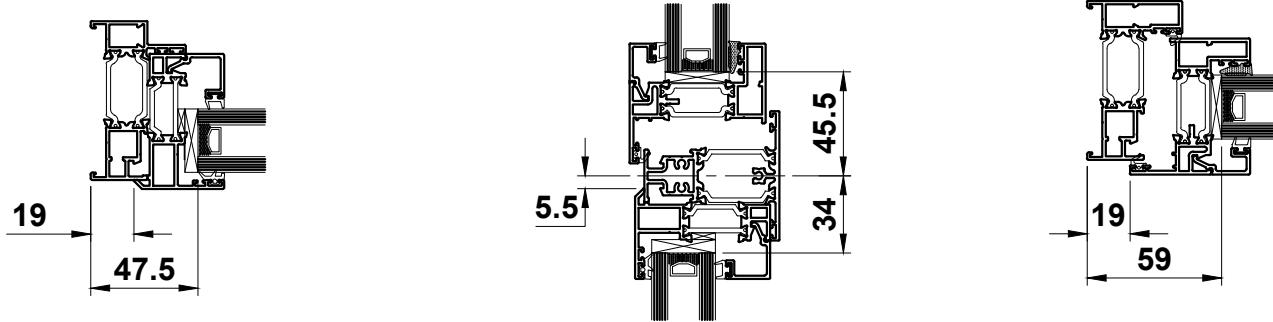Outer Frame: ETC4110, ETC4112
 Sash: ETC4120
 Fixed Light: ETC4147
 Transom/Mullion: ETC4130



Do Not Scale From This Drawing

Cutting Information


PART DESCRIPTIONS		TYPICAL STYLES															
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W	
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	
	Transoms		W - 28		W - 28	W - 28	W - 28		OF to εM - 17	W - 28		OF to εM - 17	εM to εM - 6	W - 28	OF to εM - 17	W - 28	
	Mullions							H - 28	H - 28	OF to εT - 17	H - 28	H - 28	H - 28	OF to εT - 17	H - 28		
Vent (1)	Horizontal Members			W - 38	W - 38	W - 38	W - 38	OF to εM - 27	W - 38								
	Vertical Members			H - 38	OF to εT - 27	OF to εT - 27	εT to εT - 16	H - 38	H - 38	OF to εT - 27	H - 38	OF to εT - 27	H - 38	OF to εT - 27	OF to εT - 27	OF to εT - 27	
	Glass Width			W - 138	W - 138	W - 138	W - 138	OF to εM - 127	W - 138								
	Glass Height			H - 138	OF to εT - 127	OF to εT - 127	OF to εT - 127	H - 138	H - 138	OF to εT - 127	H - 138	OF to εT - 127	H - 138	OF to εT - 127	OF to εT - 127	OF to εT - 127	
Vent (2)	Horizontal Members					W - 38			OF to εM - 27				OF to εM - 27	εM to εM - 16	εM to εM - 16	OF to εM - 27	
	Vertical Members					OF to εT - 27			OF to εT - 27			OF to εT - 27					
	Glass Width					W - 138			OF to εM - 127			OF to εM - 127	εM to εM - 116	εM to εM - 116	OF to εM - 127		
	Glass Height					OF to εT - 127			OF to εT - 127			OF to εT - 127					
Fixed Pane (1)	Glass Width	W - 60	W - 60		W - 60		W - 60	OF to εM - 49	OF to εM - 49	W - 60	εM to εM - 38	εM to εM - 38	εM to εM - 38	W - 60	OF to εM - 49	W - 60	
	Glass Height	H - 60	OF to εT - 49		OF to εT - 49		OF to εT - 49	H - 60	OF to εT - 49	OF to εT - 49	H - 60	OF to εT - 49	OF to εT - 49	H - 60	OF to εT - 49		

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
εT = Centre Line of Transom
εM = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

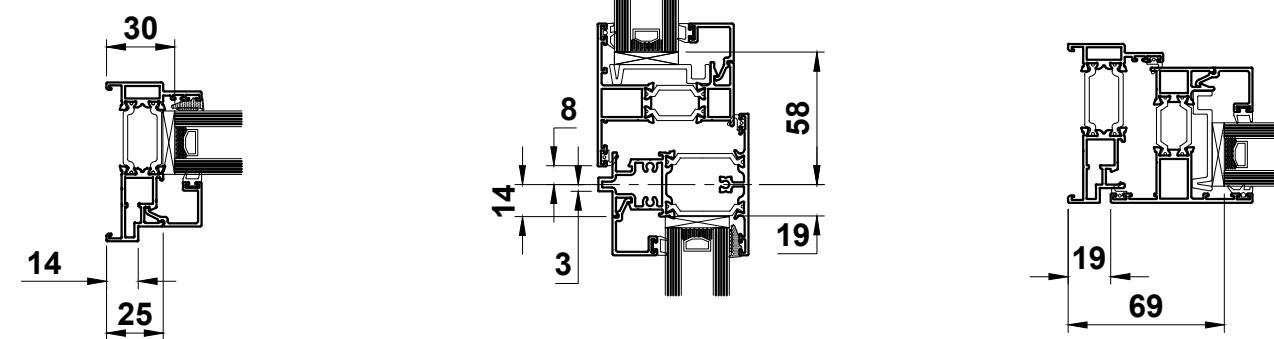Outer Frame: ETC4115
 Sash: ETC4129
 Fixed Light: Beaded
 Transom/Mullion: ETC4135



Do Not Scale From This Drawing

Alitherm 400


PART DESCRIPTIONS		TYPICAL STYLES														
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
	Transoms		W - 28		W - 28	W - 28		OF to εM - 17	W - 28		OF to εM - 17	εM to εM - 6	W - 28	OF to εM - 17	W - 28	
	Mullions						H - 28	H - 28	OF to εT - 17	H - 28	H - 28	H - 28	OF to εT - 17	H - 28		
Vent (1)	Horizontal Members			W - 38	W - 38	W - 38	OF to εM - 27	W - 38								
	Vertical Members			H - 38	OF to εT - 27	OF to εT - 27	εT to εT - 16	H - 38	H - 38	OF to εT - 27	H - 38	OF to εT - 27	H - 38	OF to εT - 27	OF to εT - 27	OF to εT - 27
	Glass Width			W - 113	W - 113	W - 113	OF to εM - 102	W - 113								
	Glass Height			H - 113	OF to εT - 102	OF to εT - 102	OF to εT - 102	H - 113	H - 113	OF to εT - 102	H - 113	OF to εT - 102	H - 113	OF to εT - 102	OF to εT - 102	OF to εT - 102
Vent (2)	Horizontal Members					W - 38			OF to εM - 27			OF to εM - 27	εM to εM - 16	εM to εM - 16	OF to εM - 27	
	Vertical Members					OF to εT - 27			OF to εT - 27			OF to εT - 27				
	Glass Width					W - 113			OF to εM - 102			OF to εM - 102	εM to εM - 102	εM to εM - 102	OF to εM - 102	
	Glass Height					OF to εT - 102			OF to εT - 102			OF to εT - 102				
Fixed Pane (1)	Glass Width	W - 60	W - 60		W - 60		W - 60	OF to εM - 49	OF to εM - 49	W - 60	εM to εM - 38	εM to εM - 38	εM to εM - 38	W - 60	OF to εM - 49	W - 60
	Glass Height	H - 60	OF to εT - 49		OF to εT - 49		OF to εT - 49	H - 60	OF to εT - 49	OF to εT - 49	H - 60	OF to εT - 49	OF to εT - 49	H - 60	OF to εT - 49	

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
εT = Centre Line of Transom
εM = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

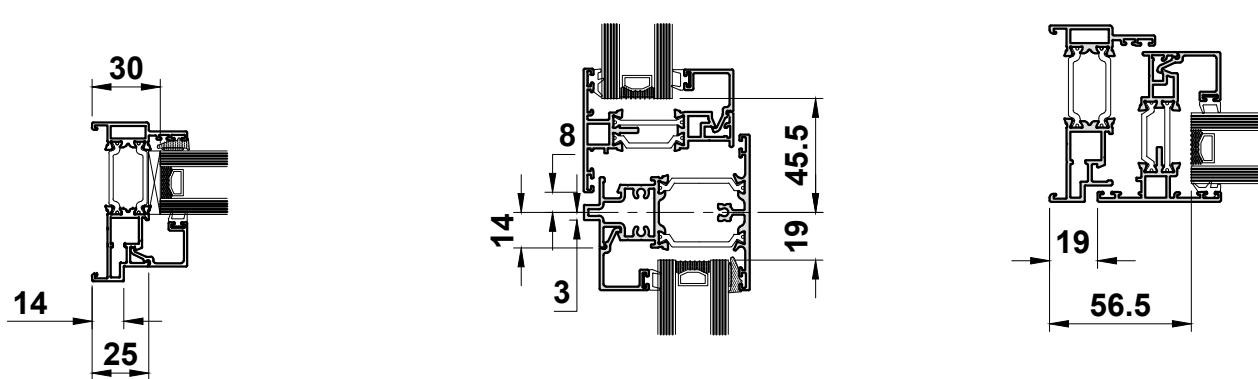Outer Frame: ETC4115
 Sash: ETC4124
 Fixed Light: Beaded
 Transom/Mullion: ETC4135



Do Not Scale From This Drawing


PART DESCRIPTIONS		TYPICAL STYLES															
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W	
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	
	Transoms		W - 65		W - 65	W - 65	W - 65		OF to £M - 44	W - 65		OF to £M - 44	£M to £M - 23	W - 65	OF to £M - 44	W - 65	
	Mullions							H - 65	H - 65	OF to £T - 44	H - 65	H - 65	H - 65	OF to £T - 44	H - 65		
Vent (1)	Horizontal Members			W - 53	W - 53	W - 53	W - 53	OF to £M - 32	W - 53								
	Vertical Members			H - 53	OF to £T - 32	OF to £T - 32	£T to £T - 11	H - 53	H - 53	OF to £T - 32	H - 53	OF to £T - 32	H - 53	OF to £T - 32	OF to £T - 32	OF to £T - 32	
	Glass Width			W - 127	W - 127	W - 127	W - 127	OF to £M - 106	W - 127								
	Glass Height			H - 127	OF to £T - 106	OF to £T - 106	OF to £T - 106	H - 127	H - 127	OF to £T - 106	H - 127	OF to £T - 106	H - 127	OF to £T - 106	OF to £T - 106	OF to £T - 106	
Vent (2)	Horizontal Members					W - 53			OF to £M - 32				OF to £M - 32	£M to £M - 11	£M to £M - 11	OF to £M - 32	
	Vertical Members					OF to £T - 32			OF to £T - 32				OF to £T - 32				
	Glass Width					W - 127			OF to £M - 106				OF to £M - 106	£M to £M - 86	£M to £M - 86	OF to £M - 106	
	Glass Height					OF to £T - 106			OF to £T - 106				OF to £T - 106				
Fixed Pane (1)	Glass Width	W - 75	W - 75		W - 75		W - 75	OF to £M - 54	OF to £M - 54	W - 75	£M to £M - 33	£M to £M - 33	£M to £M - 33	W - 75	OF to £M - 54	W - 75	
	Glass Height	H - 75	OF to £T - 54		OF to £T - 54		OF to £T - 54	H - 75	OF to £T - 54	OF to £T - 54	H - 75	OF to £T - 54	OF to £T - 54	H - 75	OF to £T - 54		

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
£T = Centre Line of Transom
£M = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

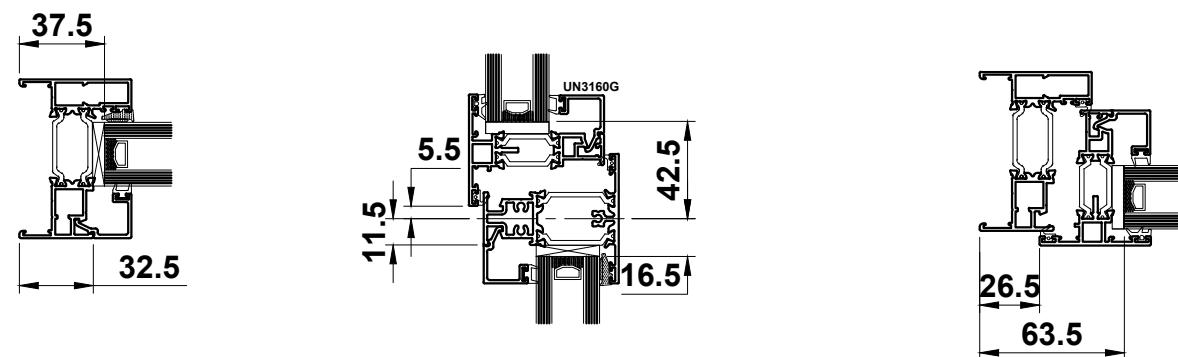Outer Frame: ETC4111
 Sash: ETC4124, ETC4125
 Fixed Light: Beaded
 Transom/Mullion: ETC4130



Do Not Scale From This Drawing

Alitherm 400



PART DESCRIPTIONS		TYPICAL STYLES														
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
	Transoms		W - 43		W - 43	W - 43			OF to £M - 24.5	W - 43		OF to £M - 24.5	£M to £M - 6	W - 43	OF to £M - 24.5	W - 43
	Mullions							H - 43	H - 43	OF to £T - 24.5	H - 43	H - 43	H - 43	OF to £T - 24.5	H - 43	
Vent (1)	Horizontal Members			W - 53	W - 53	W - 53	OF to £M - 34.5	W - 53								
	Vertical Members			H - 53	OF to £T - 34.5	OF to £T - 34.5	£T to £T - 16	H - 53	H - 53	OF to £T - 34.5	H - 53	OF to £T - 34.5	H - 53	OF to £T - 34.5	OF to £T - 34.5	OF to £T - 34.5
	Glass Width			W - 127	W - 127	W - 127	OF to £M - 108.5	W - 127								
	Glass Height			H - 127	OF to £T - 108.5	OF to £T - 108.5	OF to £T - 108.5	H - 127	H - 127	OF to £T - 108.5	H - 127	OF to £T - 108.5	H - 127	OF to £T - 108.5	OF to £T - 108.5	OF to £T - 108.5
Vent (2)	Horizontal Members					W - 53			OF to £M - 34.5			OF to £M - 34.5	£M to £M - 16	£M to £M - 16	OF to £M - 34.5	
	Vertical Members					OF to £T - 34.5			OF to £T - 34.5			OF to £T - 34.5				
	Glass Width					W - 127			OF to £M - 108.5			OF to £M - 108.5	£M to £M - 91	£M to £M - 91	OF to £M - 108.5	
	Glass Height					OF to £T - 108.5			OF to £T - 108.5			OF to £T - 108.5				
Fixed Pane (1)	Glass Width	W - 75	W - 75		W - 75		W - 75	OF to £M - 56.5	OF to £M - 56.5	W - 75	£M to £M - 38	£M to £M - 38	£M to £M - 38	W - 75	OF to £M - 56.5	W - 75
	Glass Height	H - 75	OF to £T - 56.5		OF to £T - 56.5		OF to £T - 56.5	H - 75	OF to £T - 56.5	H - 75	OF to £T - 56.5	H - 75	OF to £T - 56.5	H - 75	OF to £T - 56.5	

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
£T = Centre Line of Transom
£M = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

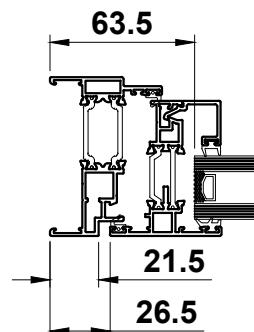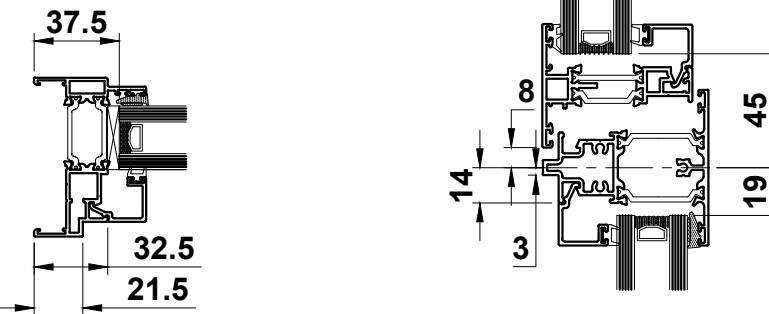Outer Frame: ETC4116
 Sash: ETC4124, ETC4125
 Fixed Light: Beaded
 Transom/Mullion: ETC4135



Do Not Scale From This Drawing

Alitherm 400




PART DESCRIPTIONS		TYPICAL STYLES														
Outer Frame	Head & Cill	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
	Jambs	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
	Transoms		W-90		W-90	W-90	W-90	O/F to CLM-56.5	W-90		O/F to CLM-56.5	CLM to CLM-23	W-90	O/F to CLM-56.5	W-90	
	Mullions						H-90	H-90	O/F to CLT-56.5	H-90	H-90	H-90	O/F to CLT-39	H-90		
Vent (1)	Horizontal Members			W-78	W-78	W-78	O/F to CLM-44.5	O/F to CLT-44.5	O/F to CLT-44.5	O/F to CLM-44.5	W-78					
	Vertical Members			H-78	O/F to CLT-44.5	O/F to CLT-44.5	CLT to CLT-11	H-78	H-78	O/F to CLT-44.5	H-78	O/F to CLT-44.5	O/F to CLT-44.5	O/F to CLT-44.5	O/F to CLT-44.5	
	Glass Width					W-78		O/F to CLM-44.5			O/F to CLM-44.5	CLM to CLM-11	CLM to CLM-11	O/F to CLM-44.5		
	Glass Height				O/F to CLT-44.5			O/F to CLT-44.5			O/F to CLT-44.5	O/F to CLT-44.5	O/F to CLT-44.5	O/F to CLT-44.5		
Vent (2)	Horizontal Members			W-178	W-178	W-178	O/F to CLM-144.5	W-178								
	Vertical Members			H-178	O/F to CLT-144.5	O/F to CLT-144.5	O/F to CLT-144.5	H-178	H-178	O/F to CLT-144.5	H-178	O/F to CLT-144.5	O/F to CLT-144.5	O/F to CLT-144.5	O/F to CLT-144.5	
	Glass Width					W-178		O/F to CLM-144.5			O/F to CLM-144.5	CLM to CLM-111	CLM to CLM-111	CLM to CLM-111		
	Glass Height				O/F to CLT-144.5			O/F to CLT-144.5			O/F to CLT-144.5	O/F to CLT-144.5	O/F to CLT-144.5	O/F to CLT-144.5		
Fixed Pane (1)	Glass Width	W-100	W-100		W-100		W-100	O/F to CLM -66.5	O/F to CLM -66.5	W-100	CLM to CLM -33	CLM to CLM -33	CLM to CLM -33	W-100	O/F to CLM -66.5	W-100
	Glass Height	H-100	O/F to CLT -66.5		O/F to CLT -66.5		O/F to CLT -66.5	H-100	O/F to CLT -66.5	H-100	O/F to CLT -66.5	O/F to CLT -66.5	O/F to CLT -66.5	H-100	O/F to CLT -66.5	

Legend

W = Outer Frame Width (Longest Leg)
H = Outer Frame Height (Longest Leg)
CT = Centre Line of Transom
CM = Centre Line of Mullion
OF = Edge of Outer Frame (Longest Leg)

Sections

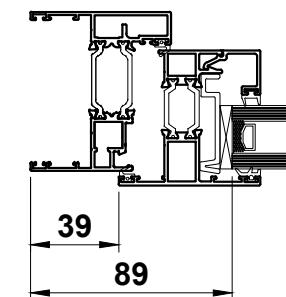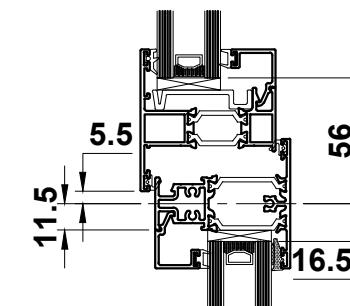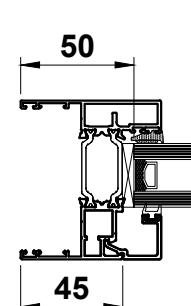Outer Frame: ETC4101
 Sash: ETC4129
 Fixed Light: Beaded
 Transom/Mullion: ETC4130



Do Not Scale From This Drawing

Alitherm 400

Do Not Scale From This Drawing